

INSTRUCTIONS FOR ASSEMBLY AND INSTALLATION

INSTRUCTION SHEET NO.

IS:8630

1090


READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE.

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.

The sloped ceiling adapter is made to be used with 8600 Series Power Jacks on ceilings from 0° to 90° (vertical).

1. Select the canopy (A) that comes with your Power Jack which has the large opening and snap it on the Power Jack.
2. Insert the plug end of the adapter (B) into the Power Jack.
3. Thread bushing (C) into the Power Jack.
4. Loosen knob (D) and set the lower half of the adapter to a vertical position and tighten knob (D) and bushing (C). **NOTE:** Hand tighten knob only.

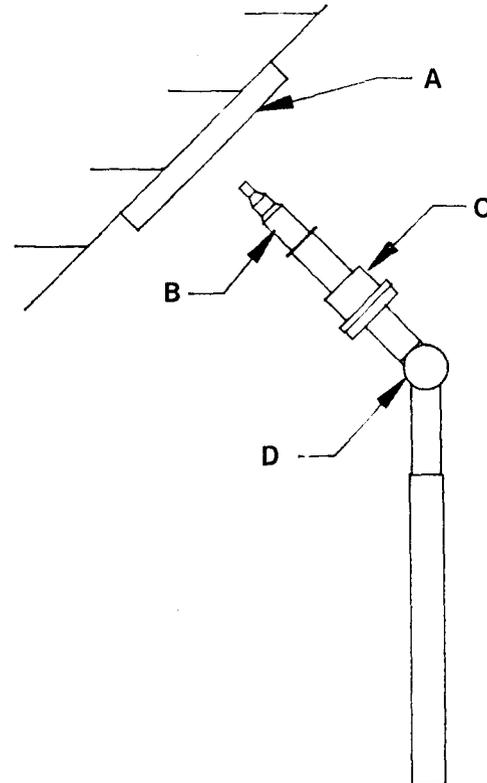

The sloped ceiling adapter is now ready for insertion of Focal Jacks or Extender Stems.

WARNING: When installed, Focal Jack must not contact building surface. Do not install Focal Jack closer than 12 inches from any curtain, or similar combustible material.