

Ordering Information

Catalog No.	Finishes	Track Mountings	Lamps
9178WH	Matte White	All Lytespan	MR16
9178BK	Matte Black	Track Systems	50W Max.
9178AL	Metallic Aluminum		

Features

- Lamp Bracket:** Stamped steel with insulated end knob made of high temperature silicone rubber which allows for aiming adjustments while fixture is on.
- Socket:** Bi-pin base ceramic socket wired with No. 18 stranded Teflon leads with fiberglass outer sleeve.
- Transformer:** Electronic low voltage transformer with integral radio frequency interference filter and anti-crossover circuit for increased reliability; housed in extruded aluminum.
- Track Attachment Fitting:** Molded polycarbonate, rotates into track and locks on with push tab; integral polarity key guard.
- Push Tab:** Locks and detaches unit from track.
- Brass Contact:** Extends up for connection to second circuit when used with Advent® Lytespan track.
- Tension Pivot Mounts:** Steel. Allows for 180° horizontal rotation and 180° vertical rotation.
- Lamp Guard:** Tempered glass; can be substituted with 2" filter.
- Spring:** Steel springs hold lamp in place.
- Housing:** Steel wire mesh.

Electrical/Dimming

Dimming controls: Use only dimmers specifically designed for use with electronic transformers, like Lightolier Sunrise™ and Neptune Momentum QE™ series. Low voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Labels


UL

Patent Pending

Advent® is a registered trademark of Lightolier.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 Genlyte Group LLC • A0706




Lighting Data

Aiming Angle:

- L** Beam length
- W** Beam width
- C** Distance to center of beam
- D** Distance
- A** Aiming angle
- FC** Footcandles

L and **W** are the outer points where the candlepower drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

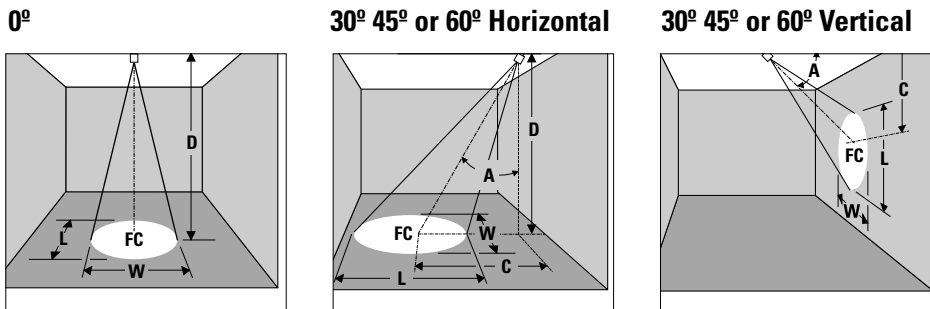

Lamp

Lamp	50% Max CP	C.P. Candelas	Life-Hrs	0° Aiming Angle					A = 30° Aiming Angle					A = 45° Aiming Angle					A = 60° Aiming Angle				
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	
10W MR16 (T-H) VNSP (EZZ) 7°	8200	3000	7'	167	0.9'	0.9'	6'	3.5'	148	1.0'	0.8'	4'	4.0'	181	1.0'	0.7'	2'	3.5'	256	1.0'	0.5'		
			10'	82	1.2'	1.2'	9'	5.2'	68	1.5'	1.3'	6'	6.0'	81	1.5'	1.0'	3'	5.2'	114	1.5'	0.7'		
			13'	49	1.6'	1.6'	12'	6.9'	37	2.0'	1.7'	8'	8.0'	45	2.0'	1.4'	4'	6.9'	64	2.0'	1.0'		
			16'	32	2.0'	2.0'	15'	8.7'	24	2.4'	2.1'	10'	10.0'	29	2.5'	1.7'	5'	8.7'	41	2.5'	1.2'		
10W MR16 (T-H) NSP (ESX) 13°	3600	3000	6'	100	1.4'	1.4'	5'	2.9'	94	1.5'	1.3'	3'	3.0'	141	1.4'	1.0'	2'	3.5'	113	1.9'	0.9'		
			8'	56	1.8'	1.8'	7'	4.0'	48	2.1'	1.8'	5'	5.0'	51	2.3'	1.6'	3'	5.2'	50	2.8'	1.4'		
			10'	36	2.3'	2.3'	9'	5.2'	29	2.7'	2.4'	7'	7.0'	26	3.2'	2.3'	4'	6.9'	28	3.8'	1.8'		
			12'	25	2.7'	2.7'	11'	6.4'	19	3.4'	2.9'	9'	9.0'	16	4.2'	2.9'	5'	8.7'	18	4.7'	2.3'		
10W MR16 (T-H) FL (BAB) 40°	525	4000	2'	131	1.5'	1.5'	2'	1.2'	85	2.0'	1.7'	2'	2.0'	46	3.4'	2.1'	1'	1.7'	66	4.8'	1.5'		
			3'	58	2.2'	2.2'	3'	1.7'	38	3.0'	2.5'	3'	3.0'	21	5.0'	3.1'	2'	3.5	16	8.7'	2.9'		
			4'	33	2.9'	2.9'	4'	2.3'	21	4.1'	3.4'	4'	4.0'	12	6.7'	4.1'	3'	5.2'	7	14.5'	4.4'		
			5'	21	3.6'	3.6'	5'	2.9'	14	5.1'	4.2'	5'	5.0'	7	8.4'	5.1'	4'	6.9'	4	19.3'	5.8'		
15W MR16 (T-H) NSP (FRB) 12°	6700	4000	7'	178	1.5'	1.5'	6'	3.5'	157	1.7'	1.5'	4'	4.0'	192	1.7'	1.2'	2'	3.5'	272	1.7'	0.8'		
			10'	87	2.1'	2.1'	9'	5.2'	70	2.5'	2.2'	6'	6.0'	85	2.6'	1.8'	3'	5.2'	121	2.6'	1.3'		
			13'	51	2.7'	2.7'	12'	6.9'	39	3.4'	2.9'	8'	8.0'	48	3.4'	2.4'	4'	6.9'	68	3.5'	1.7'		
			16'	34	3.4'	3.4'	15'	8.7'	25	4.2'	3.6'	10'	10.0'	31	4.3'	3.0'	5'	8.7'	44	4.3'	2.1'		
15W MR16 (T-H) SP (FRA) 20°	3900	4000	6'	108	2.1'	2.1'	5'	2.9'	101	2.4'	2.0'	3'	3.0'	153	2.2'	1.5'	2'	3.5'	122	3.1'	1.4'		
			8'	61	2.8'	2.8'	7'	4.0'	52	3.3'	2.9'	5'	5.0'	55	3.6'	2.5'	3'	5.2'	54	4.7'	2.1'		
			10'	39	3.5'	3.5'	9'	5.2'	31	4.3'	3.7'	7'	7.0'	28	5.1'	3.5'	4'	6.9'	30	6.2'	2.8'		
			12'	27	4.2'	4.2'	11'	6.4'	21	5.2'	4.5'	9'	9.0'	17	6.6'	4.5'	5'	8.7'	20	7.8'	3.5'		
15W MR16 (T-H) FL (FMW) 40°	1600	4000	4'	100	2.9'	2.9'	3'	1.7'	115	3.0'	2.5'	3'	3.0'	63	5.0'	3.1'	1'	1.7'	200	4.8'	1.5'		
			6'	44	4.4'	4.4'	5'	2.9'	42	5.1'	4.2'	4'	4.0'	35	6.7'	4.1'	2'	3.5	50	9.7'	2.9'		
			8'	25	5.8'	5.8'	7'	4.0'	21	7.1'	5.9'	5'	5.0'	23	8.4'	5.1'	3'	5.2'	22	14.5'	4.4'		
			10'	16	7.3'	7.3'	9'	5.2'	13	9.1'	7.6'	6'	6.0'	16	10.1'	6.2'	4'	6.9'	13	19.3'	5.8'		
2W MR16 (T-H) VNSP (EZY) 9°	13100	3500	8'	205	1.3'	1.3'	7'	4.0'	174	1.5'	1.3'	5'	5.0'	185	1.6'	1.1'	3'	5.2'	182	1.9'	0.9'		
			12'	91	1.9'	1.9'	10'	5.8'	85	2.1'	1.8'	7'	7.0'	95	2.2'	1.6'	4'	6.9'	102	2.6'	1.3'		
			16'	51	2.5'	2.5'	13'	7.5'	50	2.7'	2.4'	9'	9.0'	57	2.9'	2.0'	5'	8.7'	66	3.2'	1.6'		
			20'	33	3.1'	3.1'	15'	9.2'	33	3.4'	2.9'	11'	11.0'	38	3.5'	2.4'	6'	10.4'	45	3.8'	1.9'		
2W MR16 (T-H) NFL (EYS) 27°	2400	4000	4'	150	1.9'	1.9'	3'	1.7'	173	2.0'	1.7'	3'	3.0'	94	3.1'	2.0'	1'	1.7'	300	2.3'	1.0'		
			6'	67	2.9'	2.9'	5'	2.9'	62	3.3'	2.8'	4'	4.0'	53	4.1'	2.7'	2'	3.5	75	4.6'	1.9'		
			8'	38	3.8'	3.8'	7'	4.0'	32	4.6'	3.9'	5'	5.0'	34	5.1'	3.4'	3'	5.2'	33	7.0'	2.9'		
			10'	24	4.8'	4.8'	9'	5.2'	19	5.9'	5.0'	6'	6.0'	24	6.1'	4.1'	4'	6.9'	19	9.3'	3.8'		
10W MR16 (T-H) NSP (EXT) 14°	10200	4000	8'	159	2.0'	2.0'	7'	4.0'	135	2.3'	2.0'	5'	5.0'	144	2.5'	1.7'	3'	5.2'	142	3.1'	1.5'		
			12'	71	2.9'	2.9'	10'	5.8'	66	3.3'	2.8'	7'	7.0'	74	3.5'	2.4'	4'	6.9'	80	4.1'	2.0'		
			16'	40	3.8'	3.9'	13'	7.5'	39	4.3'	3.7'	9'	9.0'	45	4.5'	3.1'	5'	8.7'	51	5.1'	2.5'		
			20'	26	4.9'	4.9'	15'	9.2'	28	5.3'	4.5'	11'	11.0'	30	5.5'	3.8'	6'	10.4'	35	6.2'	2.9'		
10W MR16 (T-H) NFL (EXZ) 27°	3400	4000	6'	94	2.9'	2.9'	5'	2.9'	88	3.3'	2.8'	3'	3.0'	134	3.1'	2.0'	2'	3.5'	106	4.6'	1.9'		
			8'	53	3.8'	3.8'	7'	4.0'	45	4.6'	3.9'	5'	5.0'	48	5.1'	3.4'	3'	5.2'	47	7.0'	2.9'		
			10'	34	4.8'	4.8'	9'	5.2'	27	5.9'	5.0'	7'	7.0'	25	7.1'	4.8'	4'	6.9'	27	9.3'	3.8'		
			12'	24	5.8'	5.8'	11'	6.4'	18	7.2'	6.1'	9'	9.0'	15	9.2'	6.1'	5'	8.7'	17	11.6'	4.8'		
10W MR16 (T-H) FL (EXN) 40°	1850	4000	4'	116	2.9'	2.9'	3'	1.7'	134	3.0'	2.5'	3'	3.0'	73	5.0'	3.1'	1'	1.7'	231	4.8'	1.5'		
			6'	51	4.4'	4.4'	5'	2.9'	48	5.1'	4.2'	4'	4.0'	41	6.7'	4.1'	2'	3.5	59	9.7'	2.9'		
			8'	29	5.8'	5.8'	7'	4.0'	25	7.1'	5.9'	5'	5.0'	26	8.4'	5.1'	3'	5.2'	26	14.5'	4.4'		
			10'	19	7.3'	7.3'	9'	5.2'	15	9.1'	7.6'	6'	6.0'	18	10.1'	6.2'	4'	6.9'	14	19.3'	5.8'		
10W MR16 (T-H) WFL (FNV) 55°	1150	4000	3'	128	3.1'	3.1'	3'	1.7'	83	4.6'	3.6'	2'	2.0'	102	5.7'	2.9'	1'	1.7'	144	22.3'	2.1'		
			5'	46	5.2'	5.2'	5'	2.9'	30	7.8'	6.0'	3'	3.0'	45	8.6'	4.4'	2'	3.5	36	44.5'	4.2'		
			7'	23	7.3'	7.3'	7'	4.0'	15	10.7'	8.4'	4'	4.0'	25	11.4'	5.8'	3'	5.2'	16	66.8'	6.2'		
			9'	14	9.4'	9.4'	9'	5.2'	9	13.7'	10.8'	5'	5.0'	15	14.3'	7.4'	4'	6.9'	9	89.1'	8.3'		

Job Information Type:

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 Genlyte Group LLC • A0706

LIGHTOLIER®