

**Ordering Information**

Catalog No.	Finish	Mounting	Lamps
<b>22MW4WH</b>	Matte White	All Lytespan Track Systems.	12V 50W Max. T4 2-pin GY6.35 base lamp. (Clear Only)
<b>22MW4BK</b>	Matte Black	Does not mount on ProSpec Track.	Use Philips or Sylvania lamps only, must be 1 3/4" MOL.
<b>22MW4AL</b>	Metallic Aluminum		Transverse or C-6 filament recommended.

**Features**

- Transformer:** Class two electronic transformer for 12v halogen lamps
- Track Attachment Fitting:** Molded polycarbonate; rotates into track
- Brass Contact:** Extends for connection to second circuit  
(Advent Lytespan track only)
- Horizontal Pivot:** Wireless stem profile with infinite horizontal rotation
- Vertical Pivot:** 0-90° vertical adjustment
- Socket:** Bi-pin multipoint contact low voltage halogen socket
- Housing:** Die cast aluminum
- Smoothing Lens:** Meets UL standards for use with unshielded lamps

**Finish**

All Painted finishes are baked enamel.

**Dimming**

Use only dimmers specifically designed for use with electronic transformers. Low voltage fixtures may produce audible sound when dimmed.

**Accessories**

- Accessory Holder:** None
- Accessories:** None
- Lens:** None
- Louwer:** None
- Snoot Accessory:** None

**Labels**


UL, cUL

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	



## Lighting Data

### Footcandles on wall:

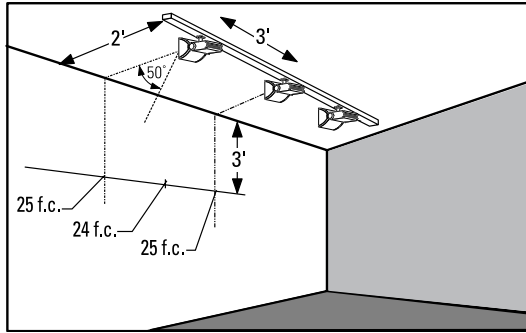

### Lamp Information:

50W 12V T4  
Lumens: 950  
Rated Avg. life: 2,000 hrs.

**EXAMPLE:** With track located 2' from wall and multiple units spaced 3' on center and aimed 50° from horizontal, the illumination on wall 3' from ceiling will be 25 f.c. beneath units and 24 f.c. between units.

### Footcandles on Wall

#### Track 2 Feet From Wall

#### Single Unit

Distance From Ceiling	Beam Center				
	0'	1'	2'	3'	4'
1'	51	36	7	1	1
2'	45	30	12	2	1
3'	19	15	9	3	1
4'	8	7	5	3	1
5'	4	4	3	2	1
6'	2	2	2	2	1
7'	1	1	1	1	1
8'	1	1	1	1	1

#### Multiple Units

2' Spacing		3' Spacing			4' Spacing				
1'	71	78	70	58	45	58	56	15	56
2'	72	67	71	52	44	52	49	24	49
3'	38	35	37	25	24	25	20	18	20
4'	20	18	19	13	13	13	10	10	10
5'	12	11	11	8	8	8	6	6	6
6'	8	8	7	6	5	6	4	4	4
7'	5	5	5	4	4	4	3	3	3
8'	4	4	3	3	3	3	2	2	2

#### Track 3 Feet From Wall

#### Single Unit

Distance From Ceiling	Beam Center				
	0'	1'	2'	3'	4'
1'	23	21	11	3	1
2'	23	17	11	4	1
3'	20	16	11	5	2
4'	12	10	8	5	2
5'	6	5	4	3	2
6'	3	3	3	2	2
7'	2	2	2	2	1
8'	1	1	1	1	1

#### Multiple Units

3' Spacing		4' Spacing			5' Spacing				
1'	28	33	28	24	23	24	23	14	23
2'	31	31	31	25	22	25	23	16	23
3'	32	30	32	24	23	24	22	17	22
4'	22	21	23	17	16	17	14	13	14
5'	13	13	14	10	10	10	8	8	8
6'	9	8	9	7	6	7	5	5	5
7'	6	6	6	5	5	5	4	4	4
8'	4	5	4	4	4	4	3	3	3

### Job Information

### Type:

Lightolier a Genlyte company [www.lightolier.com](http://www.lightolier.com)  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
© 2007 Genlyte Group LLC • C1007