


Horizontal Flood

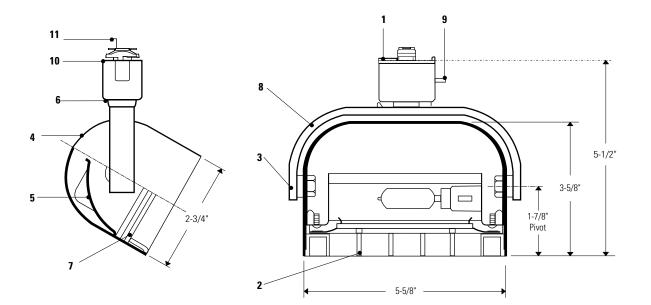

Ordering Information

Catalog No.	Finishes	Mounting	Lamps	
6422MC 6423MC	Matte White Matte Black	All Lytespan Track System	150W T-4 Frosted (ETH)Tungsten-Halogen Minican Screw Base	

Features

- 1. Lytespan Attachment Fitting: Molded polycarbonate. Integral color. Fitter twists onto track and locks on.
- 2. Louver: Die-cast aluminum with parallel blades for low brightness and glare control. Matte black finish.
- 3. Trunnion Mounting: Permanently-tensioned with internal spring washer and vibration-resistant nut
- 4. Housing: .040 aluminum.
- 5. Reflector: Embossed anodized clear aluminum.
- 6. Pivot Mounting: Permanently-tensioned; 350° stop
- 7. Lamp Guard: Tempered glass.
- 8. Yoke: Extruded aluminum
- 9. Push Tab: Molded polycarbonate Detaches unit
- 10. Polarity Keyway
- 11. Movable Brass Contact: Extends for connection to 2nd circuit in Advent Lytespan Track.

Electrical

Minican screw base, No. 18 Teflon leads.

Finish

All painted finishes are powder coated baked enamel.

Labels

UL, I.B.E.W.

Job Information Type: Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

www.lightolier.com

Lightolier a Genlyte Thomas Company Technical Information: (978) 657-7600 • Fax (978) 658-0595 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2002 Genlyte Thomas Group LLC (Lightolier Division) A0902

Ģ
I
0