

Ordering Information

Catalog No.	Mounting	Finish	Lamps
8258WH	All Lytespan	Matte White	PAR30, 75W Max.
8258BK	Track Systems	Matte Black	(Tungsten-Halogen)

Features

- Lytespan Attachment Fitting:** molded polycarbonate. Integral color. Fitting twists onto track and locks in place.
- Movable Brass Contact:** extends for 2nd circuit in Advent™ Lytespan Track.
- Lamp Retainer:** silicone Rubber. Temperature range -- 65°F to +600°F. Integral color.
- Socket Cover:** molded Valox®. Integral color. Matte finish.
- Trunion Mounting:** permanently tensioned with internal spring washer. 90° stop for vertical adjustment (UL requirement).
- Fitting Housing:** die-cast aluminum.
- Wire Form Ring:** 1/4" Dia. formed steel rod. Chrome plated.
- Push Tab:** integral to fitting. Detaches unit.
- Pivot Mounting:** permanently tensioned, 350° stop.

Electrical

Porcelain socket, medium base, nickel plated screw shell. No. 18 braided SF-1 leads with a silicone sleeving.

Options & Accessories

3 1/2" Beam Smoother, Beam Elongator, Louver and Barndoors. All require Accessory Holder 8593.

See Lightolier Specification Sheets AF2LF and AF2AS.

Finish

All painted finishes baked enamel.

Labels

UL, I.B.E.W.

Patents

Products shown here are protected by applicable patents and patents pending.

Valox® is a registered trademark of General Electric.

Advent™ is a registered trademark of Lightolier.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte Thomas Company


www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®




Lighting Data

Aiming Angle:

- L** Beam length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming angle
- FC** Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

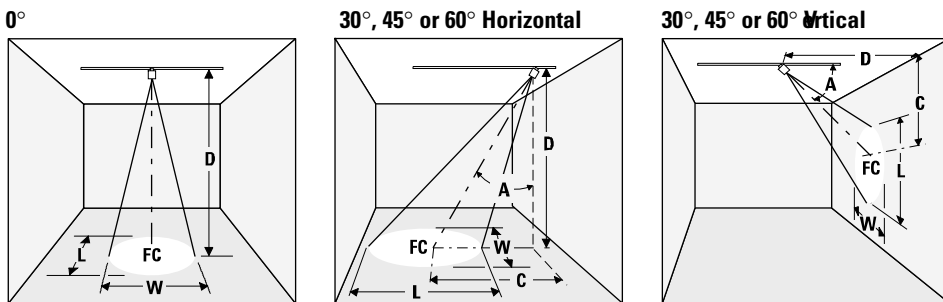

LAMP

Lamp	Beam Spread 50% Max. CP	Beam Center C.P. Candelas	Rated Life-Hrs
50W PAR30 NSP (Halogen)	8°	9,200	2,000
50W PAR30 NSP (Halogen-IR)	8°	17,000	3,000
50W PAR30 NFL (Halogen)	25°	2,000	2,000
50W PAR30 NFL (Halogen-IR)	25°	3,000	3,000
50W PAR30 FL (Halogen)	35°	1,400	2,500
50W PAR30 FL (Halogen-IR)	37°	1,600	3,000
75W PAR30 NSP (Halogen)	9°	14,000	2,500
75W PAR30 NFL (Halogen)	30°	3,200	2,500
75W PAR30 FL (Halogen)	40°	2,000	2,500

0° AIMING ANGLE A=30° AIMING ANGLE A=45° AIMING ANGLE A=60° AIMING ANGLE

0°				A=30°				A=45°				A=60°						
D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
7'	188	1.0'	1.0'	6'	3.5'	166	1.1'	1.0'	4'	4.0'	203	1.1'	0.8'	2'	3.5'	288	1.1'	0.6'
10'	92	1.4'	1.4'	9'	5.2'	74	1.7'	1.5'	6'	6.0'	90	1.7'	1.2'	3'	5.2'	128	1.7'	0.8'
13'	54	1.8'	1.8'	12'	6.9'	41	2.2'	1.9'	8'	8.0'	51	2.2'	1.6'	4'	6.9'	72	2.3'	1.1'
16'	36	2.2'	2.2'	15'	8.7'	27	2.8'	2.4'	10'	10.0'	33	2.8'	2.0'	5'	8.7'	46	2.8'	1.4'
8'	266	1.1'	1.1'	7'	4.0'	225	1.3'	1.1'	5'	5.0'	240	1.4'	1.0'	3'	5.2'	236	1.7'	0.8'
12'	118	1.7'	1.7'	10'	5.8'	110	1.9'	1.6'	7'	7.0'	123	2.0'	1.4'	4'	6.9'	133	2.3'	1.1'
16'	66	2.2'	2.2'	13'	7.5'	65	2.4'	2.1'	9'	9.0'	74	2.5'	1.8'	5'	8.7'	85	2.8'	1.4'
20'	43	2.8'	2.8'	16'	9.2'	43	3.0'	2.6'	11'	11.0'	50	3.1'	2.2'	6'	10.4'	59	3.4'	1.7'
4'	125	1.8'	1.8'	3'	1.7'	144	1.8'	1.5'	3'	3.0'	79	2.8'	1.9'	1'	1.7'	250	2.1'	0.9'
6'	58	2.7'	2.7'	5'	2.9'	52	3.0'	2.6'	4'	4.0'	44	3.7'	2.5'	2'	3.5'	63	4.2'	1.8'
8'	31	3.5'	3.5'	7'	4.0'	27	4.2'	3.6'	5'	5.0'	28	4.7'	3.1'	3'	5.2'	28	6.2'	2.7'
10'	20	4.4'	4.4'	9'	5.2'	16	5.4'	4.5'	6'	6.0'	20	5.6'	3.8'	4'	6.9'	16	8.3'	3.5'
6'	83	2.7'	2.7'	5'	2.9'	78	3.0'	2.6'	3'	3.0'	118	2.8'	1.9'	2'	3.5'	94	4.2'	1.8'
8'	47	3.5'	3.5'	7'	4.0'	40	4.2'	3.6'	5'	5.0'	42	4.7'	3.1'	3'	5.2'	42	6.2'	2.7'
10'	30	4.4'	4.4'	9'	5.2'	24	5.4'	4.6'	7'	7.0'	22	6.5'	4.4'	4'	6.9'	23	8.3'	3.5'
12'	21	5.3'	5.3'	11'	6.4'	16	6.6'	5.6'	9'	9.0'	12	8.4'	5.6'	5'	8.7'	15	10.4'	4.4'
3'	158	1.9'	1.9'	3'	1.7'	101	2.6'	2.2'	2'	2.0'	124	2.8'	1.8'	1'	1.7'	175	3.6'	1.3'
5'	56	3.2'	3.2'	5'	2.9'	36	4.3'	3.6'	3'	3.0'	55	4.2'	2.7'	2'	3.5'	44	7.2'	2.5'
7'	29	4.4'	4.4'	7'	4.0'	19	6.1'	5.1'	4'	4.0'	31	5.6'	3.8'	3'	5.2'	19	10.8'	3.8'
9'	17	5.7'	5.7'	9'	5.2'	11	7.8'	6.6'	5'	5.0'	20	7.0'	4.5'	4'	6.9'	11	14.4'	5.0'
3'	178	2.0'	2.0'	3'	1.7'	115	2.8'	2.3'	2'	2.0'	141	3.0'	1.9'	1'	1.7	200	4.0'	1.3'
5'	64	3.3'	3.3'	5'	2.9'	42	4.6'	3.9'	3'	3.0'	63	4.5'	2.8'	2'	3.5'	50	8.1'	2.7'
7'	33	4.7'	4.7'	7'	4.0'	21	6.5'	5.4'	4'	4.0'	35	6.0'	3.8'	3'	5.2'	22	12.1'	4.0'
9'	20	6.0'	6.0'	9'	5.2'	13	8.3'	7.0'	5'	5.0'	23	7.5'	4.7'	4'	6.9'	13	18.1'	5.4'
8'	219	1.3'	1.3'	7'	4.0'	186	1.5'	1.3'	5'	5.0'	198	1.6'	1.1'	3'	5.2'	184	1.9'	0.9'
12'	97	1.9'	1.9'	10'	5.8'	91	2.1'	1.8'	7'	7.0'	101	2.2'	1.6'	4'	6.8'	109	2.6'	1.3'
16'	55	2.5'	2.5'	13'	7.5'	54	2.7'	2.4'	9'	9.0'	61	2.9'	2.0'	5'	8.7'	70	3.2'	1.6'
20'	35	3.1'	3.1'	16'	9.2'	36	3.4'	2.9'	11'	11.0'	41	3.5'	2.4'	6'	10.4'	49	3.8'	1.9'
6'	89	3.2'	3.2'	5'	2.9'	83	3.7'	3.1'	3'	3.0'	126	3.5'	2.3'	2'	3.5'	100	5.5'	2.1'
8'	50	4.3'	4.3'	7'	4.0'	42	5.1'	4.3'	5'	5.0'	45	5.8'	3.8'	3'	5.2'	44	8.2'	3.2'
10'	32	5.4'	5.4'	9'	5.2'	26	6.6'	5.6'	7'	7.0'	23	8.1'	5.3'	4'	6.9'	25	10.9'	4.3'
12'	22	6.4'	6.4'	11'	6.4'	17	8.1'	6.8'	9'	9.0'	14	10.4'	6.8'	5'	8.7'	16	13.7'	5.4'
4'	125	2.9'	2.9'	3'	1.7'	144	3.0'	2.5'	3'	3.0'	79	5.0'	3.1'	1'	1.7'	250	4.8'	1.5'
6'	56	4.4'	4.4'	5'	2.9'	52	5.1'	4.2'	4'	4.0'	44	6.7'	4.1'	2'	3.5'	63	9.7'	2.9'
8'	31	5.8'	5.8'	7'	4.0'	27	7.1'	5.9'	5'	5.0'	28	8.4'	5.1'	3'	5.2'	28	14.5'	4.4'
10'	20	7.3'	7.3'	9'	5.2'	16	9.1'	7.6'	6'	6.0'	20	10.1'	6.1'	4'	6.9'	16	19.3'	5.8'

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®