



Page 1 of 1

PowerArc[™] Modular Metal Halide 20W, 39W, 70W T4 Enclosed Spot

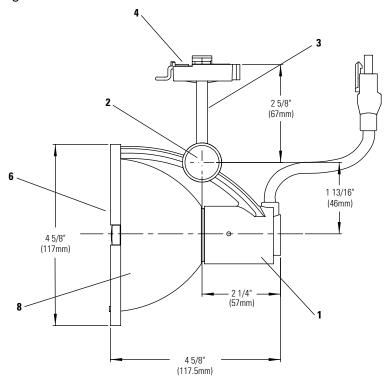

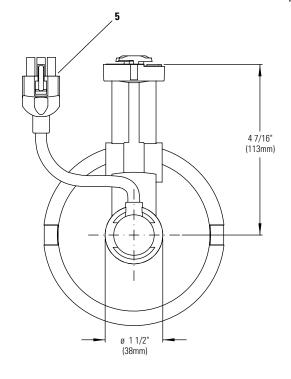

Ordering Information

Finishes	Track Mountings	Ballast Module	Lamp	Reflectors
Matte White	All Lytespan® Track systems and	Use one of:	T4 or T4.5 Single-Ended,	MHT4RS
Matte Black	Multipoint. All PowerArc™ Modular	83B20E	G8.5 Base, Clear Ceramic	MHT4RNF
Metallic Aluminum	ing brackets or pipe clamps. Not	83B39E 83B39M 83B70SE 83B70M	Metal Halide /UW Max.	MHT4RF
	compatible with ProSpec® or ATOM®.	83CY39E 83CY70E		
	Matte White	Matte White Matte Black Metallic Aluminum Matte Black Multipoint. All PowerArc™ Modular canopies, extension wands, mount- ing brackets or pipe clamps. Not	Matte White Matte Black Metallic Aluminum Metallic Aluminum Matte Black Multipoint. All PowerArc™ Modular canopies, extension wands, mounting brackets or pipe clamps. Not compatible with ProSpec® or ATOM®. Matte White Babes Use one of: 83B20E 83B39B 83B39M 83B70SE 83B70SE 83B70SE 83CY70E	Matte White All Lytespan® Track systems and Matte Black Multipoint. All PowerArc™ Modular Canopies, extension wands, mounting brackets or pipe clamps. Not compatible with ProSpec® or ATOM®. Matte White Use one of: 83B20E 83B39M 83B39M 83B70SE 83B70M 83CY39E 83CY70E

Features

- 1. Housing: Die cast aluminum body.
- 2. Vertical Pivot: 0-90° vertical adjustment.
- 3. Horizontal Pivot: Die cast track adapter with infinite rotation.
- 4. Track Attachment Fitting: Molded polycarbonate, rotates into track.
- 5. Power Connector: 5kv rated with insulated pins. Connects to ballast module. Keyed for polarity.
- 6. Safety Lens: Tempered 1/8" glass. Meets or exceeds U.L. safety requirement for metal halide lamps.
- 7. Reflector: (not shown) Interchangeable reflectors available to allow for desired precise beam spread without the need of additional lenses.
- 8. Shade: Die cast aluminum. Accepts Accessory Holder.

Reflectors sold separately. See MHT4R S/NF/F specification sheets.

Accessories

83T4AH Accessory Holder. Accepts 2 Accessories Max. 83T4S Snoot Accessory Holder. Accepts 2 Accessories Max. ADF3 (3 3/4" dia.) AF3 (3 3/4" dia.) Diffusion Filters **AL3HC** Hex Cell Louver (For use with 39W Max.) 83EW18WH, BK, AL 18" Extension Wand Compatible with 83EW48WH, BK, AL 48" Extension Wand 83B39LE, 83B70E and

83EC72WH, BK 6' Extension Cord 83PCWH, BK Pipe Clamp 83MPTWH, BK Mounting Bracket

magnetic ballasts only

Finish

All painted finishes are baked enamel.

Electrical

See ballast module spec sheet.

Labels

UL. cUL

Job Information	Туре:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte company www.lightolier.com 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. © 2006 Genlyte Group LLC • D1106