

### Ordering Information

Catalog No.	Finishes	Track Mountings	Lamps
9376WH	Matte White	Compatible with all Lytespan® Track Systems.	2 x 39w T5 High Output (Fluorescent)
9376BK	Matte Black		
9376AL	Metallic Aluminum	Not compatible with ProSpec Track, Clamp-On Monopoint, Slope Ceiling Adapter or Extension Wands.	1 x 39w T5 High Output (Fluorescent)
9377WH	Matte White		
9377BK	Matte Black		
9377AL	Metallic Aluminum		

### Features

- Ballast & Reflector Housing:** Aluminum with die-cast endcaps.
- Ballast:** 39W electronic.
- Flood Reflector:** Aluminum, with highly reflective and semispecular finish for a smooth wash of light.
- Louwer:** Aluminum, for glare control, with captive locking springs for easy installation and removal.
- Vertical Pivot:** Die cast rotation housing with positive rotation stop provides 0° (NADIR) –130° vertical rotation in both directions.
- Sockets:** 600v rated mini bi-pin sockets with 90° rotor lock to engage contacts and retain with a positive detent.
- Socket Bracket:** Adjustable steel, mounting bracket slides out for easy lamping.
- Attachment Fitting:** Molded polycarbonate; pin rotates fitting into track to engage luminaire
- Brass Contact:** Extends for connection to second circuit in Advent® Lytespan track.
- Track Adapter Arm:** Die-cast aluminum with integral polarity keyguard.

### Electrical

Rapid Start High Power Factor, Class P Electronic Ballast

**Power Factor:** >.97%

**Sound Rated:** A

**Minimum Start Temp:** 0°F

**Input Watts:** 9376 85W  
9377 43W

### Finish

All painted finishes are baked enamel.

### Labels


UL, c.U.L.

Advent® is a registered trademark of Lightolier.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	


Lightolier a Genlyte Thomas Company [www.lightolier.com](http://www.lightolier.com)  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • B0902

**LIGHTOLIER®**




## Lighting Data 2-39W T5 High Output

### Footcandles on wall:

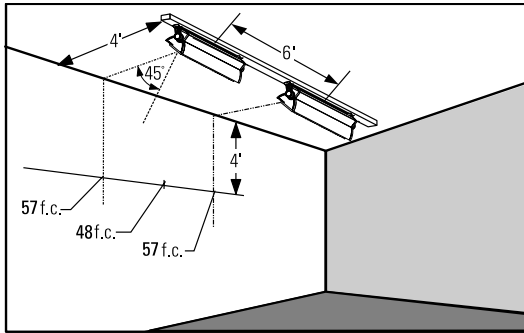

Lamp Information:  
 2 X 39W T5 High Output  
 Mini Bi-Pin Fluorescent (9376)  
 1 x 39W T5 High Output  
 Mini Bi Pin Fluorescent (9377)

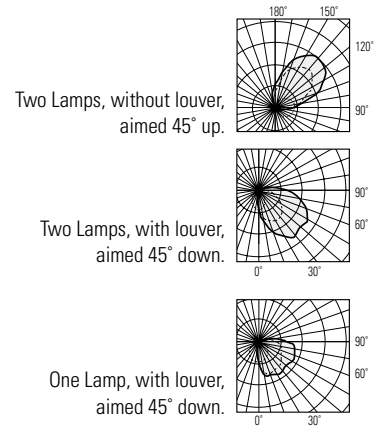

EXAMPLE: With track located 4' from wall and multiple units spaced 6' on center and aimed 45° from horizontal, the illumination on wall 4' from ceiling will be 57 f.c. beneath units and 48 f.c. between units.

### Footcandles on Wall

Track 3 Feet From Wall		Single Unit						Multiple Units								
		0'	1'	2'	3'	4'	5'									
Distance From Ceiling		Beam Center														
	1'	157	132	76	36	17	9	196	166	196	178	114	178	170	77	170
	2'	123	106	65	32	14	6	153	136	153	136	95	136	129	65	129
	3'	78	69	47	27	13	6	107	100	107	91	74	91	84	54	84
	4'	51	46	34	22	13	7	83	80	83	70	62	70	63	50	63
	5'	30	27	21	15	9	6	50	49	50	41	38	41	35	30	36
	6'	19	18	15	11	8	5	40	39	40	33	32	33	29	26	29
	7'	12	12	10	8	6	4	27	27	27	22	21	22	19	18	19
	8'	8	8	7	5	4	3	19	19	19	15	15	15	13	13	13
	9'	6	6	5	4	3	3	16	16	16	13	13	13	11	11	11

Track 4 Feet From Wall		Single Unit						Multiple Units								
		0'	1'	2'	3'	4'	5'									
Distance From Ceiling		Beam Center														
	1'	87	75	48	24	10	3	105	97	105	92	69	92	87	48	87
	2'	86	76	53	31	16	7	117	111	117	100	82	100	92	60	92
	3'	65	58	43	27	15	8	96	93	96	80	70	80	71	53	71
	4'	47	43	33	23	15	9	79	77	79	65	60	65	57	48	57
	5'	34	32	26	19	13	9	66	64	66	54	51	54	47	42	47
	6'	23	21	18	14	10	7	47	46	47	38	37	38	33	30	33
	7'	16	15	13	10	8	6	35	35	35	29	28	29	25	23	25
	8'	11	11	9	8	6	5	29	29	29	24	24	24	21	20	21
	9'	8	8	7	6	5	4	22	22	22	18	18	18	16	15	16

Track 5 Feet From Wall		Single Unit						Multiple Units								
		0'	1'	2'	3'	4'	5'									
Distance From Ceiling		Beam Center														
	1'	61	55	41	27	16	10	99	96	99	83	74	83	74	58	74
	2'	62	56	43	29	18	11	104	102	104	87	80	87	77	63	77
	3'	55	51	40	28	18	12	101	99	101	84	79	84	75	64	75
	4'	40	38	30	22	15	10	77	76	77	63	60	63	54	49	54
	5'	31	29	24	18	13	9	63	62	63	51	49	51	44	41	44
	6'	24	22	19	15	12	8	53	53	53	44	42	44	37	35	37
	7'	18	17	15	12	10	7	43	43	43	36	35	36	31	29	31
	8'	13	12	11	9	7	6	32	32	32	26	26	26	22	22	22
	9'	10	9	8	7	6	5	27	27	27	22	22	22	19	19	19

Footcandles are average and rounded off and data for multiple units are based on a minimum of five units.

**Job Information** **Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • B0902

**LIGHTOLIER®**