




Lytespan® Track Lighting System **MHT4RNF**

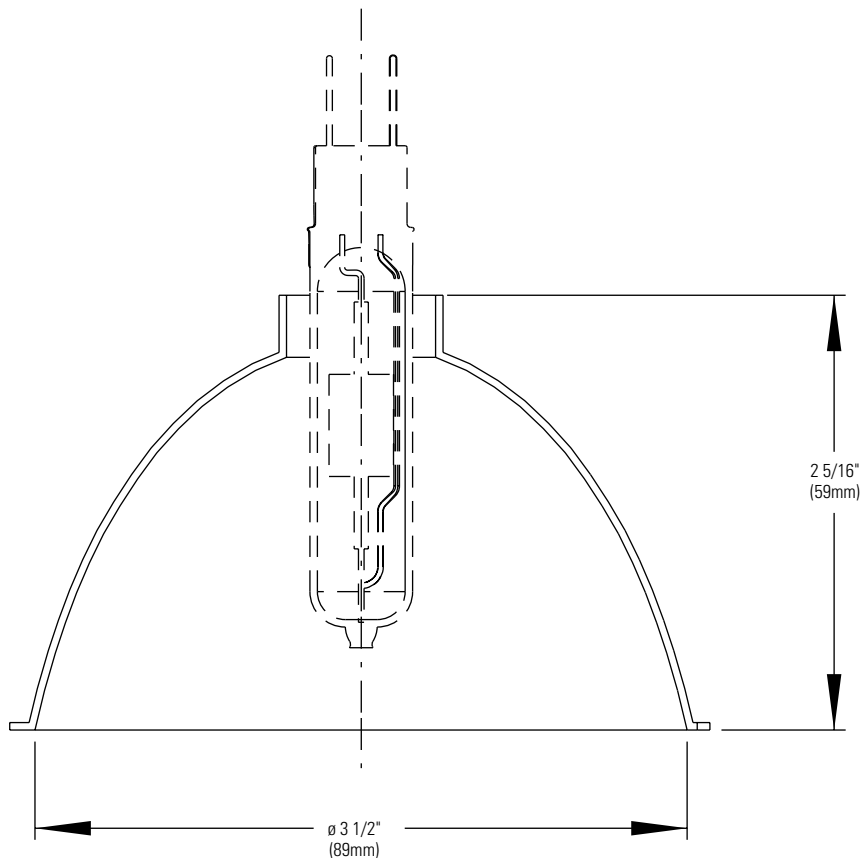

Ordering Information

Catalog No.	Finishes	Lamps	For Use With Luminaires
MHT4RNF	Anodized	T-4 Single Ended Ceramic Metal Halide	8304 and 8314

Features

- 1. **Narrow Flood Reflector:** Aluminum, split-faceted, specular, anodized and sealed.

Finish

Split Faceted, Specular Anodized and Sealed.

Labels

UL, cUL

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2003 Genlyte Thomas Group LLC (Lightolier Division) • A0403

LIGHTOLIER®



Lytespan® Track Lighting System **MHT4RNF**


AIMING ANGLE:

- L** Beam Length
- W** Beam Width
- C** Distance to center beam

- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

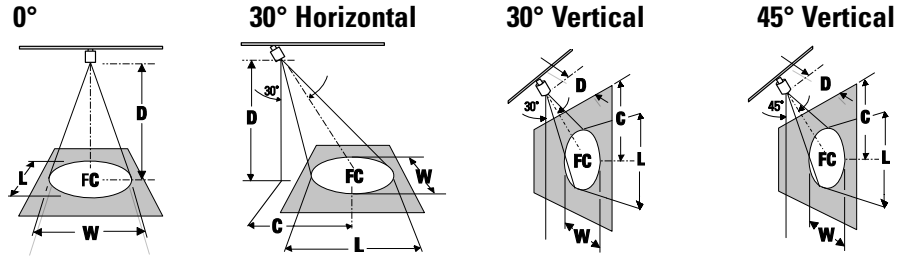

AIMING ANGLE:

	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° Horizontal Aiming				30° Horizontal Aiming					30° Vertical Aiming					45° Vertical Aiming																																																													
				D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W																																																									
20W T4 CMH		8,959	7,500 to 9,000	6'	248	1.9'	1.9'	6'	3.5'	162	2.6'	2.2'	3'	5.2'	124	4.1'	1.9'	3'	3.0'	352	1.9'	1.3'	8'	140	2.5'	2.5'	8'	4.6'	91	3.4'	2.9'	4'	6.9'	70	5.5'	2.5'	4'	4.0'	198	2.6'	1.8'	10'	90	3.2'	3.2'	10'	5.8'	58	4.3'	3.7'	5'	8.7'	45	6.9'	3.2'	5'	5.0'	127	3.2'	2.2'	12'	62	3.8'	3.8'	12'	6.9'	40	5.1'	4.4'	6'	10.4'	31	8.2'	3.8'	6'	6.0'	88	3.9'	2.7'
39W T4 CMH		14,208	9,000 to 10,000	6'	395	2.2'	2.2'	6'	3.5'	256	3.0'	2.6'	3'	5.2'	197	5.0'	2.2'	3'	3.0'	558	2.3'	1.6'	8'	222	3.0'	3.0'	8'	4.6'	144	4.0'	3.4'	4'	6.9'	111	6.6'	3.0'	4'	4.0'	314	3.1'	2.1'	10'	142	3.7'	3.7'	10'	5.8'	92	5.0'	4.3'	5'	8.7'	71	8.3'	3.7'	5'	5.0'	201	3.8'	2.6'	12'	99	4.4'	4.4'	12'	6.9'	64	6.0'	5.1'	6'	10.4'	49	9.9'	4.4'	6'	6.0'	140	4.6'	3.1'
70W T4 CMH		22,703	6,000 to 9,000	6'	631	2.4'	2.4'	6'	3.5'	410	3.3'	2.8'	3'	5.2'	315	5.6'	2.4'	3'	3.0'	802	2.5'	1.7'	8'	355	3.3'	3.3'	8'	4.6'	230	4.4'	3.8'	4'	6.9'	177	7.4'	3.3'	4'	4.0'	502	3.4'	2.3'	10'	227	4.1'	4.1'	10'	5.8'	147	5.5'	4.7'	5'	8.7'	114	9.3'	4.1'	5'	5.0'	321	4.2'	2.9'	12'	158	4.9'	4.9'	12'	6.9'	102	6.6'	5.6'	6'	10.4'	79	11.2'	4.9'	6'	6.0'	223	5.1'	3.5'

LIGHTOLIER®

Job Information Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2003 Genlyte Thomas Group LLC (Lightolier Division) • A0403