

### Ordering Information

Catalog No.	Finishes	Track Mounting	Lamp	Reflectors
DR2PS35WH DR2PS35BK DR2PS35SL	White Black Silver	Compatible with all ProSpec Track Systems	T6 Single Ended, G12 Base, Ceramic Metal Halide 39W	Use one of: DRT6RS DRT6RM DRT6RF

### Description

Remote controlled spotlight that can be mounted anywhere along the track and remotely aimed through the use of a hand-held controller. Can not be dimmed. Can not turn on/off using hand-held controller.

### Features

1. Full remote control of pan and tilt movement to aim at any object below the luminaire.
2. Positions can be recorded for future use.
3. Continuous movement and sequencing option.
4. Interchangeable Click-On™ reflectors to achieve desired beam spread. reflectors sold separately.
5. Die-cast aluminum housing.

### Electrical

Electronic Ballast

**Input Voltage:** 120V, 60 Hz

**Power Factor:** >95%

**Input Power:** 44W

**Max. Input Current:** .37A

**Total Harmonic Distortion:** <10%

**ANSI Code:** M130

Do not use on a dimming circuit.

### Labels

cULus Classified

### Job Information

### Type:

**Job Name:**

**Cat. No.:**

**Lamp(s):**

**Notes:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

www.lightolier.com © 2008 Philips Group • C1108

### AIMING ANGLE


- L** Beam Length
- W** Beam Width
- C** Distance to center beam
- D** Distance
- A** Aiming Angle
- FC** Footcandles

L and W are the outer points where the candle power drops to 50% of the maximum. FC are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.

#### Lamp Information:

39W T6 Clear Ceramic Metal Halide  
 Initial Lumens: 3300  
 CRI: 81  
 Rated Avg. Life: 9,000 to 12,000 hrs.

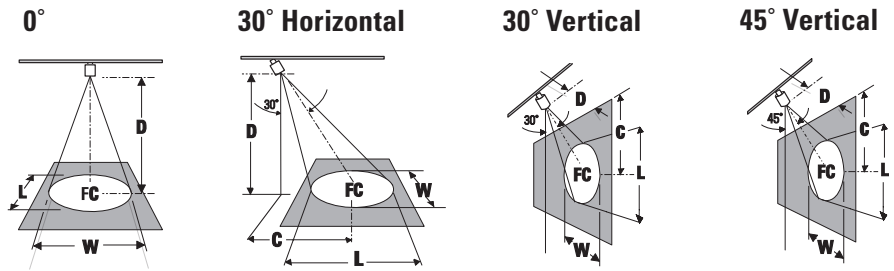

### AIMING ANGLE:

Beam Spread (To 50% CBCP)	CBCP	0° Horizontal Aiming				30° Horizontal Aiming				30° Vertical Aiming				45° Vertical Aiming						
		D	FC	L	W	D	C	FC	L	W	D	C	FC	L	W	D	C	FC	L	W
DRT6RS Spot Reflector  16° x 16°	11,108	8'	174	2.2'	2.2'	8'	4.6'	113	3.0'	2.6'	2'	3.5'	347	2.4'	1.1'	3'	3.0'	436	1.7'	1.2'
		10'	111	2.8'	2.8'	10'	5.8'	72	3.8'	3.2'	3'	5.2'	154	3.6'	1.7'	4'	4.0'	245	2.3'	1.6'
		12'	77	3.4'	3.4'	12'	6.9'	50	4.5'	3.9'	4'	6.9'	87	4.8'	2.2'	5'	5.0'	157	2.9'	2.0'
		14'	57	3.9'	3.9'	14'	8.1'	37	5.3'	4.5'	5'	8.7'	56	6.0'	2.8'	6'	6.0'	109	3.4'	2.4'
DRT6RM Med Flood Reflector  24° x 24°	7,712	6'	214	2.6'	2.6'	6'	3.5'	139	3.5'	2.9'	2'	3.5'	241	3.9'	1.7'	3'	3.0'	306	2.7'	1.8'
		8'	121	3.4'	3.4'	8'	4.6'	78	4.6'	3.9'	3'	5.2'	107	5.9'	2.6'	4'	4.0'	172	3.6'	2.4'
		10'	77	4.3'	4.3'	10'	5.8'	50	5.8'	4.9'	4'	6.9'	60	7.9'	3.4'	5'	5.0'	110	4.5'	3.0'
		12'	54	5.1'	5.1'	12'	6.9'	35	6.9'	5.9'	5'	8.7'	39	9.8'	4.3'	6'	6.0'	76	5.3'	3.6'
DRT6RF Flood Reflector  38° x 38°	7,779	6'	216	3.9'	3.9'	8'	4.6'	79	7.2'	6.0'	2'	3.5'	243	7.6'	2.6'	3'	3.0'	306	4.4'	2.8'
		8'	122	5.2'	5.2'	10'	5.8'	51	9.0'	7.5'	3'	5.2'	108	11.4'	3.9'	4'	4.0'	172	5.8'	3.7'
		10'	78	6.5'	6.5'	12'	6.9'	35	10.8'	9.0'	4'	6.9'	61	15.2'	5.2'	5'	5.0'	110	7.3'	4.6'
		12'	54	7.8'	7.8'	14'	8.1'	26	12.6'	10.5'	5'	8.7'	39	19.0'	6.5'	6'	6.0'	76	8.7'	5.5'

<b>Job Information</b>	<b>Type:</b>
------------------------	--------------

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • C1108