

SC Cleanlite Enclosed Industrial Fluorescent **SC4WC232**

Page 1 of 2

Wet Locations, 1 or 2 Lamp T8

Features


- UL-Listed for wet locations.
- Silicone sealed body.
- For industrial or commercial applications.
- Crisp modular design.
- Available in 4' one piece body.
- Continuous closed-cell gasketing at all seal points.
- Smooth one-piece water-clear acrylic lens.
- Lock-tight cam-action latches.
- Water-tight hubs for electrical feed.
- Construction meets NYC Code requirements.




Mounting Methods



fully enclosed and gasketed



heavy-duty cam-action latches






crisp modular profile



water-tight hubs

Dimensions

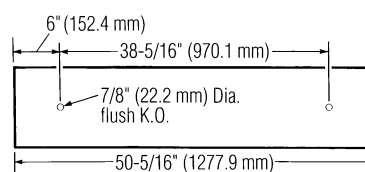

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

Lightolier a Genlyte Thomas Company www.lightolier.com
Technical Information: (978) 657-7600 • Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
Copyright 2002 Lightolier **Section 7/Folio Q30-22 Rev. B**

LIGHTOLIER®




SC Cleanlite Enclosed Industrial Fluorescent **SC4WC232**

Page 2 of 2

Wet Locations, 1 or 2 Lamp T8

Photometry

Model No. SC4WC232120S0

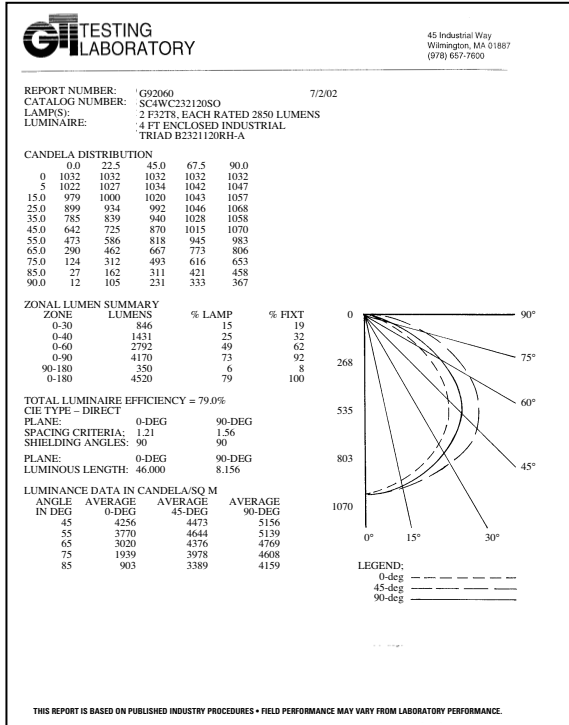

coefficients of utilization — zonal cavity method

RF	20			20			20		
RC	80			50			30		
RW	70	50	30	50	30	10	50	30	10
room cavity ratio	1	80	75	71	71	68	65	67	64
	2	71	64	58	60	56	51	57	53
	3	64	56	49	52	47	42	49	44
	4	58	49	42	46	40	35	43	38
	5	53	43	36	41	34	30	39	33
	6	49	39	31	37	30	26	35	29
	7	45	35	28	33	27	22	31	26
	8	42	32	25	30	24	20	29	23
	9	39	29	22	28	22	18	26	21
	10	37	27	20	25	20	16	24	19

Ordering Information

Explanation of Catalog Number. Example: SC4WC232120S0TP†

SC	4	W	C		32			
Cleanlite: Industrial Fluorescent for Wet Locations	Fixture Length 4 = 4' Length	Location: W = Wet Locations	Lens: C = Clear Lens	Number of Lamps in Width: 1 or 2 Lamps	Lamp/Watts (By others) 32 = 32w T8 (Nominal 48")	Voltage: 120 or 277	Ballast: 1 & 2 Lamp Elec. (T8) *Instant Start Standard	Options: Add appropriate suffix to catalog no, ie: (TP)

†No Product Change. New Catalog Number Designation.

Options/Accessories

Tamperproof Latches: Suffix: TP

Optional Lenses: Lexan lenses or DR acrylic lens. Consult factory.

Water Tight Kits: All fixtures are furnished with one watertight hub kit for top or end conduit entry. Additional water tight kits required for every entry. Catalog Number: **GWHB CSP**. For coupling kits required for continuous row mounting. Catalog Number: **KWCP CSP**

Specifications

Materials: Chassis shall be 20 gauge steel.

Wireway Cover: Full length retained by fasteners for quick removal and convenient servicing.

Lens: One-piece flanged lens enclosure molded from .125" thick smooth water-clear virgin acrylic. Lens enclosure shall be heavy-duty vapor tight enclosed and gasketed with closed-cell foam gasketing (permanently attached to fixture housing).


Latches: Lock-tight cam action.

Finish: Chassis shall be phosphate primed and finished in baked white acrylic enamel for not less than 86% reflectivity.


Electrical: Thermally protected class "P" ballast C.B.M. approved, non PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90°.

Labels: I.B.E.W./UL and ULc Listed.

WATER TIGHT HUB KIT Cat. No. GWHB CSP



COUPLING KIT Cat. No. KWCP CSP

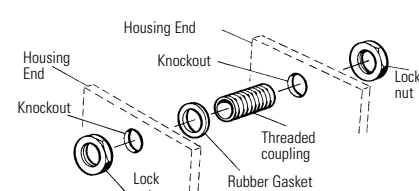

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
Technical Information: (978) 657-7600 • Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
Copyright 2002 Lightolier **Section7/Folio Q30-22 REV. B**

LIGHTOLIER