

Ordering Guide (complete unit only)

Cat. No.	Lamp (circular)	Volt	Finish
SL202BF4U	4-18W QT	120/277V	Anodized Aluminum & Sand Blasted Glass
SL202BQDU	4-18W QT	120/277V	Anodized Aluminum & Sand Blasted Glass

Features

- Form:** Round form fabricated from slitted corrugated anodized aluminum. Slits hold the sand blasted glass and reflector element. The illuminated edge of the glass is visible through the corrugations.
- Glass:** Center sand blasted glass with clear outer ring. Image of lamps seen through the glass to create a geometric pattern on the wall or ceiling.
- Housing:** Spun painted steel construction. Mounting plate houses the ballast and lamp sockets.

Mounting

Mounting: Surface mounting to wall or ceiling surfaces.

Lamp Change: Fluted housing simply twists-off. Held in place by 3 locking pins.

Luminaire Weight: 10.5 lbs.

Electrical

Ballast: Electronic T4 quad lamp ballasts. Universal voltage "U" ballast automatically detect 120 volts or 277 volts operation.

F4: Programmed Rapid Start by Universal

QD: High-Performance dimming by Lightolier-Controls

Lampholder: G24q-2 base, 4 Pin.

Options and Accessories

DS: Double switching.
Consult your Lightolier representative for more information.

Perforated form: Consult your Lightolier representative for more information.


Finish

Anodized corrugated aluminum sheet with precise flutes.
All painted parts are with powder coat paint process.

Labels

UL "c/us" Listed. Suitable for damp locations.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

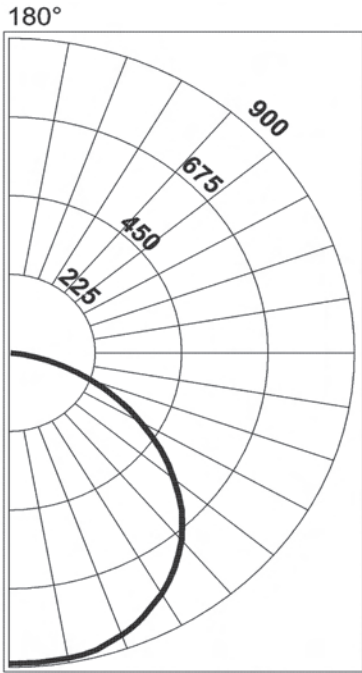

CANDLEPOWER

ZONE →	0
DEG ↓	
0	889
5	889
10	887
15	880
20	859
25	831
30	796
35	752
40	700
45	637
50	560
55	483
60	396
65	312
70	227
75	145
80	70
85	18
90	2

0° **REPORT NO: SL202AQUU**
CAT. NO: C8744.IES
 4 x 26W QT at 1825 lumens
 Efficiency: 36%. Maimum candela: 81
 Peak at 5°

COEFFICIENTS OF UTILIZATION

ZONAL CAVITY METHOD □ EFFECTIVE FLOOR CAVITY REFLECTANCE = .20

ROOM CAVITY RATIO	Wall Reflectance																				
	80				70				50				30				10				0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
0	.42	.42	.42	.42	.41	.41	.41	.41	.39	.39	.39	.38	.38	.38	.36	.36	.36	.36			
1	.39	.38	.36	.35	.38	.37	.36	.34	.35	.34	.33	.34	.33	.32	.33	.32	.31	.31			
2	.36	.33	.31	.29	.35	.33	.31	.29	.31	.30	.28	.30	.29	.28	.29	.28	.27	.26			
3	.33	.29	.27	.25	.32	.29	.26	.25	.28	.26	.24	.27	.25	.24	.26	.25	.23	.23			
4	.30	.26	.24	.21	.30	.26	.23	.21	.25	.23	.21	.24	.22	.21	.24	.22	.20	.20			
5	.28	.24	.21	.18	.27	.23	.20	.18	.22	.20	.18	.22	.20	.18	.21	.19	.18	.17			
6	.26	.21	.18	.16	.25	.21	.18	.16	.20	.18	.16	.20	.17	.16	.19	.17	.15	.15			
7	.24	.19	.16	.14	.23	.19	.16	.14	.18	.15	.14	.18	.15	.13	.17	.15	.13	.13			
8	.22	.17	.14	.12	.21	.17	.14	.12	.16	.14	.12	.16	.14	.12	.16	.13	.12	.11			
9	.20	.16	.13	.11	.20	.15	.13	.11	.15	.12	.11	.15	.12	.10	.14	.12	.10	.10			
10	.19	.14	.11	.09	.10	.14	.11	.09	.14	.11	.09	.13	.11	.09	.13	.11	.09	.09			

DETERMINED IN ACCORDANCE WITH CURRENT IES PUBLISHED PROCEDURES
 LUMINAIRE INPUTS WATTS = 88.7

DISTRIBUTION

Zone	Lumens	% Lamp	% Luminaire
0-30	716	10	28
0-40	1185	16	46
0-60	2102	29	81
0-90	2593	36	100
40-90	1408	19	54
60-90	491	7	19
90-180	0	0	0
0-180	2593	36	100

Job Information

Type:

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2005 Genlyte Group LLC • B0605