

## LUMIÈRE®



## CARMEL 450

70W (max)  
T6 Metal Halide

## FEATURES

- Use with or without optional mounting arms
- 200° tilt, 360° rotation
- Die-cast housing, machined stem
- Stainless steel hardware
- S.P.S. Siphon Protection System
- UL / cUL listed
- Three (3) year warranty



## Arm-Mounting Options



Straight Arm - See Options



Hook Arm - See Options

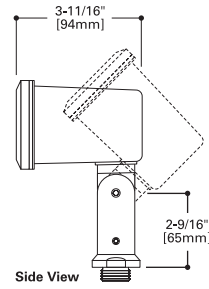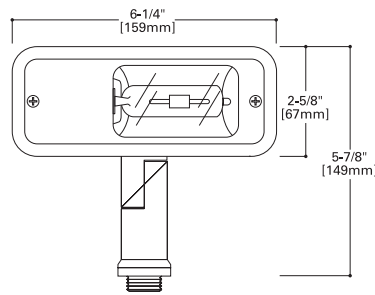

SAMPLE NUMBER: 450-MH70T6-120-MB-BK-HA24

MODEL	SOURCE	VOLTS	BALLAST/ MOUNTING	FINISH	OPTIONS	
450	Mini-flood with 1/2" NPS adjustable stem	<i>Metal Halide</i> <b>MH39T6</b> 39W / T6 / G12 <b>MH70T6</b> 70W / T6 / G12 <i>Lamp not included</i>	<b>120</b> <b>208</b> <b>240</b> <b>277</b> <b>347</b>	<b>MB</b> Fixture mounts to inground core & coil ballast/housing <b>MBR</b> Fixture mounts to flat surface (any orientation), remote inground core & coil ballast/housing <b>SM</b> Fixture mounts to wall-mounted core & coil ballast/housing, bottom conduit entry <b>WM</b> Fixture mounts to wall-mounted core & coil ballast/housing, over J-box <b>WR</b> Fixture mounts to flat surface (any orientation), remote core & coil ballast/housing <b>TS</b> Fixture mounts to core & coil ballast, strapped to tree <b>TSR</b> Fixture strapped to tree, remote inground core & coil ballast/housing	<i>Painted</i> <b>BK</b> Black <b>BZ</b> Bronze <b>CS</b> City silver <b>VE</b> Verde <b>WT</b> White	<i>For MBR, WM or WR ballast/mounting only</i> <b>HA24</b> 24" hook arm <b>HA30</b> 30" hook arm <b>HA36</b> 36" hook arm <b>SA24</b> 24" straight arm <b>SA30</b> 30" straight arm <b>SA36</b> 36" straight arm

Note: Add prefix "EL" to Ballast/Mounting code to specify electronic ballast in lieu of core and coil.