




ASSEMBLY INSTRUCTIONS FOR 29276-13&29276-17

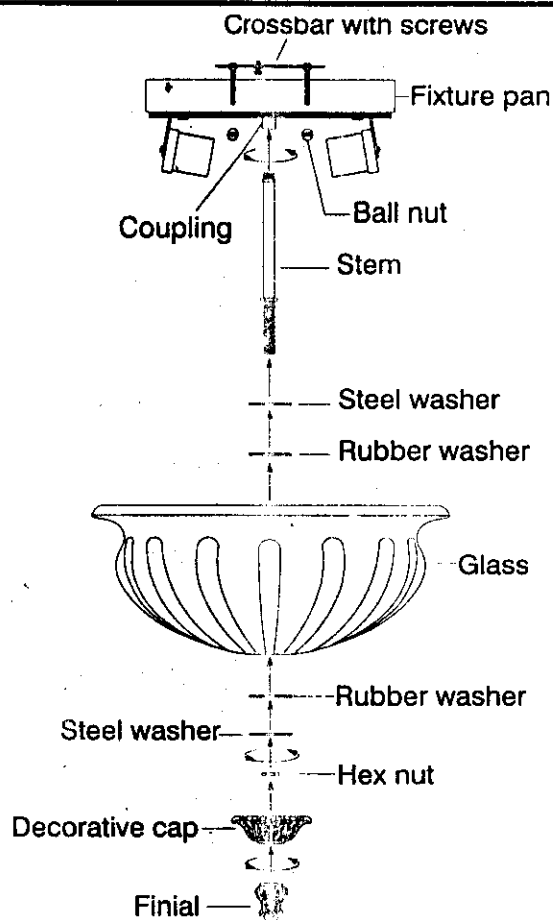

1. With power to the installation point OFF, attach the crossbar with (2) mounting screws to ceiling mounted outlet box with (2) outlet box screws.
2. Make wire connections: (We recommend 2 people for this step). Position the fixture under the outlet box. Attach house ground wire to fixture ground wire. Proceed to attach both to the crossbar using ground screw. Using wire connectors connect the house white wire to the fixture supply wire (ribbed side); Connect the house black (or red) wire to the fixture supply wire (smooth side). Wrap all connections with approved electrical tape.
3. With the connections properly made, push all wires connections into the outlet box. Align and pass the (2) mounting screws attached to crossbar through (2) mounting holes in fixture pan. Locate (2) ball nuts and thread onto ends of mounting screws. Hands tighten until snug to secure fixture to ceiling. Be sure there are no trapped or pinched wires.
4. Install the top end of stem into the coupling at the bottom center of fixture pan. Hands tighten until snug.
5. Install proper bulbs (not provided) to each socket referring to the markings and labels on fixture for maximum wattage.
6. Locate steel washer, rubber washer and glass, pass their center hole through the bottom end of stem and secure with hex nut as shown in the illustrator. Carefully place the center holes of decorative cap over the protruding stem from glass and secure with finial. Hands tighten until snug.
7. Restore power to the installation point ON. Retain this sheet for future reference.

IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN!