

9231

**Analog Video Distribution Amplifier w/ Differential Input,
Clamping and Cable Equalization**

Owner's Manual



Cobalt Part Number: 9231
v.1.2



9231 • Analog Video Distribution Amplifier w/ Loop Output

Cobalt Digital Part Number: 9231

- V.1.2
- Printed in the USA.

The information contained in this Owner's Manual is subject to change without notice or obligation.

Copyright

© 2012 Cobalt Digital Inc. All rights reserved.

Contents of this publication may not be reproduced in any form without the written permission of Cobalt Digital Inc. Reproduction or reverse engineering of copyrighted software is prohibited.

Notice

The material in this manual is furnished for informational use only. It is subject to change without notice and should not be construed as a commitment by Cobalt Digital Inc. Cobalt Digital Inc. assumes no responsibility or liability for errors or inaccuracies that may appear in this manual.

Trademarks

-  is a registered trademark of Ross Video Limited.



-  is a registered trademark of Cobalt Digital Inc.
- All other product names and any registered and unregistered trademarks mentioned in this manual are used for identification purposes only and remain the exclusive property of their respective owners.

Important Regulatory and Safety Notices

Before using this product and any associated equipment, refer to the “Important Safety Instructions” listed below so as to avoid personnel injury and to prevent product damage.

Products may require specific equipment, and /or installation procedures be carried out to satisfy certain regulatory compliance requirements. Notices have been included in this publication to call attention to these Specific requirements.

Symbol Meanings



This symbol on the equipment refers you to important operating and maintenance (servicing) instructions within the Product Manual Documentation. Failure to heed this information may present a major risk of damage or injury to persons or equipment.



Warning

The symbol with the word “**Warning**” within the equipment manual indicates a potentially hazardous situation, which if not avoided, could result in death or serious injury.



Caution

The symbol with the word “**Caution**” within the equipment manual indicates a potentially hazardous situation, which if not avoided, may result in minor or moderate injury. It may also be used to alert against unsafe practices.



Notice

The symbol with the word “**Notice**” within the equipment manual indicates a situation, which if not avoided, may result in major or minor equipment damage or a situation which could place the equipment in a non-compliant operating state.



**ESD
Susceptibility**

This symbol is used to alert the user that an electrical or electronic device or assembly is susceptible to damage from an ESD event.

Important Safety Instructions



Caution

This product is intended to be a component product of the openGear® 8320 series (or equivalent) frame. Refer to the frame User Manual for important safety instructions regarding the proper installation and safe operation of the frame as well as it’s component products.



Warning

Certain parts of this equipment namely the power supply area still present a safety hazard, with the power switch in the OFF position. To avoid electrical shock, disconnect all A/C power cords from the chassis’ rear appliance connectors before servicing this area.



Warning

Service barriers within this product are intended to protect the operator and service personnel from hazardous voltages. For continued safety, replace all barriers after any servicing.

This product contains safety critical parts, which if incorrectly replaced may present a risk of fire or electrical shock. Components contained within the product’s power supplies and power supply area, are not intended to be customer serviced and should be returned to the factory for repair.

To reduce the risk of fire, replacement fuses must be the same type and rating.

Only use attachments/accessories specified by the manufacturer.

EMC Notices

US FCC Part 15

This equipment has been tested and found to comply with the limits for a class A Digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case users will be required to correct the interference at their own expense.



Notice

Changes or modifications to this equipment not expressly approved by Cobalt Digital Inc. could void the user's authority to operate this equipment.

CANADA

This Class "A" digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de classe "A" est conforme à la norme NMB-003 du Canada.

EUROPE

This equipment is in compliance with the essential requirements and other relevant provisions of **CE Directive 93/68/EEC**.

INTERNATIONAL

This equipment has been tested to **CISPR 22:1997** along with amendments **A1:2000** and **A2:2002** and found to comply with the limits for a Class A Digital device.



Notice

This is a Class A product. In domestic environments this product may cause radio interference in which case the user may have to take adequate measures.

Maintenance/User Serviceable Parts

Routine maintenance to this product is not required. This product contains no user serviceable parts. If the module does not appear to be working properly, please contact Technical Support using the numbers listed under the "Contact Us" section on the last page of this manual. See the "Warranty and Repair Policy" section in this manual for details.

Environmental Information

The equipment that you purchased required the extraction and use of natural resources for its production. It may contain hazardous substances that could impact health and the environment.

To avoid the potential release of those substances into the environment and to diminish the need for the extraction of natural resources, Cobalt Digital Inc. encourages you to use the appropriate take-back systems. These systems will reuse or recycle most of the materials from your end-of-life equipment in an environmentally friendly and health conscious manner.

The crossed-out wheeled bin symbol invites you to use these systems.



If you need more information on the collection, reuse, and recycling systems, please contact your local or regional waste administration.

Introduction

This chapter contains the following sections:

- Overview
- Functional Block Diagram
- Features
- Documentation Terms

Overview

The 9231 is an analog video distribution amplifier with a differential input designed for broadcast use. It has one input and can provide up to eight outputs. The 9231 can be addressed through Dashboard to report card status and activate features.

Functional Block Diagram

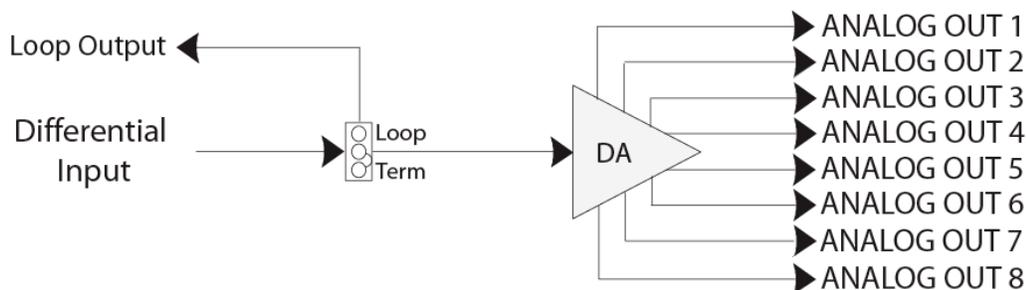


Figure 1. Simplified Block Diagram of the 9231 Functions

Features

The following features make the 9231 the best solution for analog video distribution.

- Equipped with a differential input
- Offers input clamping
- Has a +/- 3 dB trim range to match levels
- Handles NTSC or PAL composite signals
- 5 year warranty
- Fits openGear® 8320 series (or equivalent) 20-slot frames

Documentation Terms

The following terms are used throughout this guide:

- **“Frame”** refers to the 20-slot frame that houses the **9231** card.
- **“Operator”** and **“User”** refer to the person who uses the **9231**.
- **“Board”**, and **“Card”** refer to the **9231** card itself, including all components and switches.

Installation and Setup

This chapter contains the following sections:

- Static Discharge
- Unpacking
- Rear Module Options
- Board Installation

Static Discharge

Whenever handling the 9231 and other related equipment, please observe all static discharge precautions as described in the following note:




ESD
Susceptibility

Static discharge can cause serious damage to sensitive semiconductor devices. Avoid handling circuit boards in high static environments such as carpeted areas, and when wearing synthetic fiber clothing. Always exercise proper grounding precautions when working on circuit boards and related equipment.


Unpacking

Unpack each 9231 you received from the shipping container, and check the contents against the packing list to ensure that all items are included. If any items are missing or damaged, contact your sales representative or Cobalt Digital Inc. directly.


Rear Module Options

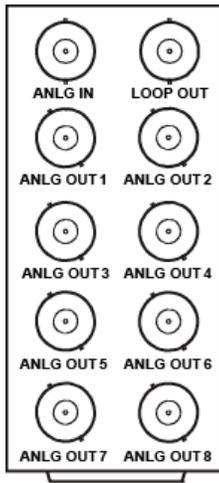

RM20-9231-B

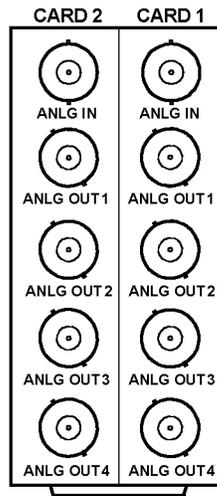

RM20-9231-A/S

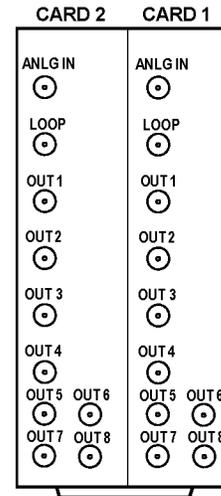

RM20-9231-B/S

Figure 2. 9231 Rear Modules

Board Installation

Use the following procedure to install the 9231 in a 20-slot frame.

1. Refer to the User Manual of the frame to ensure that the frame is properly installed according to instructions.
2. After selecting the desired frame installation slot, hold the 9231 card by the edges and carefully align the card edges with the slots in the frame. Then fully insert the card into the frame until the rear connection plugs are properly seated on the midplane and rear module.

This completes the procedure for installing the 9231 in a frame.

User Controls

This chapter contains a description of the 9231 user controls:

- LEVEL CONTROLS
- LEDs
- Jumper Settings
- Remote Control

User Controls

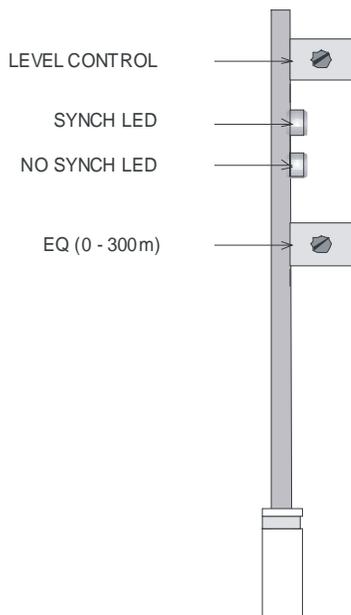


Figure 3. Card-edge User Controls

Level

The level control is used to adjust the output levels of the 9231. This potentiometer gives precise control of the output signal over a +/-3 dB range

EQ(0 – 300m)

Provides continuously variable equalization for cable lengths from 0 to 300 metres.

LEDs

The front-edge of the card features LEDs that display the status of the input signals. Descriptions are provided in the following table:

LED	Color	Location	Display and Description
SYNCH	Green	Top of the card	When illuminated there is a valid analog signal at the input.
NO SYNCH	Green	Second from the top	When illuminated there is not a valid analog signal at the input.

Table 1. Status LED Descriptions

Jumper Settings

TERM
HI Z



Selects the input termination, either high impedance or 75 Ohms.

BAL



Selects between a balanced and differential input configuration.

ON  OFF
CLAMP

Turns clamping circuit on or off.

REMOTE CONTROL

DashBoard Control

This card may be monitored by a remote computer through DashBoard the free configuration monitoring software..

With DashBoard installed on your computer the following menus are available when interrogating an 9231 card:

MENU	ITEM	DISPLAY	DESCRIPTION
Card Info (Read Only)	Product	9231	Product identification code
	Name	Analog Video Distribution Amplifier	Product functional description
	Supplier	Cobalt Digital Inc.	Manufacturer of the card
	Software Rev.	##	Two digit software revision code
	Web site	www.cobaltdigital.com	Manufacturer's web address

MENU	ITEM	DISPLAY	DESCRIPTION
Card Status (Read Only)	Card Status	Green Dot – Synch detected	Card is functioning properly and appropriate signals are connected
		Red Dot – No synch detected	Video signal is not present

Specifications

Technical Specifications

INPUT

Input Impedance (1)	75 Ohm Or Hi-Z
Input Level	1Vp-p, nominal
Input Return Loss	46dB Typical, @ 3.58M

PERFORMANCE

Response	better than 0.05 dB @ 3.58M
Differential Gain	better than 0.15% @ 3.58M
Differential phase	better than 0.15 deg @ 3.58M
S\N	better than 60dB, 5MHz B.W.

OUTPUT

Output Impedance(8 splits)	75 Ohm
Output level	1Vp-p, terminated

GENERAL

Power Requirements	+12 V,120 mA, -7,5V, 55mA
Dimensions	3.025" high x 12.800" deep
Weight	approx.0.115 kg (0.252 lbs)

Cobalt Digital Inc. reserves the right to change performance specifications without prior notice.

Warranty and Repair Policy

This product is warranted to be free from defects in material and workmanship for a period of five (5) years from the date of shipment to the original purchaser, except that 4000, 5000, 6000, 8000 series power supplies, and Dolby® modules (where applicable) are warranted to be free from defects in material and workmanship for a period of one (1) year.

Cobalt Digital Inc.'s ("Cobalt") sole obligation under this warranty shall be limited to, at its option, (i) the repair or (ii) replacement of the product, and the determination of whether a defect is covered under this limited warranty shall be made at the sole discretion of Cobalt.

This limited warranty applies only to the original end-purchaser of the product, and is not assignable or transferrable therefrom. This warranty is limited to defects in material and workmanship, and shall not apply to acts of God, accidents, or negligence on behalf of the purchaser, and shall be voided upon the misuse, abuse, alteration, or modification of the product. Only Cobalt authorized factory representatives are authorized to make repairs to the product, and any unauthorized attempt to repair this product shall immediately void the warranty. Please contact Cobalt Technical Support for more information.

To facilitate the resolution of warranty related issues, Cobalt recommends registering the product by completing and returning a product registration form. In the event of a warrantable defect, the purchaser shall notify Cobalt with a description of the problem, and Cobalt shall provide the purchaser with a Return Material Authorization ("RMA"). For return, defective products should be double boxed, and sufficiently protected, in the original packaging, or equivalent, and shipped to the Cobalt Factory Service Center, postage prepaid and insured for the purchase price. The purchaser should include the RMA number, description of the problem encountered, date purchased, name of dealer purchased from, and serial number with the shipment.

Cobalt Digital Inc. Factory Service Center

2406 E. University Avenue

Office: (217) 344-1243

Urbana, IL 61802 USA

Fax: (217) 344-1245

www.cobaltdigital.com

Email: info@cobaltdigital.com

THIS LIMITED WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND OF ALL OTHER OBLIGATIONS OR LIABILITIES ON COBALT'S PART. ANY SOFTWARE PROVIDED WITH, OR FOR USE WITH, THE PRODUCT IS PROVIDED "AS IS." THE BUYER OF THE PRODUCT ACKNOWLEDGES THAT NO OTHER REPRESENTATIONS WERE MADE OR RELIED UPON WITH RESPECT TO THE QUALITY AND FUNCTION OF THE GOODS HEREIN SOLD. COBALT PRODUCTS ARE NOT AUTHORIZED FOR USE IN LIFE SUPPORT APPLICATIONS.

COBALT'S LIABILITY, WHETHER IN CONTRACT, TORT, WARRANTY, OR OTHERWISE, IS LIMITED TO THE REPAIR OR REPLACEMENT, AT ITS OPTION, OF ANY DEFECTIVE PRODUCT, AND SHALL IN NO EVENT INCLUDE SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING LOST PROFITS), EVEN IF IT HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Ordering Information

Standard Equipment

- **9231** Analog Video Distribution Amplifier w/Differential Input, Clamping and Cable Equalization

Optional Equipment

- **9231-OM** Universal Analog Audio Distribution Amplifier Owner's Manual (additional Owner's Manual)
- **RM20-9231-B Rear Module** (20-slot Frame Rear I/O Module (Standard Width) 1 Video Input BNC, 1 Looped Video Output BNC, 8 Video Output BNCs)
- **RM20-9231-A/S Rear Module** (20-slot Frame Rear I/O Module (Split) 1 Video Input BNC, 4 Video Output BNCs per card)
- **RM20-9231-B/S-HDBNC Rear Module** (20-slot Frame Rear I/O Module (Split) 1 Video Input HDBNC, 1 Looped Video Output HDBNC, 8 Video Outputs HDBNCs per card)
- **RM20-9231-B/S-DIN Rear Module** (20-slot Frame Rear I/O Module (Split) 1 Video Input, 1 Looped Video Output, 8 Video Outputs per card. All connectors DIN 1.0/2.3)

Your **9231** Distribution Amplifier is a part of the openGear® family of products. Cobalt Digital offers a full line of openGear® terminal equipment including distribution, conversion, monitoring, muxing, demuxing and processing of AES/EBU and HD/SD-SDI as well as analog audio and video products.

Contact Us

Contact our friendly and professional support representatives for the following:

- Name and address of your local dealer
- Product information and pricing
- Technical support
- Upcoming trade show information

PHONE	General Business Office and Technical Support	217 • 344 • 1243
	Fax	217 • 344 • 1245
E-MAIL	General Information	sales@cobaltdigital.com
	Technical Support	support@cobaltdigital.com
POSTAL SERVICE	Cobalt Digital Inc.	2406 E. University Ave. Urbana, IL 61802

Visit Us

Please visit us at our website for:

- Company information
- Related products and full product lines
- On-line catalog
- Trade show information
- News

www.cobaltdigital.com