

DELTA 10 R ZOOM



DELTA 10 R ZOOM RGBW FAR

(Cod. 03.LDR004.TF)

• Electronic Power Supply • Motorized Zoom • FAR system

DELTA 10 R ZOOM RGBW

(Cod. 03.LDR004.T)

• Electronic Power Supply • Motorized Zoom

User's Manual Rel 1.1 **GB**

D.T.S. Illuminazione srl - ITALY
<http://www.dts-lighting.it>



The Lighting Company

Made in Italy

Le informazioni contenute in questo documento sono state attentamente redatte e controllate. Tuttavia non è assunta alcuna responsabilità per eventuali inesattezze. Tutti i diritti sono riservati e questo documento non può essere copiato, fotocopiato, riprodotto per intero o in parte senza previo consenso scritto della D.T.S .

D.T.S si riserva il diritto di apportare senza preavviso cambiamenti e modifiche estetiche , funzionali o di design a ciascun proprio prodotto. D.T.S non assume alcuna responsabilità sull'uso o sull'applicazione dei prodotti o dei circuiti descritti.

The information contained in this publication has been carefully prepared and checked. However, no responsibility will be taken for any errors. All rights are reserved and this document cannot be copied, photocopied or reproduced, in part or completely, without prior written consent from D.T.S. D.T.S. reserves the right to make any aesthetic, functional or design modifications to any of its products without prior notice. D.T.S. assumes no responsibility for the use or application of the products or circuits described herein.

Les informations contenues dans le présent manuel ont été rédigées et contrôlées avec le plus grand soin. Nous déclinons toutefois toute responsabilité en cas d'éventuelles inexactitudes. Tous droits réservés. Ce document ne peut être copié, photocopié ou reproduit, dans sa totalité ou partiellement, sans le consentement préalable de D.T.S.

D.T.S. se réserve le droit d'apporter toutes modifications et améliorations esthétiques, fonctionnelles ou de design, sans préavis, à chacun de ses produits. D.T.S. décline toute responsabilité sur l'utilisation ou sur l'application des produits ou des circuits décrits.

Las informaciones contenidas en este documento han sido cuidadosamente redactadas y controladas. Con todo, no se asume ninguna responsabilidad por eventuales inexactitudes. Todos los derechos han sido reservados y este documento no puede ser copiado, fotocopiado o reproducido, total o parcialmente, sin previa autorización escrita de D.T.S.

D.T.S. se reserva el derecho a aportar sin previo aviso cambios y modificaciones de carácter estético, funcional o de diseño a cada producto suyo. D.T.S. no se asume responsabilidad de ningún tipo sobre la utilización o sobre la aplicación de los productos o de los circuitos descritos.

INDEX:


1- SYMBOLS	4
2- GENERAL WARNING	4
3- GENERAL WARRANTY CONDITION	4
4- TECHNICAL FEATURES	5
5- ACCESSORIES	7
6- IMPORTANT SAFETY INFORMATION	8
6.1 Fire prevention	
6.2 Prevention of electric shock	
6.3 Safety	
6.4 Level of protection against the penetration of solid and liquid objects	
7- VOLTAGE AND FREQUENCY	9
8- INSTALLATION	9
8.1 Safety cable	
8.2 Protection against liquids	
8.3 Movement	
8.4 Risk of fire	
8.5 Forced ventilation	
8.6 Ambient temperature	
9- MAINS CONNECTION	10
9.1 Protection	
10- DMX SIGNAL CONNECTION	11
10.1 DMX Addresses	
10.2 Selecting the DMX address	
11- FIRMWARE UPDATING	12
12- DISPLAY FUNCTIONS	13
13- PERIODIC CLEANING	21
14- PERIODIC CONTROLS	21
15- DMX PROTOCOL	22

1- SYMBOLS

Graphic symbols used on this manual



THIS SYMBOL INDICATES A HOT SURFACE



THIS SYMBOL INDICATES ELECTRIC SHOCK RISK



THIS SYMBOL INDICATES GENERAL RISK



THIS SYMBOL MEANS "DO NOT PLACE THE UNIT ON INFLAMMABLE SURFACES"



THIS SYMBOL INDICATES THE MINIMUM DISTANCE TO BE KEPT BETWEEN THE DEVICE AND THE LIT OBJECT

2- GENERAL WARNING

Read the instruction contained in this user manual carefully, as they give important information regarding safety during installation , use and maintenance.

The device is not for domestic use and must be installed by a qualified electrician or experienced person.

Always disconnect the device from the mains before maintenance.

The device must always be equipped with an efficient ground connection.

3- GENERAL WARRANTY CONDITIONS

The unit is guaranteed for 36 months from the date of purchase against manufacturing material defects.

4- TECHNICAL FEATURES

Robust and resilient, DELTA 10 R ZOOM is a new LED moving head designed for the road and ideal for rental applications that demand intense and nearly continuous usage.

DELTA 10 R ZOOM is the brightest LED colour changer in its category: 5.000 Lux at 5 m (15°).

In fact its light source is composed of 240 x LEDs (60 Red, 60 Green, 60 Blue, 60 White) with 19.500 total lumens.

The DELTA 10 R ZOOM features a motorized Zoom 15°- 40° with high efficiency optic system.

The LEDs even distribution pattern featuring the same quantity of red, green and blue LEDs guarantees high mixing quality for RGBW colours and a uniform projection on surfaces, no matter what colour is used.

DELTA 10 R ZOOM can generate 16 million colours; colour temperature can be varied over a linear range from 2800°K to 6500°K.

DELTA 10 R ZOOM offers an IP20 protection rating.

DELTA 10 R ZOOM has a full-range AC 90-260 V, 50-60 Hz power supply, and therefore ensures reliable operation even in the case of voltage drops.

DELTA 10 R ZOOM can be used without external consoles, in chains of colour changers including up to 32 units.

DELTA 10 R ZOOM offers a range of exclusive functions, including the possibility of memorizing a personalized white either from the menu or via DMX.

The white is recalled with the dedicated DMX "White" channel.

All functions of the internal DELTA 10 R ZOOM menu can be programmed and memorized in a sequence of events (including different luminosity settings, generation of 16 million different colours, special effects, etc.), which can be played back in a predetermined sequence.

The DELTA 10 R ZOOM FAR features also a Free Axis Rotation ("FAR") system.

The FAR allows limitless pan and tilt rotation: the DELTA head rotates freely on its axes, horizontally or vertically, without interruption, in either direction, never having to reverse motion.

The Delta 10 R ZOOM is also available with White+Amber leds (180 white + 60 amber).

On demand it is also available in RGBA version.

DELTA 10 R ZOOM RGBW FAR

(Cod. 03.LDR004.TF)

• Electronic Power Supply • Motorized Zoom • FAR system

DELTA 10 R ZOOM RGBW

(Cod. 03.LDR004.T)

• Electronic Power Supply • Motorized Zoom

LED technology

240 LEDs (60 Red, 60 Green, 60 Blue, 60 White)

LEDs average lifespan: 100.000 hours

Total luminous flux 19.500 Lumens

RGBW colour generation (16 million colours)

Colour temperature variable on a linear range

(3.200°K÷6.500°K); no infrared / no ultraviolet emissions

Optical units

Motorized Zoom 15°-40°

User interface

OLED Colour display + 4 buttons

Independent operation

Fully programmable via built-in user interface

Master or Slave capability (chains of up to 32 interconnected units)

4- TECHNICAL FEATURES

Remote control

Remotely controlled by cable or wireless (optional); USITT DMX 512 serial digital protocol

DMX channels:

20 DMX channels

Protection

IP20 protection level

Movements

Horizontal/pan (540°) – vertical/tilt (270°)

Free Axis Rotation ("FAR") system; Safety-locking system

Power supply

Full range AC 90 260V 50 60Hz

Power consumption:

* 90 V – 5,3 A – 480 W * 120 V – 4 A – 480 W

* 230 V – 2,1 A – 480 W * 260 V – 1,85 A – 480 W

Thermal Operating ambient temperature

-10° / 40°

Standard accessories

"GQuick" clamps with fast-lock connection 1/4 turn

Finishes

Black colour; White

Certification and Safety

Certification CE

LED Class

Class 2 LED product

Dimensions

Packaging Dimensions (LxWxH)

550 x 440 x 800 mm

Weight:


35 Kg

Unit Dimensions (LxWxH)

510x415x690mm

Weight:

28 Kg



5- ACCESSORIES

As standard

- 1 x POWERCONN male cable connector (cod. 0520P014)
- 1 x XLR 5 Pins male cable connector (cod. 0508B028)
- 1 x XLR 5 Pins female cable connector (cod. 0508B027)
- 2 x "C" Clamp GQUICK with "Fast Lock" connection 1/4 turn (max. load. 80Kg) (cod. 0521A014)
- User's manual

Optional (on request)

Flight cases

- Double Professional Flight case; compartment for accessories, swivel wheels, cover with hinges with-stay, dishes on cover for piling, 8 handles (2 eachside) (cod. 0521C032)

Rain covers

- Rain cover for XR base (top) (cod. 03.MA001)
- Rain cover for XR base (bottom) (cod. 03.MA002)

Embedding flanges

- Embedding flange for XR (no visible display) (cod. 03.MA006)
- Universal recessed support for XR (cod. 03.MA007)

Wireless DMX receivers retrofits



- Wireless DMX Receiver Card with INDOOR IP20 2dBi antenna included (cod. 0508A033)

Clamps / safety wires

- "C" Clamp G60 black (max. load 50Kg) (cod. 0521A004)
- "C" Clamp G60 chrome (max. load. 50Kg) (cod. 0521A004.20)
- "C" Clamp GQUICK with "Fast Lock" connection 1/4 turn (max. load. 80Kg) (cod. 0521A014)
- "C" Clamp G100 black / professional (max. load. 200Kg) (cod. 0521A015)
- Omega clamp with "Fast Lock" connection 1/4 turn 1 couple (2 pieces) (Cod. 02K00467)
- Safety wire (3mm x 60 cm), ring spring catch, max. capacity load 60Kg (cod. 0521A010)

6- IMPORTANT SAFETY INFORMATION

6.1 Fire prevention:

- Never locate the fixture on any flammable surface.
- Minimum distance from flammable materials: 1,5 MT. 
- Minimum distance from the closest illuminable surface: 0,5 MT. 
- Replace any blown or damaged fuses only with those of identical value.
- Refer to the wiring diagram if there is any doubt.
- Connect the projector to mains power via a thermal magnetic circuit breaker.


6.2 Prevention of electric shock:



- High voltage is present inside the unit. Unplug the unit prior to performing any function which involves touching the inside of the moving head.
- The level of technology inherent in the DELTA 10 R ZOOM requires the assistance of specialised personnel for all servicing. Please refer to an authorised DTS service centre.
- A good earth connection is essential for proper functioning of the projector.
- Never connect the unit without proper earth connection.
- The fixture should be located in places with a good air ventilation.

6.3 Safety:



- The projector should always be installed with bolts, clamps and other tools that are capable of supporting the weight of the unit.
- Always use a second safety cable to sustain the weight of the unit in case of the failure of the main fixing point.
- The external surface of the unit, at various points, may exceed 70°C.  Never handle the unit until at least 10 minutes have elapsed since the projector was turned off.
- Never install the fixture in an enclosed area lacking sufficient air flow. The ambient temperature should not exceed 40°C.

6.4 Level of protection against the penetration of solid and liquid objects:



- The projector is classified as an ordinary appliance and its protection level against the penetration of solid and liquid objects is IP 20.

For outdoor use, D.T.S. recommend the use of the dedicated raincovers:

- Rain cover for XR base (top) (cod. 03.MA001)
- Rain cover for XR base (bottom) (cod. 03.MA002)

7- VOLTAGE AND FREQUENCY

The DELTA 10 R ZOOM can operate at 90-260 VOLT 50 or 60 Hz.

8- INSTALLATION

DELTA 10 R ZOOM may be either floor or ceiling mounted.

For floor mounting installations, the DELTA 10 R ZOOM is supplied with four rubber mounting feet on the base.

For ceiling mounted installations, we recommend the use of appropriate clamps to fix the unit to the mounting surface.

The supporting structure from which the unit is hung should be capable of bearing the weight of the unit, as should any clamps used to hang it. The structure should also be sufficiently rigid so as not to move or shake whilst the DELTA 10 R ZOOM is moving.

Four 1/4 turn Fast Locks connections placed in the base of the units allow to hang the DELTA 10 R ZOOM by using the two Fast Lock 'C' clamps provided in the box.




8.1- Safety cable



We recommend the use of a safety chain/cord connected to the DELTA 10 R ZOOM and to the suspension truss in order to avoid the fixture accidentally falling should the main fixing point fail.

Make sure that the iron cable or chain can bear the weight of the entire unit.

You may attach the safety chain/cord to the two holes (A) located on the base of the fixture, as shown in the picture below.

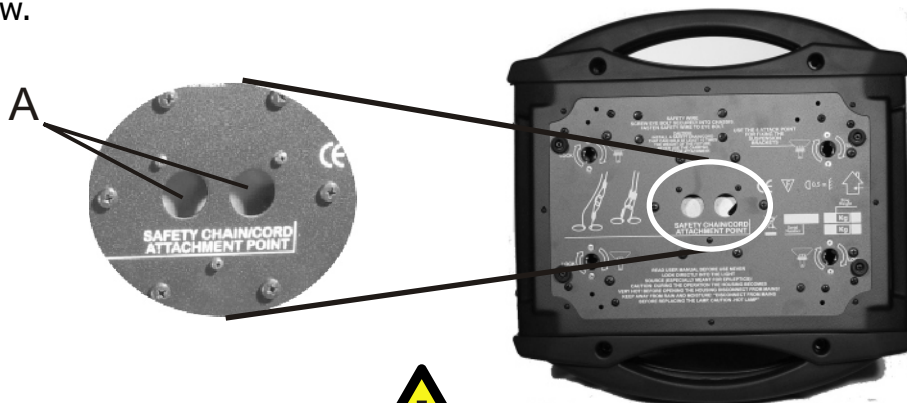

8.2- Protection against liquids



The projector contains electric and electronic components which should under no circumstances come into contact with oil, water or any other liquid. The proper unit functioning would be compromised should this occur.

8.3- Movement

Unlimited Pan rotation; unlimited Tilt rotation (DELTA 10 R ZOOM F.A.R.)
Pan 540° (3,9 sec.), Tilt 270° (2,6 sec.) (DELTA 10 R ZOOM)

Free Axis Rotation ("F.A.R.")



WARNING

Do not place any object in the path of the projector's movement



No Free Axis Rotation ("F.A.R.")

8.4- Risk of fire

Each fixture produces heat and must be installed in a well-ventilated place.
The minimum recommended distance from flammable material is 1,5 MT.



Minimum distance from the object being illuminated is 0,5 MT. $\varnothing 0,5M$

8.5- Forced ventilation

You will note, on inspection, that the unit features various air inlets and cooling fans located on the head of the fixture. These should, under no circumstances, be blocked or obstructed whilst the projector is in operation.

Doing so could cause the fixture to seriously overheat thereby compromising its proper operation.

8.6- Ambient temperature

The projector should never be installed in places that lack a constant air flow.
The ambient temperature should NOT exceed 40°C.

9- MAINS CONNECTION

DELTA 10 R ZOOM operate at 90-260 VOLT 50-60 Hz.
Prior to connecting the unit to your mains supply, ensure that the model in your possession correctly matches the mains supply available. For connection purposes, ensure that your plug is capable of supporting 5 amps at 230 V, or 10 amps at 100-120 V.
Strict adherence to regulatory norms is strongly recommended.



Mains
90-260V AC 50 / 60Hz

9.1- Protection

The use of a thermal magnetic circuit breaker is recommended for each DELTA 10 R ZOOM.
A good earth connection is essential for the correct operation of the projector.



10- DMX SIGNAL CONNECTION


The unit operates using the digital DMX 512 (1990) signal. Connection between the mixer and the projector or between projectors must be carried out using a two pair screened \varnothing 0.5 mm cable and a XLR 5 or 3 pins connector.

Ensure that the conductors do not touch each other. Do not connect the cable ground to the XLR chassy. The plug housing must be isolated. Connect the mixer signal to the DMX IN projector plug and connect it to the next projector by connecting the DMX OUT plug on the first projector to the DMX IN plug of the second one.

This way, all the projectors are cascade connected.


NB. If the display showing the DMX address flashes, then one of the following errors has occurred:

- DMX signal not present
- DMX address not valid
- DMX reception problem

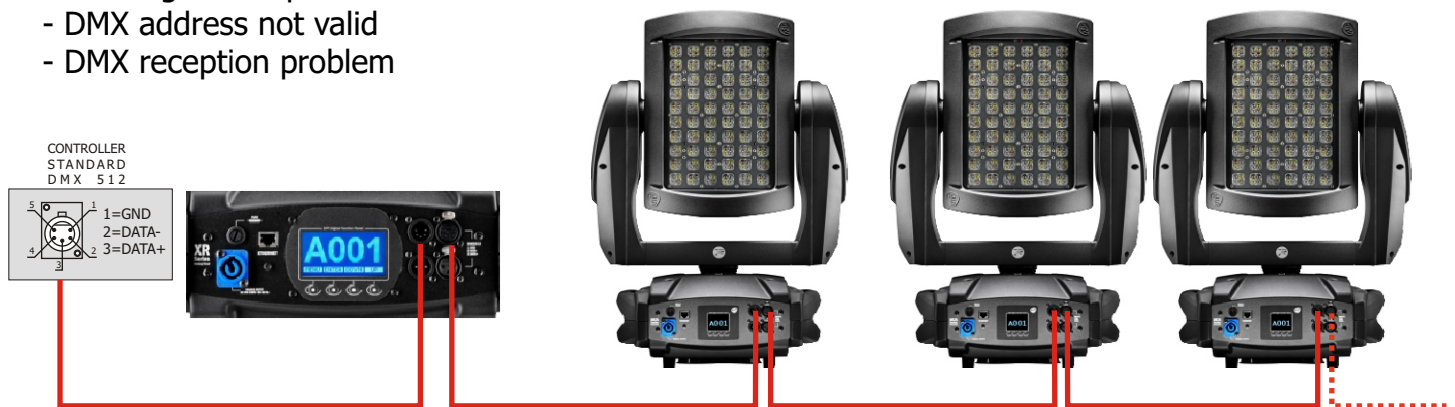


For Installations where long distance DMX cable connections are needed, we suggest to use a DMX terminator.

The DMX terminator is a male XLR 3-5 pins connector with a 120 ohm resistor between pin 2 and 3. The DMX terminator must be plugged into the last unit (DMX out panel connector) of the DMX line.



PLACE A 120 OHM RESISTOR BETWEEN PIN 2 AND 3 OF A MALE XLR CONNECTOR AND PLUG IT INTO THE DMX OUT PANEL CONNECTOR OF THE LAST UNIT CONNECTED TO THE DMX LINE



10.1-DMX Addresses

DELTA 10 R ZOOM F.A.R. and DELTA 10 R ZOOM, can be controlled with 20 DMX channels.

In order to use the unit in 20 channels, set the following addresses on the mixer:

Projector 1	A001	
Projector 2	A021	If you want to select the next projector, just add "20"
Projector 3	A041	
.....	A...	
projector 6	A101	

10.2-Selecting the DMX address

1) Press the UP-DOWN key until you reach the required DMX channel. The numbers on the display will start to flash (but the new DMX address hasn't yet been set).

2) Press ENTER to confirm your selection. The numbers on the display will stop flashing and the projector is now setted to the new DMX address.

TRICKS:

If you keep pushed the UP or DOWN keys, the channels are calculated more quickly and you get a faster selection.

11- FIRMWARE UPDATING

Warning:

This procedure require a base knowlege of computer applications and Windows Hyperterminal program. **Please refer to an authorised DTS service centre.**



To update the software version of the DELTA 10 R ZOOM you need:

D.T.S. RED BOX interface (D.T.S. Code: 03.LA.008).

USB-DMX Drivers for the D.T.S. RED BOX interface.

(The drivers and the installation procedure are available in our web site www.dts-lighting.it)


'Updating the software version'

Please follow the procedure below to perform the update:

1. Install the D.T.S. RED BOX USB-DMX driver on the PC you will use to update the unit software.
2. Connect the D.T.S. RED BOX interface to the PC by using a USB cable.
3. Connect the D.T.S. RED BOX interface to the fixture by using a DMX cable.
4. Download the new software version into the unit by using Windows Hyperterminal program.

It will be possible to download the software from the reserved area of D.T.S. web site: www.dts-lighting.it.

12- DISPLAY FUNCTIONS

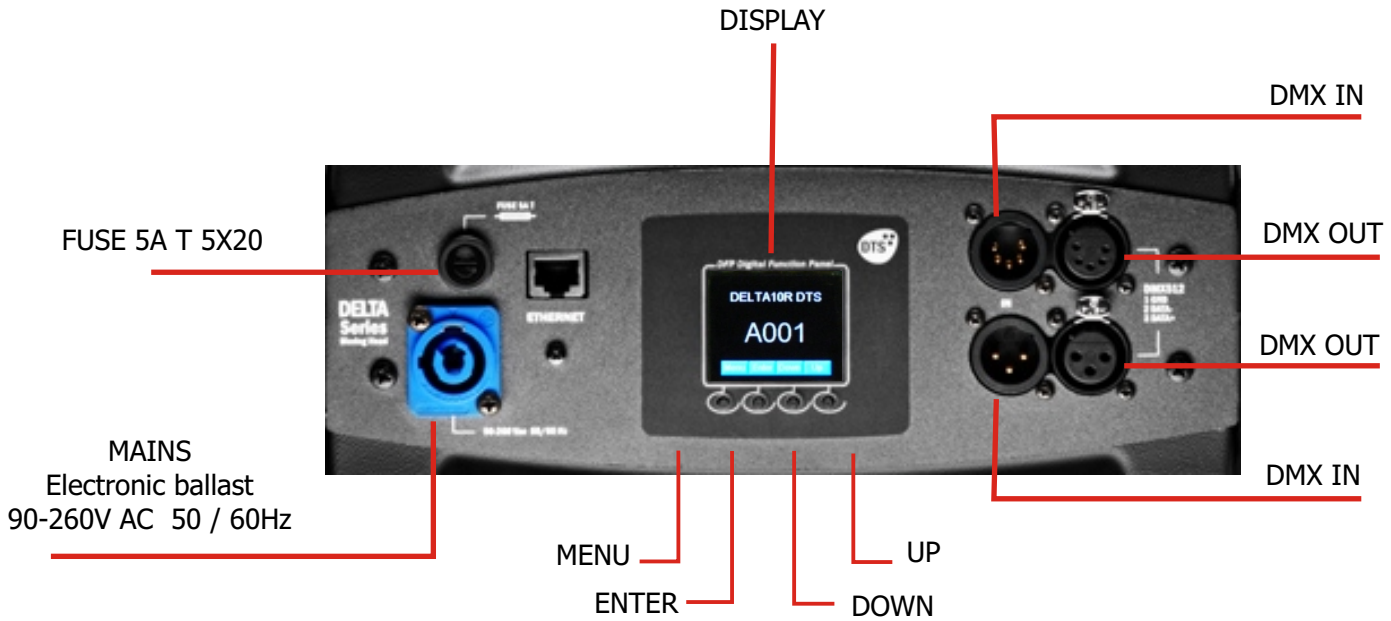

DISPLAY FUNCTIONS

The DELTA 10 R ZOOM display panel shows all the available functions . Using these functions, it is possible to change some of the parameters and add some functions. Changing the DTS setting can vary the functions of the unit so that it does not respond to the DMX 512 used to control it. Carefully follow the instructions below before carrying out any variations or selections.

NOTE: the symbol  shows which key has to be pushed to obtain the desired function.

Software version 2.19


  Display

DISPLAY POSITION / STAND BY

Display Position:
Reverses display's reading depending on the mounting position (on the ground or suspended).

Display Standby:
To turn off the display (after 5 seconds) or leave it always on.

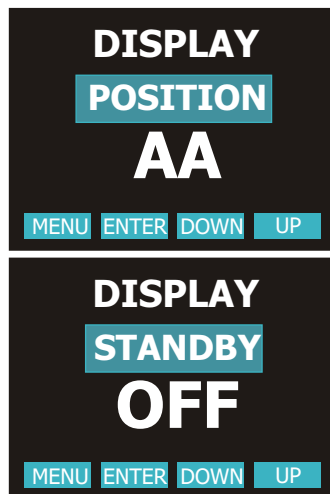

Display Position
ON THE GROUND (Default)
SUSPENDED

 ENTER

Display Standby
OFF = Display Standby disabled (Default)
ON = Display goes OFF after 5 seconds


 ENTER

12- DISPLAY FUNCTIONS


DMX Set

DMX MODE / MACRO
DMX Mode
20 channels

Macro
Macro Function, enable channel
mapping macro rainbow effects
STD (default)



DMX mode
20 channels



MACRO
Standard mode enabled (Default)
Extended mode enable: Rainbow
effects on MACRO channel

LED

RGBA MINIMUM VALUES
This menu allow to select the
minimum levels for Red, Green,
Blue and Amber/White

RGBA MAXIMUM VALUES
This menu allow to select the
maximum levels for Red, Green,
Blue and Amber/White


These settings have priority on
Master Dimmer (DMX channel 9)

SMOOTH VALUE
This menu allow to select the value
of the delay (in milliseconds) for
RGBA and Dimmer channels
reaction to DMX or Program
variation.
Off = 25 ms delay (Fast response)
20 = 250 ms delay (Slow response)


GAMMA CORRECTION
This menu allow to select between
Linear current output or Quadratic
current output for LEDs
Default = Linear

OUTPUT FREQUENCY
This menu allow to adjust the PWM
frequency value (Hz) in order to
reduce flickering in the process of
your camera recordings


BOOST DRIVING
This menu allow to increase the LED's
current from 350 mA to 500 mA

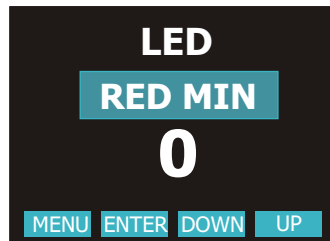


RED Min default = 0
RED Max default = 100

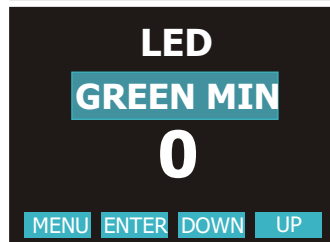


BLUE Min default = 0
BLUE Max default = 100

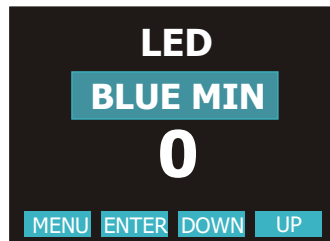

GREEN Min default = 0
GREEN Max default = 100

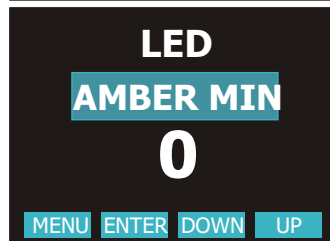

AMBER Min default = 0
AMBER Max default = 100

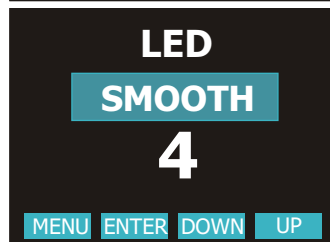

SMOOTH
Range = Off - 20
Default = 4

12- DISPLAY FUNCTIONS

LED


GAMMA CORRECTION
This menu allow to select between Linear current output or Quadratic current output for LEDs
Default = Linear

OUTPUT FREQUENCY
This menu allow to adjust the PWM frequency value (Hz) in order to reduce flickering in the process of your camera recordings


BOOST DRIVING
This menu allow to increase the LED's current from 350 mA to 500 mA



GAMMA CORRECTION
Linear = Linear current output
Quadratic = Linear light output



OUTPUT FREQUENCY
Range = 610 Hz -10 KHz
Default = 610 Hz



BOOST
With BOOST active, the LED's current is set to 500 mA (30% more gain).
Default = Enabled

AUTO

AUTOMATIC MODE
Automatic demo game without DMX controller.

STEP 01/16
Chase with 16 steps previously created in REC MODE
Speed time, Wait time, Dimmer, Pan, Tilt and Zoom values selectable by user.




PERSONAL COLOURS
RGBA, Dimmer, Shutter, Pan, Tilt and Zoom values selectable by user.

RAINBOW
Rainbow colours effect.
Speed time, Dimmer, Shutter, Pan, Tilt and Zoom values selectable by user.

FIXED COLOURS
Sixteen Colour Macros as on "MACRO" channel.
Dimmer, Shutter, Pan, Tilt and Zoom values selectable by user.

WHITE MACROS
Sixteen macros for White color from 2800 to 6500 ° K.
Dimmer, Shutter, Pan, Tilt and Zoom values selectable by user.





12- DISPLAY FUNCTIONS

AUTO

AUTOMATIC MODE
Automatic demo game without DMX controller

FIXED COLOURS
Sixteen Colour Macros as on "MACRO" channel.

Dimmer, Shutter, Pan, Tilt and Zoom values selectable by user.

WHITE MACROS
Sixteen macros for White color from 2800 to 6500 ° K.
Dimmer, Shutter, Pan, Tilt and Zoom values selectable by user.

AUTO-FIXED COL.

COLOR

1

MENU ENTER DOWN UP

AUTO-WHITE

WHITE NO.

1

MENU ENTER DOWN UP

By setting all the units connected to the MASTER, to DMX address 1, them will be synchronized with the Master unit following the chase selected on it, including TIME, WAIT, Pan&Tilt and Zoom position of the MASTER unit.

EMERGENCY

EMERGENCY
Emergency operating mode.
By setting Emergency mode, it will be possible to select one of the 16 preprogrammed WHITE cues that will then ran if DMX signal is missing or not available. Useful for Emergency EXIT illumination on public areas.
Dimmer level, Pan&Tilt and Zoom values selectable by user.

EMERGENCY

SELECTION

OFF

MENU ENTER DOWN UP

EMERGENCY
Default = OFF (Disabled)

EMERGENCY

SELECTION

ON

MENU ENTER DOWN UP

EMERGENCY
ON (Enabled)

EMERGENCY

WHITE

1

MENU ENTER DOWN UP

WHITE 1-16
Default = WHITE 1

EMERGENCY


DIMMER

255


MENU ENTER DOWN UP

DIMMER
Default = 255

12- DISPLAY FUNCTIONS

  EMERGENCY


 

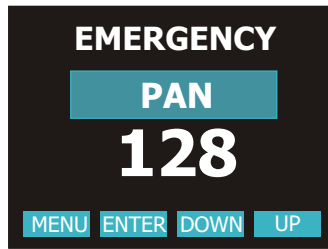

PAN
Default = 128



TILT
Default = 128


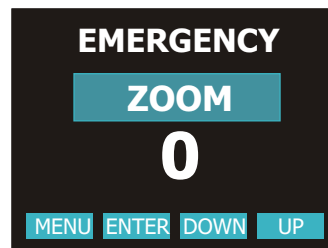


ZOOM
Default = 0

  DEFAULT SET

DEFAULT SETTINGS
To restore default settings

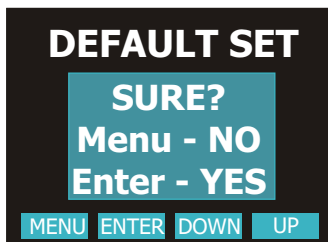

12- DISPLAY FUNCTIONS

  **TEMPER. °C**



TEMPERATURE
Unit temperature

TEMPER. °C

028.7

MENU ENTER DOWN UP

  **TIME**

LIFE TIME
This menu show the total UNIT life time
and the RGBA life time



TIME

UNIT

13 Hr - 08 min

MENU ENTER DOWN UP

TIME

RED

0 Hr - 08 min

MENU ENTER DOWN UP

TIME

GREEN

0 Hr - 08 min

MENU ENTER DOWN UP

TIME

BLUE

0 Hr - 08 min

MENU ENTER DOWN UP

TIME

AMBER

0 Hr - 08 min

MENU ENTER DOWN UP

12- DISPLAY FUNCTIONS

SYSTEM

PAN INVERTION / TILT INVERTION /
PAN-TILT SPEED / ZOOM SPEED / FAN MAX SPEED /
RESET BY DMX / MOTORS FIRMWARE UPGRADE.

PAN INVERSION

This menu allows to set the Pan movement.
Normal or Reversed.

TILT INVERTION

This menu allows to set the Tilt movement.
Normal or Reversed.

PAN TILT SPEED

Pan Tilt Speed control (1-4)

ZOOM SPEED

Zoom speed control (High or Low)
Menu implemented from software
2.19 and unit with serial number
D134M0077/11

FAN MAX SPEED








This menu' allow to select the
internal fans speed.

RESET BY DMX

This menu' allow to enable / disable
the Motors reset control (Pan&Tilt
and Zoom) via DMX.

MOTORS FIRMWARE UPGRADE

This menu' allow to upgrade the
firmware into ZOOM and Pan&Tilt
stepper motors circuit boards.

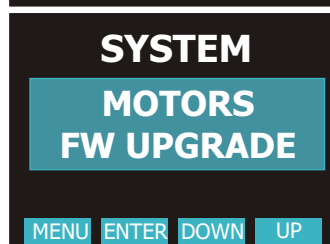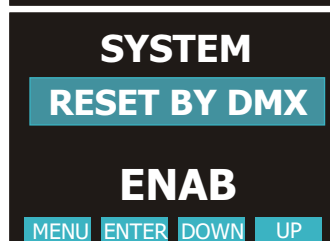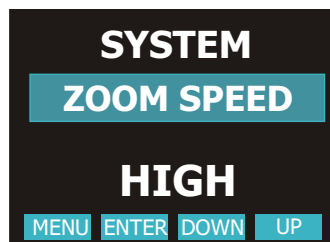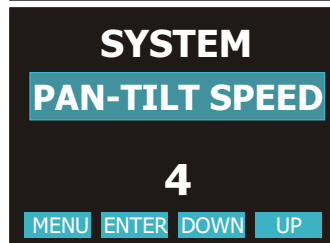

PAN INVERTION
Default = NORM



TILT INVERTION
Default = NORM

PAN TILT SPEED CONTROL
Default = 4

ZOOM SPEED
Low - High (Default = HIGH)
Low = fixed zoom speed (not
selectable by user) on units
with previous software 2.16 and
serial number till D134I0076/11

FAN MAX SPEED
50% - 100%
Default = 100%

RESET BY DMX
Enable: Motors reset enabled via
DMX (Default).
Disabled: Motors reset disabled via
DMX.
Now: Instant motors reset.

MOTORS FIRMWARE UPGRADE
ZOOM and Pan&Tilt stepper motors
circuit boards firmware upgrade.

12- DISPLAY FUNCTIONS

  SOFTWARE

SOFTWARE
LEDs circuit board software, MOTORS
circuit boards software (Pan&Tilt - Zoom)

SOFTWARE

LED

Id 0D0D07C1
v2.19 Dec 20 2011

MENU
ENTER
DOWN
UP

SOFTWARE

Motors

Pan/Tilt v.23
Zoom v.14

MENU
ENTER
DOWN
UP

LEDs CIRCUIT BOARD SOFTWARE

 ENTER

MOTORS CIRCUIT BOARDS
SOFTWARE
PAN&TILT - ZOOM

13- PERIODIC CLEANING

Front lenses glass

The dust can reduce the luminous output substantially. Regularly clean the front lenses glass using a soft cotton cloth, dampened with a specialist lens cleaning solution.

Fans and air passages

The fans and air passages must be cleaned approximately every 6 weeks. This periodic cleaning will depend of course, on the conditions in which the projector is operating. Suitable instruments for performing this type of maintenance are a brush and a common vacuum cleaner or an air compressor. If necessary, clean the fans and air passages more frequently.

14- PERIODIC CONTROLS



Mechanical parts

Periodically check all mechanical parts and the gaskets, replacing them if necessary.

Electrical components

Check all electrical components for correct earthing and proper connection of all connectors, refastening if necessary.

Attention: Disconnect mains power prior to removing the projector housing.



Fuse replacement

Locate the fuse, which protects the lamp and electronics, in the base of the DELTA 10 R ZOOM. Using a multimeter, test the condition of the fuse, replacing it with one of equivalent type if necessary.

Attention: Disconnect mains power prior to removing the projector housing.



15- DMX PROTOCOL

DELTA 10 R ZOOM F.A.R. • F.A.R. system (free axis rotation)
 DELTA 10 R ZOOM (no F.A.R. system)

20 CHANNELS MODE (DEFAULT)

- 1 PAN msb 540°**
- 2 PAN lsb**
- 3 TILT msb 270°**
- 4 TILT lsb**
- 5 SPEED MOVEMENT**
- 6 PAN FAR** (active only for DELTA 10 R ZOOM F.A.R.; No Function for DELTA 10 R ZOOM)
- 7 TILT FAR** (active only for DELTA 10 R ZOOM F.A.R.; No Function for DELTA 10 R ZOOM)
- 8 SHUTTER**
- 9 DIMMER**
- 10 RED**
- 11 GREEN**
- 12 BLUE**
- 13 AMBER / WHITE**
- 14 WHITE PREPROGRAMMED**
- 15 CTC**
- 16 MACRO**
- 17 FUNCTION**
- 18 ZOOM**
- 19 SPEED ZOOM**
- 20 RESET**

DMX CHANNEL	1	Parameter: PAN msb
-------------	----------	---------------------------

DMX CHANNEL	2	Parameter: PAN lsb
-------------	----------	---------------------------

DMX CHANNEL	3	Parameter: TILT msb
-------------	----------	----------------------------

DMX CHANNEL	4	Parameter: TILT lsb
-------------	----------	----------------------------

DMX CHANNEL	5	Parameter: SPEED MOVEMENT
-------------	----------	----------------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
000-010					Standard
011-025					Fast movement
026-127					Vector mode from fast to slow
128-247					Variable time reaction to DMX signal (fast to slow)
248-255					Slow reaction time to DMX signal

DMX CHANNEL	6	Parameter: PAN FAR
-------------	---	---------------------------

(active only for DELTA 10 R ZOOM F.A.R.; No Function for DELTA 10 R ZOOM)

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
000-010					Position mode 540° (standard path)
011-020					Position mode 360° (1 turn)
021-030					Position mode 720° (2 turns)
031-040					Position mode 1080° (3 turns)
041-050					Position mode 1440° (4 turns)
051-060					Position mode 1800° (5 turns)
061-070					Position mode 2160° (6 turns)
071-080					Position mode 2520° (7 turns)
081-090					Position mode 2880° (8 turns)
091-100					Position mode 3240° (9 turns)
101-110					Position mode 3600° (10 turns)
111-120					Position mode 360° smart path
121-182					Forward spin rotation speed from max to min
183-193					Stop
194-255					Reverse spin rotation speed from min to max

DMX CHANNEL	7	Parameter: TILT FAR
-------------	---	----------------------------

(active only for DELTA 10 R ZOOM F.A.R.; No Function for DELTA 10 R ZOOM)

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
000-010					Position mode 270° (standard path)
011-020					Position mode 360° (1 turn)
021-030					Position mode 720° (2 turns)
031-040					Position mode 1080° (3 turns)
041-050					Position mode 1440° (4 turns)
051-060					Position mode 1800° (5 turns)
061-070					Position mode 2160° (6 turns)
071-080					Position mode 2520° (7 turns)
081-090					Position mode 2880° (8 turns)
091-100					Position mode 3240° (9 turns)
101-110					Position mode 3600° (10 turns)
111-120					Position mode 360° smart path
121-182					Forward spin rotation speed from max to min
183-193					Stop
194-255					Reverse spin rotation speed from min to max

DMX CHANNEL	8	Parameter: SHUTTER
-------------	----------	---------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-9					Black - out
10-19					Open
20-29					Black-out
30-119					Strobe (from 3.27 s to 30 ms)
120-149					Pulse up (from 42.6s to 120ms)
150-179					Pulse down(from 42.6s to 120ms)
180-204	Random strobe (Dimmer, Red, Green, Blue, Amber channels active)				
205-229	Full independent Random Strobe (Dimmer, Red, Green, Blue, Amber channels disabled)				
230-255					Open

DMX CHANNEL	9	Parameter: DIMMER
-------------	----------	--------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-7					Black-out
8-255					Proportional dimmer

DMX CHANNEL	10	Parameter: RED
-------------	-----------	-----------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	11	Parameter: GREEN
-------------	-----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	12	Parameter: BLUE
-------------	-----------	------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	13	Parameter: AMBER \ WHITE 5600° K
-------------	-----------	---

DMX range Value	Mid point DMX value	Move Range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	14	Parameter: WHITE (Pre-programmed White at diff. color temperature)
-------------	-----------	---

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-55	23				No Function
56-105	80				Full (Red-Green-Blue at Full)
106-155	130				White DTS
156-205	180				Custom White Create (RGB levels selectable by DMX)
206-255	230				White CTC (Channel 15 CTC enabled)

DMX CHANNEL	15	Parameter: CTC (Colour temperature correction)
-------------	-----------	---

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function

IF CHANNEL 14 (White) = WHITE CTC (DMX range value 206 - 255)

0-255	Linear control temperature correction: 0 = 2000° K / 255 = 7200° K
--------------	---

DMX CHANNEL	16	Parameter: COLOUR MACROS
-------------	----	---------------------------------

IF:  **DMX SET**  **MACRO**  **STD** 

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-14					No Function
15-29					Macro 1
30-44					Macro 2
45-59					Macro 3
60-74					Macro 4
75-89					Macro 5
90-104					Macro 6
105-119					Macro 7
120-134					Macro 8
135-149					Macro 9
150-164					Macro 10
165-179					Macro 11
180-194					Macro 12
195-209					Macro 13
210-225					Macro 14
226-239					Macro 15
240-255					Macro 16

DMX CHANNEL	16	Parameter: COLOUR MACROS
-------------	----	---------------------------------

IF:  **DMX SET**  **MACRO**  **EXT** 

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-14					No Function
15-22					Macro 1
23-30					Macro 2
31-38					Macro 3
39-46					Macro 4
47-54					Macro 5
55-62					Macro 6
63-70					Macro 7
71-78					Macro 8
79-86					Macro 9
87-94					Macro 10
95-102					Macro 11
103-110					Macro 12
111-118					Macro 13
119-126					Macro 14
127-134					Macro 15
135-142					Macro 16

DMX CHANNEL	16	Parameter: COLOUR MACROS
-------------	----	---------------------------------

IF:   **DMX SET**   **MACRO**  **EXT** 

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
143-150					Rainbow Speed 1 (1 Sec.)
151-158					Rainbow Speed 2 (5 Sec.)
159-166					Rainbow Speed 3 (10 Sec.)
167-174					Rainbow Speed 4 (20 Sec.)
175-182					Rainbow Speed 5 (30 Sec.)
183-190					Rainbow Speed 6 (60 Sec.)
191-198					Rainbow Speed 7 (120 Sec.)
199-206					Rainbow Speed 8 (180 Sec.)
207-214					Random Speed 1 (0.5 sec.)
215-222					Random Speed 2 (1 Sec.)
223-230					Random Speed 3 (2 Sec.)
231-238					Random Speed 4 (5 Sec.)
239-246					Random Speed 5 (10 Sec.)
247-255					Random Speed 6 (30 Sec.)

DMX CHANNEL	17	Parameter: FUNCTIONS (Recall, Create and Store the Custom white)
-------------	----	---

IF CHANNEL 14 WHITE = DMX range value 156 - 205

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-79					Custom White Recall
80-160					Custom White Create (Enable CH 10/11/12/13 for Custom white Creation)
161-255					Custom White Store (Store the Custom White created)

DMX CHANNEL	18	Parameter: ZOOM
-------------	----	------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Linear ZOOM from Narrow to Wide

DMX CHANNEL	19	Parameter: ZOOM SPEED
-------------	----	------------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional ZOOM SPEED

DMX CHANNEL	20	Parameter: RESET
-------------	-----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-239					No Effect
240-255					Total Reset (activation after 3 sec.)

NOTES

NOTES

NOTES

The information contained in this publication has been carefully prepared and checked. However, no responsibility will be taken for any errors. All rights are reserved and this document cannot be copied, photocopied or reproduced, in part or completely, without prior written consent from D.T.S.

D.T.S. reserves the right to make any aesthetic, functional or design modifications to any of its products without prior notice. D.T.S. assumes no responsibility for the use or application of the products or circuits described herein.

MADE IN ITALY



The Lighting Company

ISO 9001:2000

D.T.S. quality system
is certified to the
ISO 9001:2000 standard



D.T.S. products are designed
and manufactured at the D.T.S.
plants in Italy



05171171