


ASSEMBLY INSTRUCTIONS FOR 31752

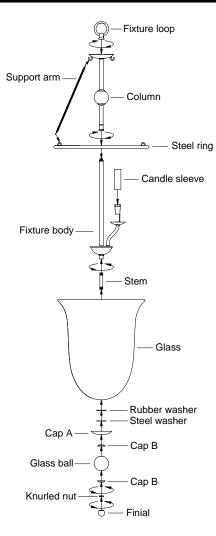

- 1. Before beginning the assembly, carefully unpack and identify all parts referring to the illustration.
- 2. Unravel the supply power and ground wires and pass the holes of column and fixture loop. Thread the fixture loop onto the coupling at the top of column. Hand tightens until snug.
- 3. Put the steel ring onto the fixture body, pass the center hole of steel ring through the protruding stem from fixture body and secure with column as shown in the illustration.
- 4. Carefully attach the loops at the both ends of support arm to the hooks on the column and steel ring as shown.
- 5. Install candle sleeve onto the socket.
- 6. Install proper bulbs (not provided) to the sockets referring to the markings and labels on fixture for maximum wattage.
- 7. Thread the top of stem into the coupling at the underside of fixture body. Hand tightens until snug.
- 8. Locate the glass, rubber washer, steel washer cap A, cap B and glass ball. Carefully pass the center holes of the glass, rubber washer, steel washer, cap A, glass ball and cap B through the stem and secure with knurled nut and finial.
- 9. Restore power to the installation point ON. Retain this sheet for future reference.