

## **INSTALLATION & CONNECTIONS**

#### IMPORTANT:

- Use qualified electrician for proper assembly and installation!
- Please read all instructions prior to installation.
- Installation of this fixture must comply with local building codes.

### **INSTRUCTIONS**


- 1. Trun off power at main fuse box.
- 2. Fasten open end of ground wire from crossbar (A) to ground screw of junction box.
- 3. Mount crossbar (A) to junction box with 2 screws supplied.
- Make sure black and white wires of junction box run through the middle opening of the crossbar.
- 4.Connect black and white wires of power supply to black and white wires of the sconce. NOTE: All wire connections should be made with wire nuts or marettes and pushed back into junction box.
- 5. Mount back plate or canopy of sconce (B) over the 2 screws of crossbar (A). Secure with 2 decorative or caps (C).

#### **BULB AND GLASS INSTALLATION**

- Un-screw the Socket Ring from socket.
  Slip glass over socket and secure with Socket Ring by using TOOL provided.
- 2.Install Type B Bulb 40 Watts Recommended 60 Watts Max.

Bulb not included.

# ITEM NUMBER:#32300 INSTRUCTIONS

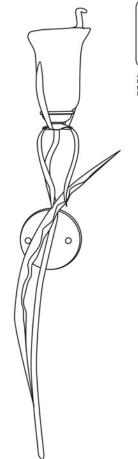





All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



