

TABLE OF CONTENTS

Special notes on LCD monitors	1
Introduction	2
Features	2
Unpacking	3
Attaching/Removing the base	4
Screen position adjustment	4
Connecting the power cord	5
Safety precaution	5
Cleaning your monitor	5
Preset modes	6
Power saving	7
DDC	7
Installation	8
User controls	9
Troubleshooting	13
Specification	14

SPECIAL NOTES ON LCD MONITORS

The following symptoms are normal with LCD monitor and do not indicate a problem.

NOTES

- Due to the nature of the fluorescent light, the screen may flicker during initial use. Turn off the Power Switch and then turn it on again to make sure the flicker disappears.
- You may find slightly uneven brightness on the screen depending on the desktop pattern you use.
- The LCD screen has effective pixels of 99.99% or more. It may include blemishes of 0.01% or less such as a missing pixel or a pixel lit all of the time.
- Due to the nature of the LCD screen, an afterimage of the previous screen may remain after switching the image, when the same image is displayed for hours. In this case, the screen is recovered slowly by changing the image or turning off the Power Switch for hours.

INTRODUCTION

Congratulations for purchasing model AL1917, a high performance 19-inch color TFT LCD monitor. The AL1917 monitor provides flicker-free and color images at optional resolutions. Through this user guide, we will introduce you step-by-step all the features, functions and technical specifications of the LCD monitor. Surely you will have a refreshing experience working with the monitor.

FEATURES


The AL1917 is a 19-inch TFT LCD monitor that is intelligent, microprocessor-based and ergonomically designed display, compatible with most analog RGB (Red, Green, Blue) display standards, including PS/V, PS/2, optional for Apple Macintosh Centris, Quadra, and Macintosh II family signals. The LCD monitor is capable of displaying crisp and vibrant color graphics with VGA, SVGA, XGA, SXGA (non-interlaced), and most Macintosh compatible color video cards.

- The monitor is able to properly function even in case of upgrade video cards or software because of the wide auto-scanning compatibility range without requiring to buy a new monitor.
- The internal microprocessor digitally controls auto-scanning. For horizontal scan frequencies between 30 KHz and 81 KHz, and vertical scan frequencies between 55 Hz and 76 Hz. In each frequency mode, the microprocessor-based circuitry allows the monitor to function at the precision-of a fixed frequency.
- The resident memory allows for storing factory default settings and also additional user adjustment parameters.
- The maximum resolution achievable is SXGA (1280 x 1024), best suited for Windows applications
- The compact and sleek cabinet design saves lot of your desk space and makes your desk look neat and tidy.
- The monitor is also compliant with the most stringent environmental scheme of TCO 99. In this scheme, no environmental harmful substances are used during the entire manufacturing process.


UNPACKING

Please check the following items are present when you unpack the box, and save the packing materials in case you will need to ship or transport the monitor in future.

- LCD Monitor

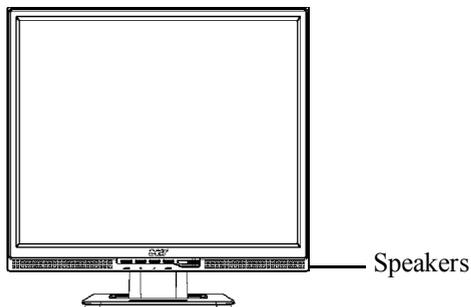


- AC Power Cord



- 15-pin D-Sub Cable



- DVI Cable
(Only Dual-Input Model)



- Audio Cable



- User Manual




- Quick Start Guide



Attaching / Removing the Base


Install:

Align the four hooks on the bottom of the monitor with the corresponding slots on the bottom of the base.

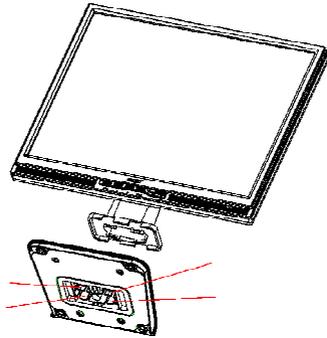

Remove:


Depress the four hooks as indicated first before removing the base and follow the arrow direction to remove it.

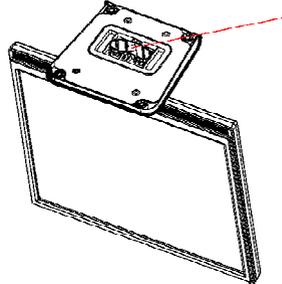

SCREEN POSITION ADJUSTMENT

In order to optimize the best viewing position, you can adjust the tilt of the monitor by using both of your hands to hold the edges of the monitor as shown in the figure below.

The monitor can be adjusted to 15 degrees up or 5 degrees down as indicated by arrow below.

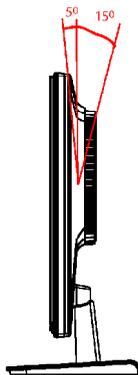

CONNECTING THE POWER CORD

- Check first to make sure that the power cord you use is the correct type required for your area.
- This monitor has a universal power supply that allows operation in either 100/120V AC or 220/240 V AC voltage area. No user-adjustment is required.
- Plug one end of the power cord to the AC Inlet, plug another end to a proper AC outlet.
- For unit using at 120 V AC:
Use a UL Listed Cord Set, Type SVT wire and plug rated 10 A/125 V.
- For unit using at 220/240 V AC (outside of U.S.):
Use a Cord Set consisting of H05VV-F cord and plug rated 10 A, 250 V. The cord set should have the appropriate safety approvals for the country in which the equipment will be installed.

SAFETY PRECAUTION

- *Avoid placing the monitor, or any other heavy object, on the power cord to avoid damage to the cable.*
- *Do not expose the monitor to rain, excessive moisture, or dust.*
- *Do not cover the ventilation slots or openings of the monitor. Always put the monitor in a place where there is adequate ventilation.*
- *Avoid placing the monitor against a bright background or where sunlight or other light sources may reflect on the face of the monitor. Place the monitor just below eye level.*
- *Handle with care when transporting the monitor.*
- *Refrain from giving shock or scratch to the screen, as screen is fragile.*
- **LAMP Disposal**

LAMP(S) INSIDE THIS PRODUCT CONTAIN MERCURY AND MUST BE RECYCLED OR DISPOSED OF ACCORDING TO LOCAL, STATE OR FEDERAL LAWS. FOR MORE INFORMATION, CONTACT THE ELECTRONIC INDUSTRIES ALLIANCE AT WWW.EIAE.ORG. FOR LAMP SPECIFIC DISPOSAL INFORMATION CHECK WWW.LAMPRECYCLE.ORG.



CLEANING YOUR MONITOR

Please carefully follow the below guidelines when cleaning the monitor.

- Always unplug the monitor before cleaning.
- Use a soft cloth to wipe the screen and cabinet front and sides.
- Apply a small quantity of alcohol to a soft cloth to clean the monitor screen, if requires more than dusting.

PRESET MODES

To reduce the need for adjustment for different modes, the monitor has default setting modes that are most commonly used as given in the table below. For optimum adjustment, the user is suggested to perform the Auto Setup under Windows "Full Screen" pattern. If the mode in use does not match one of the defaults, the user can store their preferred modes in the user modes. The monitor is capable of storing up to 9 user modes. The only condition to store as a user mode is the new display information must have 1 KHz difference for horizontal frequency or 1 Hz for vertical frequency or the sync signal polarities are different from the default modes.

Mode	Resolution			H. Freq. (KHz)	Band Width (MHz)	Polarity	
						H	V
1	VGA	720 x 400	70 Hz	31.47	28.322	-	+
2	VGA	640 x 480	60 Hz	31.47	25.175	-	-
3	MAC	640 x 480	66 Hz	35.00	32.24	-	-
4	VESA	640 x 480	72 Hz	37.86	31.5	-	-
5	VESA	640 x 480	75 Hz	37.50	31.5	-	-
6	VESA	800 x 600	56 Hz	35.16	36	+	+
7	VESA	800 x 600	60 Hz	37.88	40	+	+
8	VESA	800 x 600	75 Hz	46.88	49.5	+	+
9	VESA	800 x 600	72 Hz	48.08	50	+	+
10	MAC	832 x 624	75 Hz	49.72	57.283	-	-
11	VESA	1024 x 768	60 Hz	48.36	65	-	-
12	VESA	1024 x 768	70 Hz	56.48	75	-	-
13	VESA	1024 x 768	75 Hz	60.02	78.75	+	+
14	VESA	1280 x 1024	60 Hz	64	108	+	+
15	VESA	1280 x 1024	75 Hz	80	135	+	+
16	VESA	1152 x 864	75 Hz	67.5	108	+	+
17	VESA	1280 x 960	60 Hz	60	108	+	+

POWER SAVING

The monitor will be driven into “Power Saving” mode by the control signal from the display controller, as indicated by the amber-color power LED.

State	Power Consumption	LED Light
ON	Normal	Green
Active OFF	< 3 W	Amber

The power saving states will be kept until a control signal has been detected or the keyboard or mouse is activated. The recovery time from Active OFF state back to ON state is around 3 seconds.

DDC


To make your installation easier, the monitor is able to Plug and Play with your system if your system also supports DDC protocol. The DDC (Display Data Channel) is a communication protocol through which the monitor automatically informs the host system about its capabilities, for example, supported resolutions and corresponding timing. The monitor supports DDC2B standard.

INSTALLATION


To install the monitor to your host system, please follow the steps as given below:

Steps

1. Connect Video Cable
 - a. Make sure both the monitor and computer are powered-OFF.
 - b. Connect the video cable to the computer.
 - c. (only Dual-Input Model) Connect one end of the 24-pin DVI cable to the back of the monitor and connect the other end to the computer's port.)
2. Connect power cord
Connect the power cord to the monitor, then to a properly grounded AC outlet.
3. Connect the Audio Cable.
4. Power-ON Monitor and Computer
Power-ON the monitor first, then power-ON the computer.
This sequence is very important.
5. If the monitor still does not function properly, please refer to the troubleshooting section to diagnose the problem.

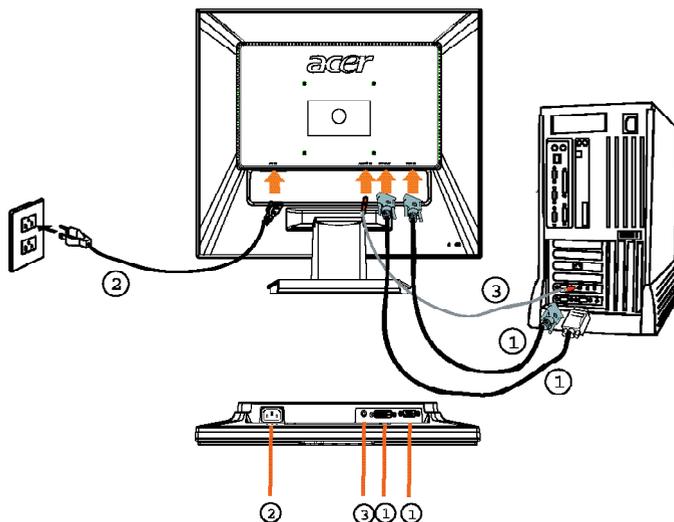

USER CONTROLS

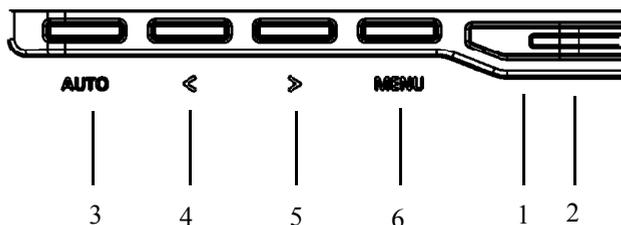

Front Panel Controls

1. Power Switch:

To turn ON or OFF the power.

2. Power LED:

Lights up to indicate the power is turned ON.

3. Auto Adjust button / Exit:

1) When OSD menu is in active status, this button will act as EXIT-KEY (EXIT OSD menu).

2) When OSD menu is in off status, press this button for 2 seconds to activate the Auto Adjustment function.

The Auto Adjustment function is used to set the HPos, VPos, Clock and Focus.

4. </Volume

Activates the volume control when the OSD is OFF or navigate through adjustment icons when OSD is ON or adjust a function when function is activated.

5. >/Volume

Activates the volume control when the OSD is OFF or navigate through adjustment icons when OSD is ON or adjust a function when function is activated.

6. MENU/ENTER:

Activate OSD menu when OSD is OFF or activate/de-activate adjustment function when OSD is ON or Exit OSD menu when in Volume Adjust OSD status.

HOW TO ADJUST A SETTING

1. Press the MENU-button to activate the OSD window.
2. Press < or > to select the desired function.
3. Press the MENU-button to select the function that you want to adjust.
4. Press < or > to change the settings of the current function.
5. To exit and save, select the exit function. If you want to adjust any other function, repeat steps 2-4.



ADJUSTING THE PICTURE

The descriptions for function control LEDs

Main Menu Icon	Sub Menu Icon	Sub Menu Item	Description
		Contrast	Adjusts the contrast between the foreground and background of the screen image.
		Brightness	Adjusts the background brightness of the screen image.
		Focus	Adjusts picture Focus. (available in Analog mode only)
		Clock	Adjusts picture Clock. (available in Analog mode only)

Main Menu Icon	Sub Menu Icon	Sub Menu Item	Description
		H. Position	Adjust the horizontal position. (available in Analog mode only)
		V. Position	Adjust the vertical position. (available in Analog mode only)
	N/A	Warm	Set the color temperature to warm white.
	N/A	Cool	Set the color temperature to cool white.
		User /Red	Adjusts Red/Green/Blue intensity.
		User/Green	
	User/Blue		
	N/A	English	Multi-language selection.
	N/A	繁體中文	
	N/A	Deutsch	
	N/A	Francais	
	N/A	Espanol	
	N/A	Italiano	
	N/A	简体中文	
	N/A	日本語	

Main Menu Icon	Sub Menu Icon	Sub Menu Item	Description
		H. Position	Adjust the horizontal position of the OSD.
		V. Position	Adjust the vertical position of the OSD.
		OSD Timeout	Adjust the OSD timeout.
 (Only Analog Input Model)	N/A	Auto Config	Auto Adjust the H/V Position, Focus and Clock of picture.
 (Only Dual Input Model)	N/A	Analog	Select input signal from analog (D-Sub)
	N/A	Digital	Select input signal from digital (DVI)
	N/A	Information	Show the resolution, H/V frequency and input port of current input timing.
	N/A	Reset	Clear each old status of Auto-configuration and set the color temperature to Cool.
	N/A	Exit	Save user adjustment and OSD disappear.

TROUBLESHOOTING

Before sending your LCD monitor for servicing, please check the troubleshooting list below to see if you can self-diagnose the problem.

Problems	Current Status	Remedy
No Picture	LED ON	<ul style="list-style-type: none"> Using OSD, adjust brightness and contrast to maximum or reset to their default settings.
	LED OFF	<ul style="list-style-type: none"> Check the power switch.
		<ul style="list-style-type: none"> Check if AC power cord is properly connected to the monitor.
LED displays amber color		<ul style="list-style-type: none"> Check if video signal cable is properly connected at the back of monitor.
		<ul style="list-style-type: none"> Check if the power of computer system is ON.
Abnormal Picture	Unstable Picture	<ul style="list-style-type: none"> Check if the specification of graphics adapter and monitor is in compliance which may be causing the input signal frequency mismatch.
	Display is missing, center shift, or too small or too large in display size	<ul style="list-style-type: none"> Using OSD, adjust RESOLUTION, CLOCK, CLOCK-PHASE, H-POSITION and V-POSITION with non-standard signals.
		<ul style="list-style-type: none"> Using OSD, in case of missing full-screen image, please select other resolution or other vertical refresh timing.
Abnormal Sound	No sound, or sound level is too low	<ul style="list-style-type: none"> Check the audio cable with the host PC is connected.
		<ul style="list-style-type: none"> Check if the volume setup of the host PC is in minimum position and try to raise the volume level.

SPECIFICATION

LCD Panel	Driving system	TFT Color LCD
	Size	48.26cm(19.0")
	Pixel pitch	0.294mm(H)x 0.294mm(V)
	Brightness	300cd/m ² (Typical)
	Contrast	700:1(Typical)
	Viewable angle	130° (H) 115° (V)
	Response time	8 ms (Typical)
	Video	R,G,B Analog Interface
	H-Frequency	30KHz - 81KHz
	V-Frequency	55-76Hz
Display Colors		16.7M Colors
Dot Clock		135MHz
Max. Resolution		1280 x 1024 @75Hz
Plug & Play		VESA DDC/DDC2B
EPA ENERGY STAR	ON Mode	≤ 50W
	OFF Mode	≤ 3W
Input Connector		D-Sub 15pin
		DVI-D 24pin (Only Dual-Input Model)
Input Video Signal		Analog:0.7Vp-p(standard), 75 OHM, Positive
		Digital signal (Only Dual-Input Model)
Maximum Screen Size		Horizontal : 376.32mm Vertical : 301.056mm
Power Source		100~240VAC,50~60Hz

Environmental Considerations		Operating Temp: 5 ^o to 35 ^o C Storage Temp.: -20 ^o to 60 ^o C Operating Humidity: 10% to 85%
Dimensions		411(W) x 410(H) x 181(D)mm
Weight (N. W.)		4kg Unit (net)
External Controls:	Switch	Auto Adjust Key >/ Volume </Volume Power Button MENU/ Exit
	Functions	Contrast Brightness Focus Clock H.Position V.Position Language Auto configuration (only Analog input model) Input signal Selection (only Dual input model) (Warm) Color (Cool) Color RGB Color temperature Reset OSD position . timeout Display information Exit
Power Consumption (Maximum)		50 Watts
Audio Output		Rated Power 1W (Per channel)
Regulatory Compliance		CUL, FCC, VCCI, CCC, MPR II, CE, TUV/GS, TCO'99, UL, ISO13406-2, PCT

* All specifications are subject to change without notice.