


## 30601-16 2lts Semi Flush Assembling Instruction(for pendant)

1. Unpack the carton and place the fixture on a flat surface. Attention: All necessary hardware and loose components have been verified for this fixture and are packed inside. Do not discard inner packing until you have inspected it thoroughly.
2. Thread the LOOP (A) onto the NIPPLE (B). Hang tightens until snug!
3. Put the CENTER COLUMN (F) onto the hook of the CANOPY ASSEMBLY(C).
4. Place GLASS (G) Into the GLASS FRAME (H).
5. With the help of another person to hang the bottom hook of HANGER (E) to the GLASS FRAME (H) then hang onto the SIDE HOOK (D) of the CANOPY ASSEMBLY (C).
6. Measure the height from hanging fixture to your ceiling. Cut the excess chain and wire to fit the height. Put the fixture onto the chain
7. Follow the wattage label on the fixture and install proper bulbs (not provided) onto the sockets.
8. For mounting and wiring step please follow the mounting instruction sheet enclosed.

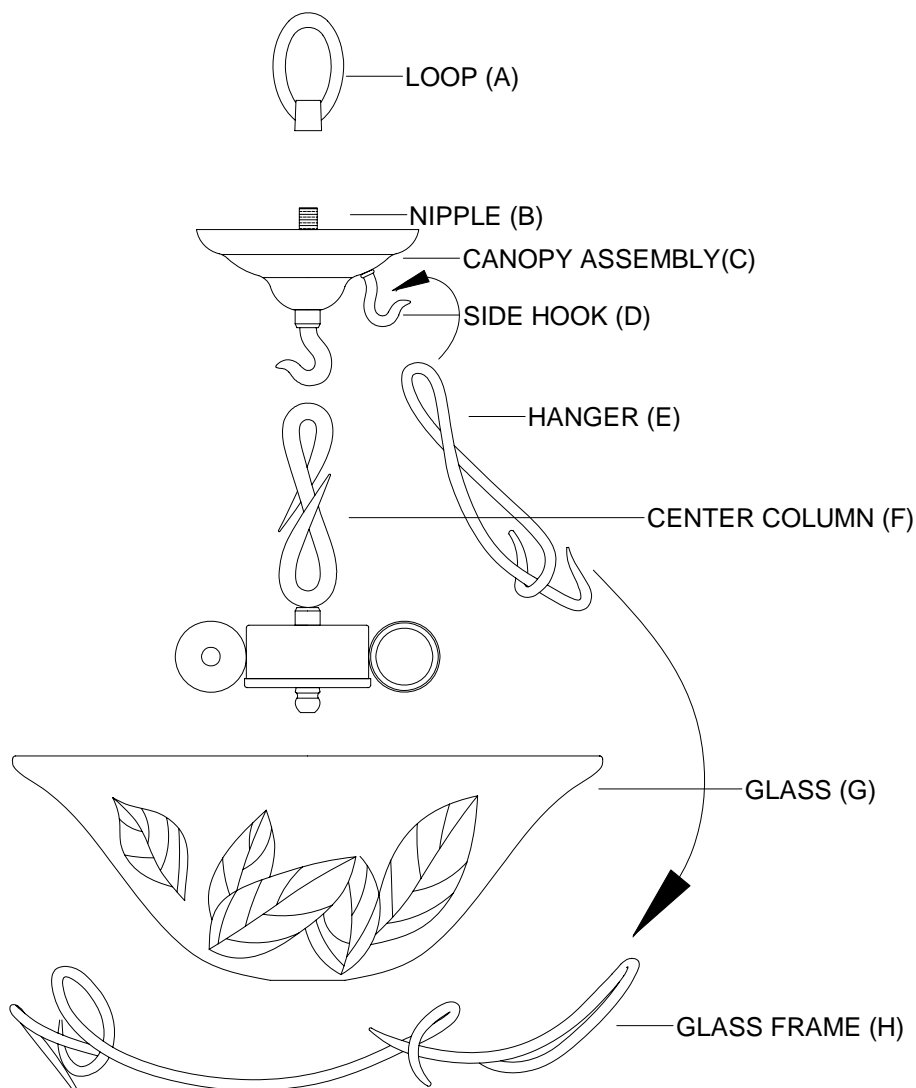

## 30601-16 2lts Semi Flush Assembling Instruction(for SEMI FLUSH)

1. Unpack the carton and place the fixture on a flat surface. Attention: All necessary hardware and loose components have been verified for this fixture and are packed inside. Do not discard inner packing until you have inspected it thoroughly.
2. Put the CENTER COLUMN (F) onto the hook of the CANOPY ASSEMBLY(C).
3. Place GLASS (G) Into the GLASS FRAME (H).
4. With the help of another person to hang the bottom hook of HANGER (E) to the GLASS FRAME (H) then hang onto the SIDE HOOK (D) of the CANOPY ASSEMBLY (C).
5. Follow the wattage label on the fixture and install proper bulbs (not provided) onto the sockets.
6. For mounting and wiring step please follow the mounting instruction sheet enclosed.

