


# Installation Instructions

## **CHANDLER™ APRON KITCHEN SINK** **MODEL 7048 SERIES**

**Thank you for selecting American-Standard...the benchmark of fine quality for over 100 years.**  
**To ensure that your installation proceeds smoothly--please read these instructions carefully before you begin.**



Certified to comply with ANSI Z124.6  
Patent Pending  
Observe local plumbing and building codes.

790759-100 REV A

**BEFORE YOU BEGIN...**Unpack new sink and inspect carefully for damage. Replace the sink in its original packing carton to protect it until you are ready to begin installation.

### **RECOMMENDED TOOLS & MATERIALS**

|               |                      |                         |                   |
|---------------|----------------------|-------------------------|-------------------|
| Putty Knife   | Phillips Screwdriver | Saber Saw               | Tubing Cutter     |
| Pipe Wrench   | Regular Screwdriver  | Plumbers' Putty or      | Tape Measure      |
| Channel Locks | Adjustable Wrench    | Caulking                | Hacksaw           |
| Drill         | Basin Wrench         | Various Carpentry Tools | Silicone Adhesive |

### **PRODUCT REQUIREMENTS**

Due to the special nature of this installation, American Standard recommends that an experienced cabinet maker build the new cabinet or modify an existing cabinet to achieve a satisfactory installation.

To ensure proper fit of the sink in the cabinet, we suggest you provide the cabinet maker with the actual sink that will be installed.


### **NOTES**

The cabinet designs illustrated below are intended as suggestions only. Your specific installation requirements may vary from those shown.

### **CABINET DESIGN**

The sink is designed to be installed with the apron exposed and the back of the apron flush against the front of the cabinet.


### **SINK DIMENSIONS**

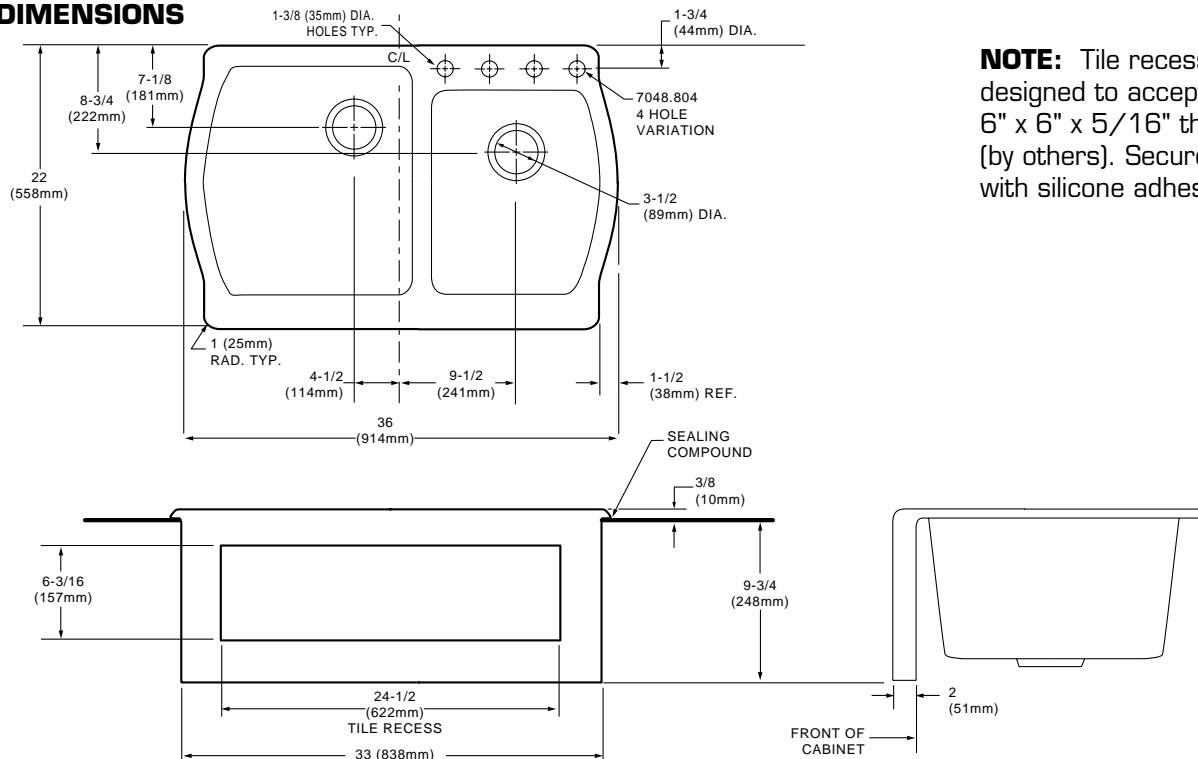

**NOTE:** Tile recess is designed to accept four 6" x 6" x 5/16" thick tiles (by others). Secure tiles with silicone adhesive.

# 1


## SINK INSTALLATION

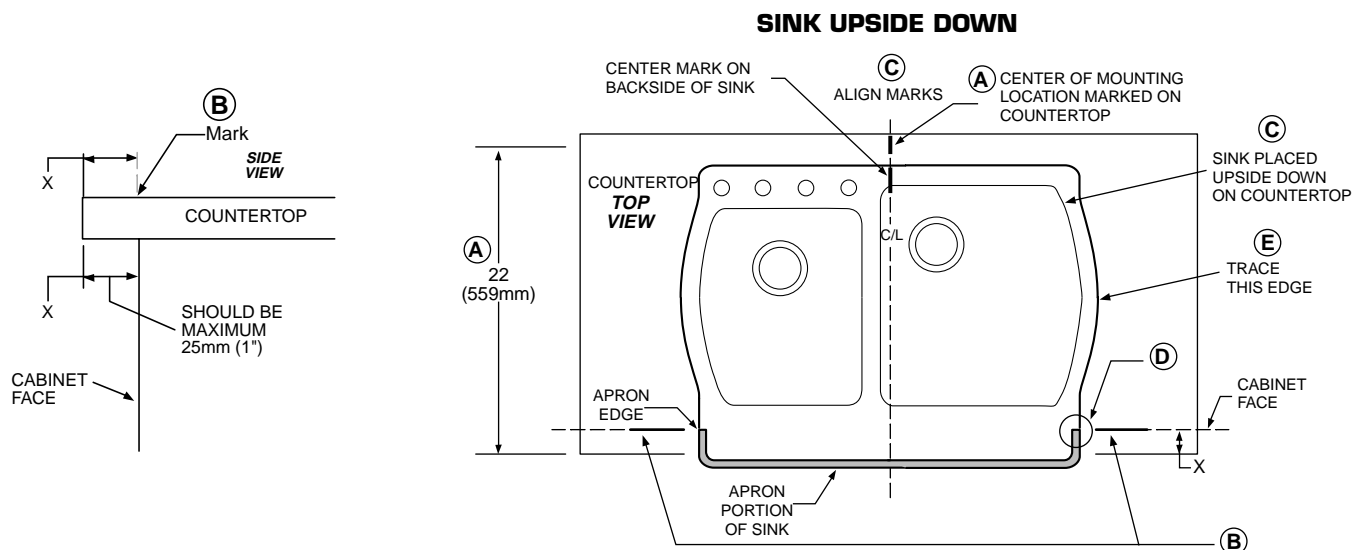

- Mark center of backside of sink. Mark center of location on counter top approx. 22in. from outside edge of countertop.
- Mark countertop to show the cabinet face location (dim. X) .
- Place sink, upside down, on countertop. Align centerline marks of sink and countertop.
- Align the apron edges with the cabinet face marks on countertop.
- Trace outside of sink (this is not the cut line.). Carefully remove sink, set aside.

# 1a



## SINK CUTOUT

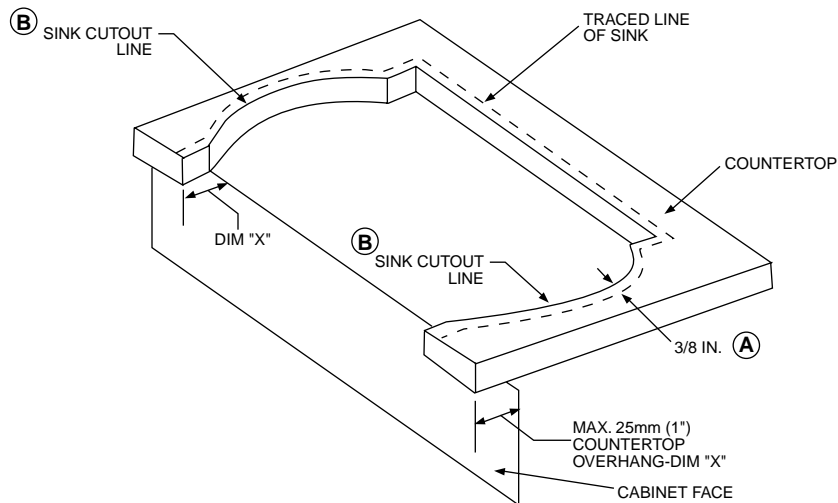

- Measure 3/8 in. inside of marked line - this is the sink cutout line.
- Cut out countertop.

# 1b


## COUNTERTOP NOTCH AND CABINET CUTOUT

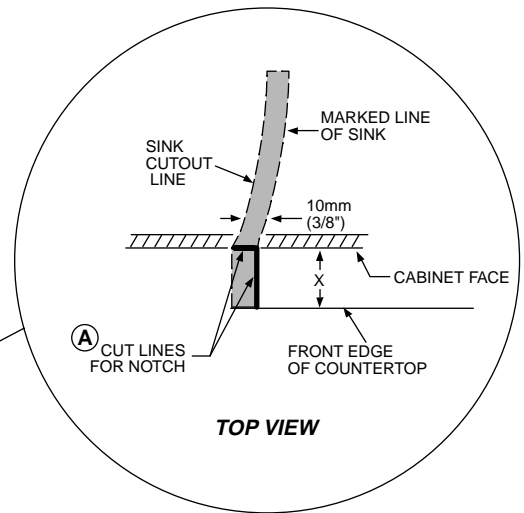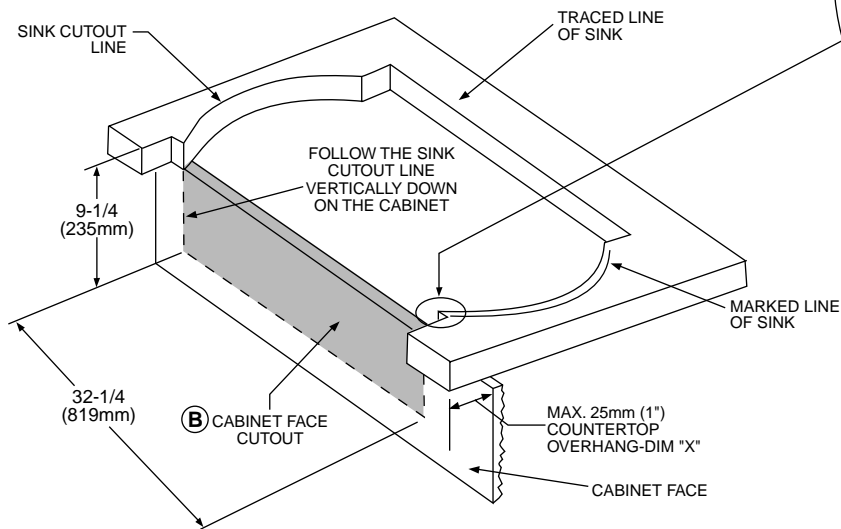

- A. The cut allows the apron portion of the sink to fit in the countertop.
- B. Cut the cabinet face per the diagram.
- C. Drop in sink and check fit. Be sure apron edges touch the cabinet face.


# 1C

## INSTALLED VIEW (after completing steps 2 thru 7)

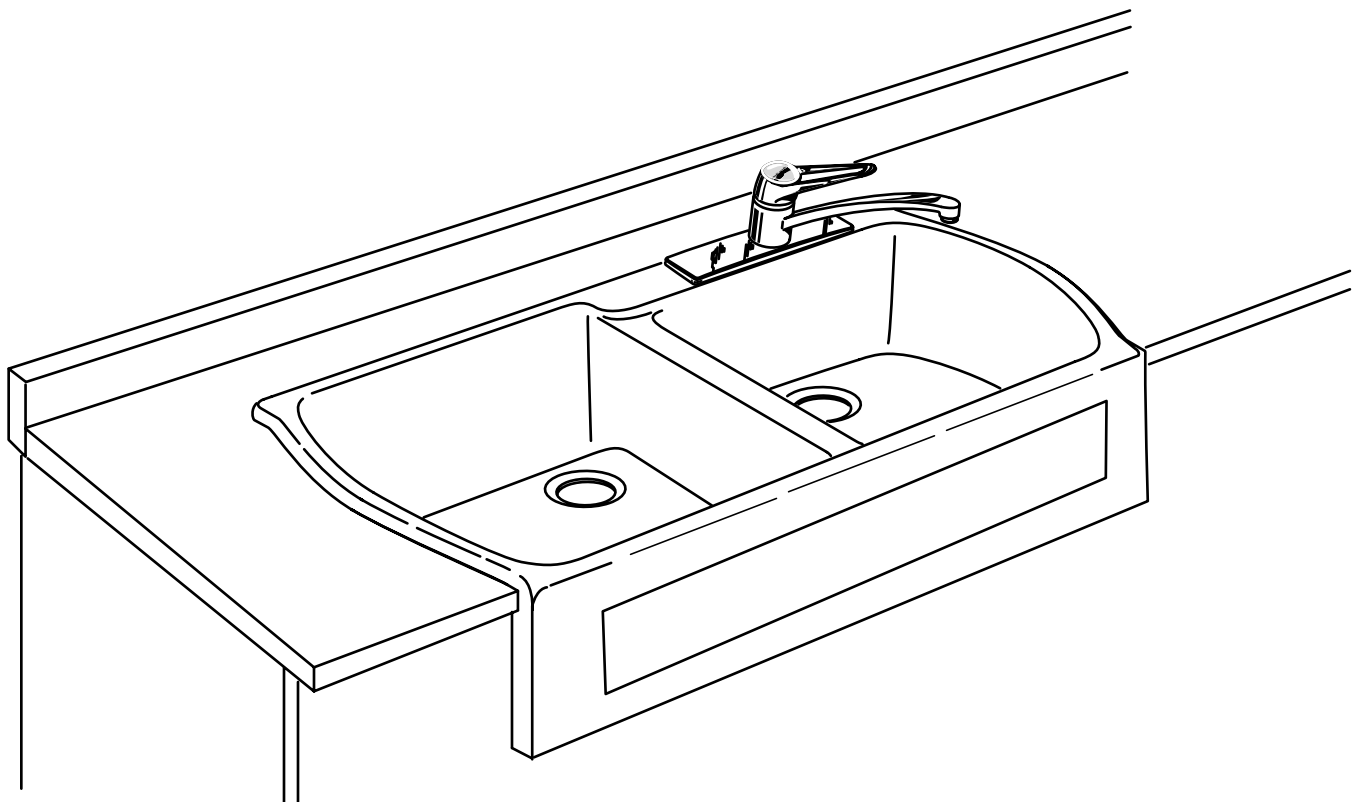


2

Mount the faucet and drain assembly on the sink following the manufacturer's instructions.




3

Before applying the sealant, place the sink temporarily into the cutout. Check for alignment and clearance, then trace around the outside edge of the sink as a guide for installation location and application of sealant. Remove sink.




4

Apply a masking tape outline 1/8" outside traced outline as a guide for application of silicone sealant.

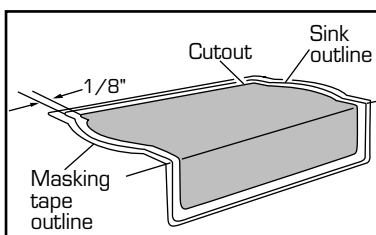


5

Apply a generous portion of silicone sealant inside line traced on countertop. Carefully lower sink into place and press down firmly. Use guidelines for proper positioning. Using water to dampen your finger, remove excess sealant for a smooth even line. Apply additional sealant if necessary to provide a uniform bead from the rim of sink to the masking tape line as shown. Carefully remove tape. Dampen finger and run it slightly over the sealant to remove any high spots.

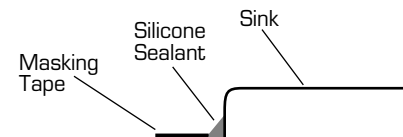


6

Connect supply lines to faucet finger tight, and carefully bend to engage with the supply stops. Tighten connections to faucet for secure seal.




7

Connect drain assembly hand tight to check alignment. It may be necessary to cut off part of the tailpiece (area "A") or part of the horizontal leg of the trap (area "B").



Secure joint for water-tight assembly.



Double Bowl

## AMERICAN STANDARD TEN-YEAR LIMITED WARRANTY CORIAN® SINK



If inspection of the Corian Sink of this American Standard product, within ten years after its initial purchase, confirms that it is defective in materials or workmanship, American Standard will repair or, at its option, exchange the product for a similar model.

This warranty applies only to the original purchaser and installation of these products. All labor and transportation costs or charges incidental to warranty service are to be borne by the original consumer-purchaser.

This limited warranty does not apply to local building code compliance. Since local building codes vary considerably, the purchaser of this product should check with a local building or plumbing contractor to insure local code compliance before installation.

This warranty shall be void if the product has been fabricated or modified in a manner inconsistent with the product as shipped by American-Standard; moved from its initial place of installation; if it has been subjected to faulty maintenance, abuse, misuse, accident or other damages; or if it was not installed in accordance with American Standard's instructions.

American Standard's option to repair or exchange the product under this warranty does not cover any labor or other costs of removal or installation, **nor shall American Standard be responsible for any other incidental or consequential damages attributable to a product defect or to the repair or exchange of a defective product, all of which are expressly excluded from this warranty.** (Some states or provinces do not allow the exclusion or limitation of implied warranties, so this exclusion may not apply to you.)

This warranty gives you specific legal rights. You may have other statutory rights that vary from state to state or from province to province, in which case this warranty does not affect such statutory rights.

### In the United States:

American Standard Inc.,  
P. O. Box 6820  
Piscataway, NJ 08855  
Attention: Director of Consumer Affairs

For residents of the United States,  
warranty information may also be  
obtained by calling the following  
toll free number: (800) 442-1902

### In Mexico:

Customer Service Manager  
Ideal Standard, S.A. de C.V.  
Via Morelos #330  
Col. Santa Clara  
Ecatepec 55540 Edo. Mexico

### In Canada:

American-Standard,  
1401 Dupont Street,  
Toronto, Ontario  
Canada M6H 2B1  
Toll free: (800) 387-0369

## Corian® Care & Maintenance Tips

| Cleaning             |                                                                                       |
|----------------------|---------------------------------------------------------------------------------------|
| Most dirt and stains | Use soapy water or ammonia-based cleaner.                                             |
| Water marks          | Wipe with damp cloth; towel dry.                                                      |
| Difficult stains     | Use an abrasive cleanser and a green Scotch-Brite® pad.                               |
| Disinfecting         | Occasionally wipe surface with diluted household bleach (1 part water/1 part bleach). |
| Maintenance          | Rub with Scotch-Brite® pad alone.                                                     |

\*Registered trademark of the 3M Company