

DESCRIPTION

New construction I.C. housing for Mini Accurus small aperture round trims. (ACM5001, ACM5002, ACM5003, ACM5004).

For use in insulated ceiling I.C. applications. Housing may be covered on all sides with insulation material.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A...Housing

Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable plaster frame can accommodate up to 1" ceiling thickness.

B...System Protection:

Thermal protection provided to guard against overheating and misuse of insulation over and around fixture.

C...Electrical

Integral j-box and metal halide ballast. 120V input. Junction box is U.L. listed for through branch wiring. Includes seven 1/2 trade size knockouts.

D...Lamp

CMH MR16 20W or 39W (not included). Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. GX10 twist-lock lamp socket.

E...Mounting


Hanger Bars included.

Ceiling Cut-Out: 3.63" dia.



MINI ACCURUS

ACM502ICMH
Insulated Ceiling
Air Tite
I.C. Housing
for Round Trim
FOR CMH MR16 20W or 39W

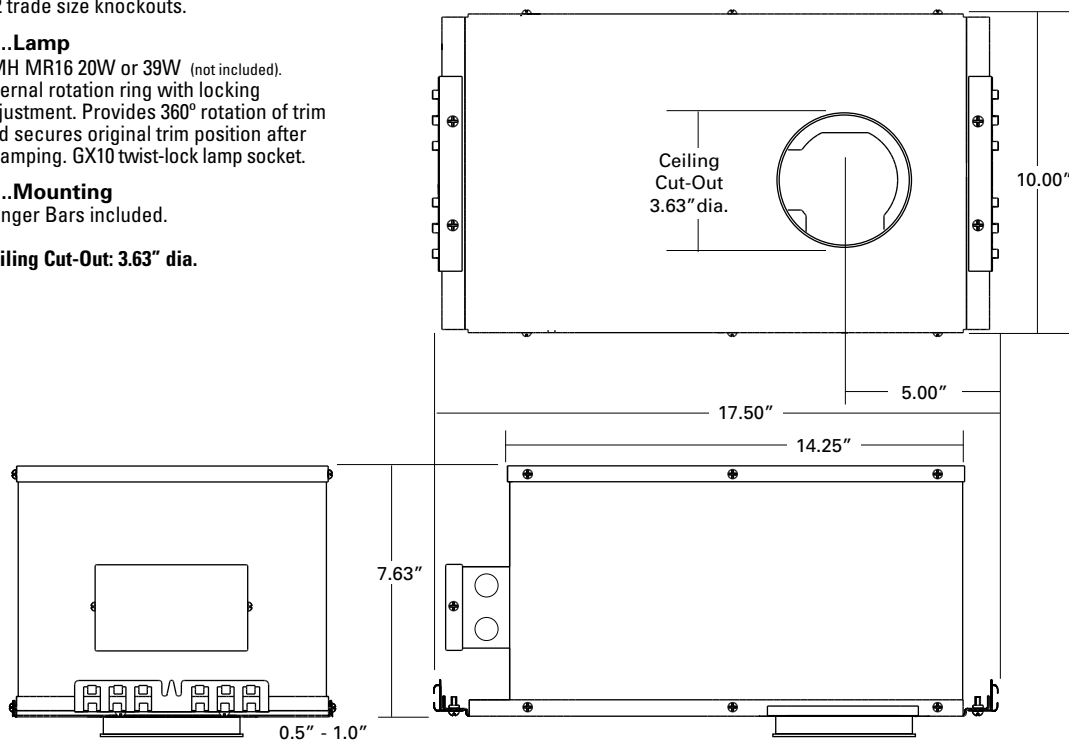

ORDERING INFORMATION

ACM502ICMH		
Housing ACM502ICMH = Mini Accurus I.C. Housing for Round Trim w/ Integral Ballast	Metal Halide Ballast 20 = CMH MR16 20W 39 = CMH MR16 39W	Voltage 120 = 120 volts primary 277 = 277 volts primary* * Consult factory for 277V ballast availability.