RECESSED PAR20MH **V TRIMLESS**

DESCRIPTION:

An adjustable PAR20MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

5 - PAR20MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Aromat® electronic metal halide ballsts in remote housing. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.




Catalog # Type

COMBOLIGHT® LV Series

FIVE (5) Light Recessed Next Generation Trimless Multi-Lamp Luminaire **PAR20 Metal Halide**

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	40.75"	7.09"	35.00"	5.30"	11.05"	40.75"	13.25″	38.20" x 8.50"

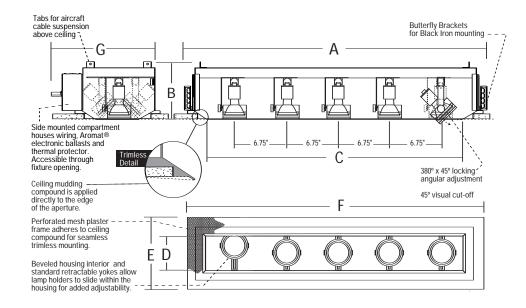

Includes Aromat® Electronic Metal Halide Ballasts

120 Volt



Other Adders

CC - Two Circuit

CP - Chicago Plenum

Lenses

ORDERING EXAMPLE: LV250MH WH 20 120 = Five Light Trimles

VIFLE.	LVZSOIVIII	0011	37	120	ш	optional ricos		
ss Rece	essed PAR20MH	I - White Inte	erior - 39 wat	t lamps -		\otimes	0	0
						Baffle	Snoots	Louvers

		Lamp Wattage	Voltage
nt Recessed Next Generation Trimless o Fixture	BK - Black	39 - 39 Watt PAR20MH	120 - 120 Volt (Standard)
DMH	WH - White		277 - 277 Volt
	S - Silver		
	PT - Custom (Specify)		
LV250MH			
(o Fixture	WH - White S - Silver PT - Custom (Specify)	WH - White S - Silver PT - Custom (Specify)



