

# MCGRAW-EDISON®



## BSC / BRC BOLLARD

**26 - 100W**

**Metal Halide  
High Pressure Sodium  
Compact Fluorescent  
Incandescent**


### PATHWAY LUMINAIRE

- Aluminum top provides rapid heat dissipation
- Impact-resistant clear acrylic lens measures 1/4" thick
- Lower dispersing reflector combines with truncated octagonal upper collecting reflector to provide low-glare, efficient illumination
- Seamless aluminum tube lifts off base for easy access to ballast. Finished in weather- and abrasion resistant polyester powder coat
- Quick-disconnect ballast located at housing base. Ballast assembly mounted on bracket and secured to base with two screws
- Rugged cast-aluminum base is completely sealed
- Medium-base porcelain socket
- Approximate net weight: 26 lbs. (12 kgs.)

### DESCRIPTION

The McGraw-Edison BSC / BRC Bollard, available in heights from 24" to 42", has crisp, clean lines which blend with any architectural setting. Constructed of seamless, heavy-duty aluminum and finished with tough polyester powder coat, the Bollard is gasketed to seal out external contaminants. U.L. 1598 listed and CSA certified for wet locations.

### DIMENSIONS

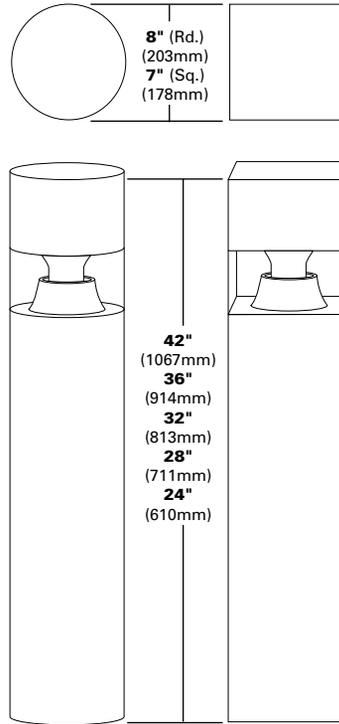

### ORDERING INFORMATION

**SAMPLE NUMBER:** BSC-36-100-MH-MT-BK

<b>Product Family</b> BSC=Square Bollard with Clear Lens, & Square Top BRC=Round Bollard with Clear Lens, & Cylindrical Top	<b>Fixture Height</b> 24=24" 28=28" 32=32" 36=36" 42=42"	<b>Lamp Wattage</b> <b>HID</b> <sup>1</sup> 35=35W <sup>2</sup> 50=50W 70=70W 100=100W 150=150W 175=175W <b>Compact Fluorescent</b> <sup>3</sup> 26=26W 32=32W 42=42W	<b>Lamp Type</b> MH=Metal Halide HPS=High Pressure Sodium CF=Compact Fluorescent <sup>4</sup> IC=Incandescent	<b>Voltage</b> <sup>5</sup> 120=120V 208=208V 240=240V 277=277V MT=Multi-Tap <sup>6</sup> TT=Triple-Tap <sup>7</sup> UNV=Universal 120-277V <sup>3</sup>	<b>Color</b> <sup>8</sup> BK=Black AP=Grey BZ=Bronze WH=White DP=Dark Platinum GM=Graphite Metallic	<b>Options &amp; Accessories</b> (See Below)
---	---	--	---	---	---	---

#### Options<sup>9</sup>

- F=Single Fuse (120, 277 or 347V)
- FF=Double Fused (208 or 240V)
- R1=Provisional Cut for GFI Receptacle<sup>10</sup>
- R2=Installed GFI Receptacle<sup>10</sup>
- PL=Polycarbonate Lens<sup>11</sup>
- CF/EM=Emergency Battery Pack<sup>12</sup>
- L=Lamp Included<sup>13</sup>

**NOTES:** 1 All lamps are medium-base. 2 35W HPS available in 120V only. 3 Compact Fluorescent only Electronic ballast universal voltage 120-277V. 4 Nominal length not to exceed 7". 5 Product also available in non-US voltages and 50Hz for international markets. Consult factory for availability and ordering information. 6 Multi-Tap ballast is 120/208/240/277V wired 277V. 7 Triple-Tap ballast is 120/277/347V wired 347V. 8 Other finish colors available, including a full line of RAL color matches. Consult your Cooper Lighting Representative. 9 Add as suffix in the order shown. 10 Location of R1 and R2 option on housing subject to height of luminaire. 11 Available with BSC only. 12 CF lamps only, rated minimum operating temperature 32° F (0° C). 13 Coated lamp standard. Must specify clear lamp if desired. 14 Specifications and dimensions subject to change without notice.