




The Model 9133i is an advanced, fully featured multi-line IP Telephone that takes full advantage of VoIP technology by offering a flexible, interoperable solution at an affordable price.

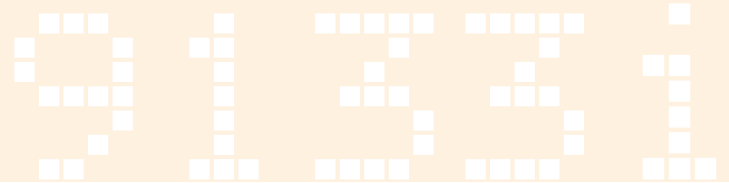

Model 9133i IP Telephone

Key Features:

- **Enhanced Call Management** — Large storage for personal directory, callers log, and redial list
- **Tight Integration** — Support for multiple IP telephony systems including BroadWorks®, Nortel, Sylanro, and Asterisk SIP
- **Multiple Line/Call Appearance Lights** — Support up to 10 simultaneous calls. Juggle multiple calls easily with a single press of a button
- **Shared Call Appearances** — Shared calls allow you to place a call on hold at one set and pick it up easily at another set
- **Remarkable Audio** — Quality speakerphone with excellent voice clarity and delivery
- **Protect Your Investments** — Firmware upgrades can be downloaded and installed in the field as standards develop and protocols evolve
- **Less Wiring** — Built in dual 10/100 switched Ethernet ports let you share a connection with your computer. Inline power support eliminates the need for a power adapter



Building success with the business telephone leader

VIEW AASTRA TELECOM'S PHONES ON THE INTERNET AT WWW.AASTRA.COM

Technical specifications

Physical

- » 20.2 cm W x 19.5 cm D x 8.0 cm H (8.0"W x 7.7"D x 3.2"H)
- » 842 g (29.7 oz)

Power

- » AC wall adapter included
- » Compatible with IEEE 802.3af inline power device
- » Optional Power Over Ethernet (POE) injector available, but not provided, for networks that do not supply power

Handset / Headset

- » Modular RJ9 headset connector, compatible with amplified business headsets
- » Hearing aid compatible handset
- » Quality speakerphone

Display

- » 3 line adjustable backlit display

Feature Keys

- » 3 call appearance lines
- » 4 navigational keys
- » 7 programmable keys
- » 10 predefined hard keys including Conference, Call Transfer, Redial, Options, Directory, Save, Delete, Speaker/Headset, Mute

Networking

- » Dual 10/100 Mbps switched Ethernet ports
- » Manual or Dynamic Host Configuration Protocol (DHCP) IP address setup
- » Time and date synchronization using SNTP
- » Built-in HTTP server for web administration and maintenance
- » Server provisioned user configuration files

Protocols / Codecs

- » IETF SIP (RFC3261)
- » G.711 μ -law / A-law
- » G.729

Feature Highlights*

- » 3 call appearance lines plus up to 7 additional call appearance lines using programmable keys
- » Personal directory
- » Call forward
- » Call transfer
- » Call waiting
- » Caller and calling line information
- » Callers log
- » Conference
- » Redial list
- » Live dial pad or pre-dial support
- » Broadsoft's BroadWorks enhanced SIP – supports Intercom, Shared Call Appearances, CommPilot Call Manager
- » Nortel's MCS SIP support – Conferencing, Voicemail, and NAT Traversal support

Package Contents

- » 9133i IP Telephone
- » Desk Stand
- » AC wall adapter
- » Quick Installation Guide
- » Network Cable

* Feature availability dependent on IP telephony system

THIRD-PARTY INTEROPERABILITY	480i CT	480i	9133i	9112i
SPHERE COMMUNICATIONS - SPHERICALL MGCP		⌘		
BROADSOFT® - BROADWORKS SIP (RELEASE 11.1)	⌘ ¹	⌘	⌘ ¹	⌘ ¹
NORTEL NETWORKS - MCS 5100 & 5200	⌘ ¹	⌘ ¹	⌘ ¹	⌘ ¹
SYLANTRO – SIP (VERSION 3.0.2)	⌘ ¹	⌘ ¹	⌘ ¹	⌘ ¹
ASTERISK	⌘ ²	⌘ ²	⌘ ²	⌘ ²

¹ Currently undergoing certification – Q2 2005

² Field tested

AASTRA
Telecom

06/05

For more information, contact your Aastra Telecom representative, or call + 44 1708 731331

COPYRIGHT (C) 2005 AASTRA TELECOM. ALL RIGHTS RESERVED. INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. AASTRA TELECOM ASSUMES NO RESPONSIBILITY FOR ANY ERRORS THAT MAY APPEAR IN THIS DOCUMENT. PRODUCT CAPABILITIES DESCRIBED IN THIS DOCUMENT PERTAIN SOLELY TO AASTRA TELECOM'S MARKETING ACTIVITIES IN THE U.S AND CANADA. AVAILABILITY IN OTHER MARKETS MAY VARY.