


Revolabs Single Channel System - Polycom IP 7000 Setup Guide

NOTES AND CAUTIONS:

This setup guide will guide you through the steps needed to properly connect a Revolabs Single Channel System to a Polycom IP 7000 speakerphone.

1. Connecting the Cables
2. Configuring the IP 7000 speakerphone

The Cisco 7937G is a variant of the Polycom IP 7000 and has the same programming instructions.

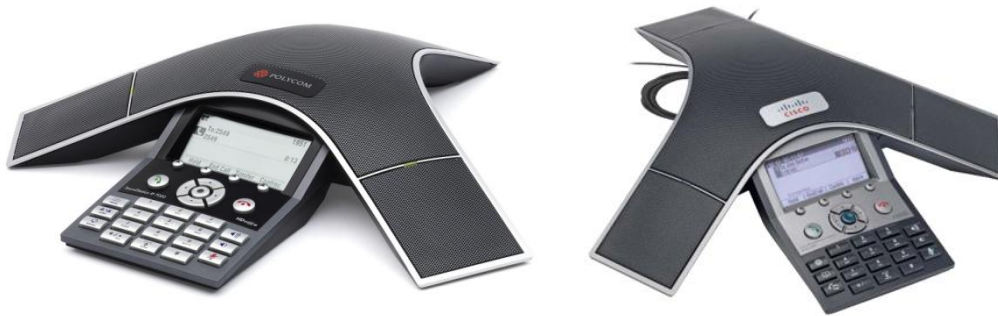

Note: *It is important to carefully follow these instructions in order and completely. Otherwise your Single Channel System and/or the phone may not function properly. Please read through these instructions completely before proceeding. Contact Revolabs technical support if you have any questions.*


Requirements for connecting systems:

1. Revolabs Single Channel System
2. Polycom IP 7000 speakerphone
3. Polycom SoundStation IP Multi Interface Module (P/N 2200-19300-001)

Connecting the Cables

CONNECTING A REVOLABS SINGLE CHANNEL TO THE POLYCOM IP 7000 SPEAKERPHONE

1. Connect the Single Channel System to the SoundStation IP 7000 the left "Audio In" port on the Multi Interface Module using the Revolabs 2.5mm to RCA cable

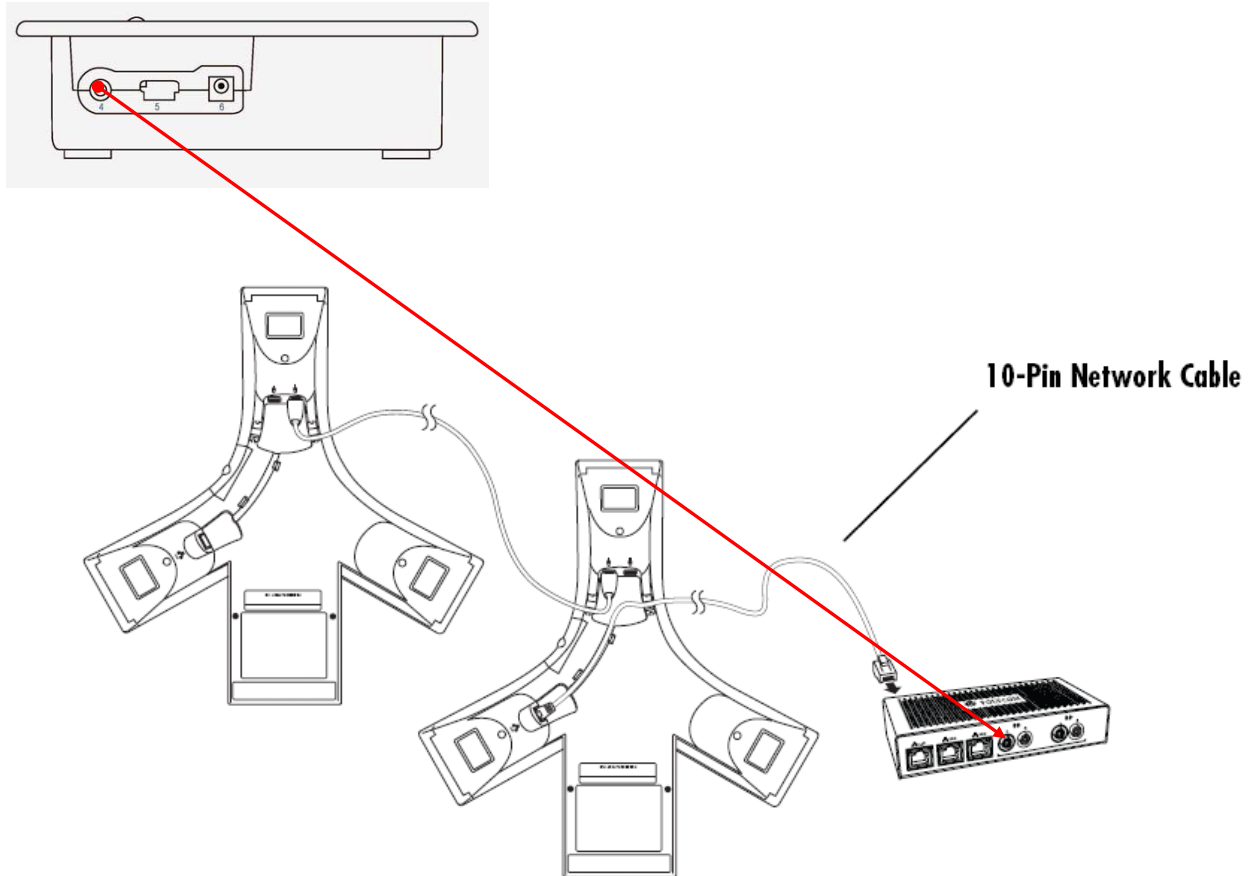

Configuring the IP 7000 Speakerphone

CONFIGURING THE AUDIO MENUS OF THE IP 7000 SPEAKERPHONE

1. Press the MENU button
2. Scroll down to SETTINGS (3)
3. Select BASIC (1)
4. Scroll down to AUDIO (5)
5. Select AUXILIARY AUDIO (2)
6. Select AUX AUDIO IN (1)
7. Verify that OTHER INPUT (2) is active

