



AR-7VH WITH CURVED DOOR

AR-7VH WITH FLAT DOOR



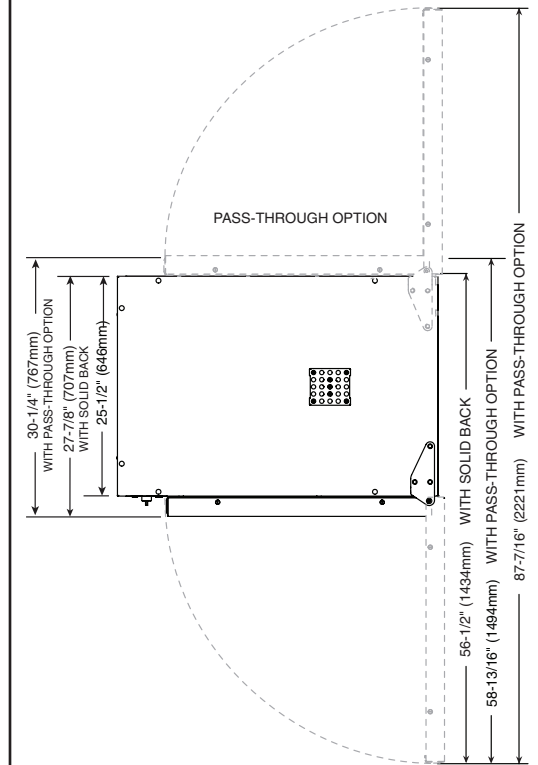


AR-7VH VENTLESS HOOD
INSTALLED DIRECTLY ON THE TOP OF
ELECTRIC ROTISSERIE MODEL AR-7E

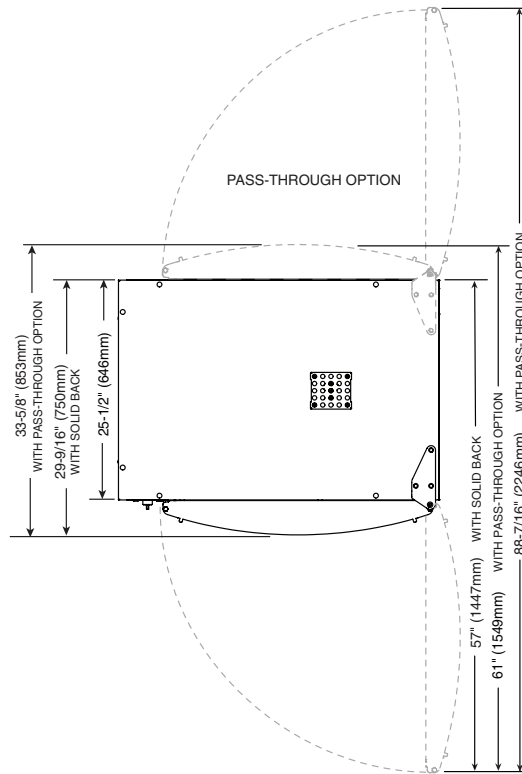

LISTED
COOKING APPLIANCE
WITH INTEGRAL SYSTEMS
FOR LIMITING THE EMISSION
OF GREASE LADEN AIR
1P35

ALSO CLASSIFIED BY
UNDERWRITERS
LABORATORIES INC.®
IN ACCORDANCE WITH
NSF4 - 2002

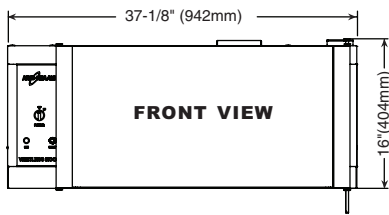

DIMENSIONS: H x W x D				
FLAT GLASS		CURVED GLASS		
EXTERIOR: 16" x 37-1/8" x 27-7/8" (404mm x 942mm x 707mm)		PASS-THROUGH EXTERIOR: (OPTION) 16" x 37-1/8" x 30-1/4" (404mm x 942mm x 767mm)	EXTERIOR: 16" x 37-1/8" x 29-9/16" (404mm x 942mm x 750mm)	PASS-THROUGH EXTERIOR: (OPTION) 16" x 37-1/8" x 33-5/8" (404mm x 942mm x 853mm)
ELECTRICAL				
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW
208-240	1	50/60	1.0	.2
INSTALLATION REQUIREMENTS				
FACTORY INSTALLATION ONLY				
The ventless hood must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions. (NOT AVAILABLE ON TWO STACKED ROTISSERIES)				
OPTIONS & ACCESSORIES				
Replacement Filters				
<input type="checkbox"/> Grease Filter				FI-25867
<input type="checkbox"/> Charcoal Filter				FI-25866
AIR MOVEMENT				
530 cfm (15m ³)				
CLEARANCE REQUIREMENTS				
6" (152mm) at top, back and both sides				
WEIGHT				
NET:		120 lb (54 kg)		
SHIP:		175 lb (79 kg) ADDITIONAL SHIP WEIGHT		
FACTORY INSTALLED OVER AR-7E ROTISSERIE				
CRATE DIMENSIONS: (H x W x D)		62" x 50" x 45" EST. (1575mm x 1270mm x 1143mm)		