

Stand-Alone Proximity Reader

PR-112S-A

The ENFORCER Stand-Alone Proximity Reader provides a flexible solution for controlled access. The stylish case and small size make it ideal for use in offices, homes and apartments. The wave-shaped tri-color LED status bar accents the case design. Simple installation, quick programming, and high reliability are combined in the PR-112S-A Stand-Alone Proximity Reader.




10 cards included
Model #: PR-K1S1-A

Features:

- ▶ Sealed and weatherproof (IP67).
- ▶ Tri-color wave-shaped LED status bar indicates proximity reader's mode and status.
 - Blue On/Valid Card Indicator
 - Green Programming Mode
 - Red Invalid Card
- ▶ Output relay for either time (1 to 180 seconds) or "Toggle" mode.
- ▶ Egress input for easy exiting.
- ▶ Buzzer for audible confirmation or silent mode (programmable).
- ▶ Up to 100 user cards can be programmed.
- ▶ User cards easily deleted. Delete a single card, or all cards.
- ▶ Up to 5 "Master" cards can be programmed.
- ▶ 10 Cards included.
(additional cards available, Model # PR-K1S1-A)

Dimensions:

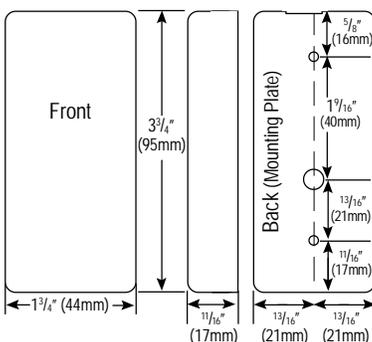

Wire Coding:

RED -- (+) 12VDC
 BLACK -- (-) GND
 BLUE -- Egress Input
 YELLOW -- N.C.
 GRAY -- N.O.
 BROWN -- COM

Technical Specifications:

	PR-112S-A
Power Input	12VDC
Current Draw	Standby: 80mA @ 12VDC Active: 200mA @ 12VDC
Max. Read Distance	6" (15cm)
User Card Limit	100 cards
Master Card Limit	5 Cards
Transmit Frequency	125Khz
Outputs	1 Relay (Com, N.O., N.C.)
Contact Rating	1A @ 30V
Relay Time Delay	1-180 secs. / Toggle Mode
Temperature	-4°-158°F (-20°-70°C)
Enclosure Rating	IP67
Dimensions	3 11/16" x 1 3/4" x 5/8" (95 x 44 x 17 mm)