

### Overview

#### What's New


- Dual optical drive support with one fixed drive and one modular bay drive
- Mobile Intel® Pentium® III 1.2 GHz-M, 1.13 GHz-M, or 1.06 GHz-M processor with enhanced SpeedStep™ technology
- Digital Video Editing Port 1394
- Easy Access Internet Buttons

#### At A Glance

- Weighs only 7.6 lb/3.4 kg
- 1.6 in/4.1 cm thin
- 15-inch XGA TFT display
- 128 or 256-MB SDRAM (133 MHz) standard, upgradeable to 1024 MB
- Integrated mini PCI 56K V.92 modem plus 10/100 NIC
- Complete set of system ports including two USB port expansion options, 1394 Digital Video Input
- Full-size keyboard
- Microsoft® Windows® XP Pro or Windows 2000 Professional preinstalled
- Protected by a One-Year, Worldwide Limited Warranty — certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.

#### What's Special

- Modular Bay which enables simultaneous use of up to two optical drives, supports a second battery, or floppy drive
- Magnesium display enclosure

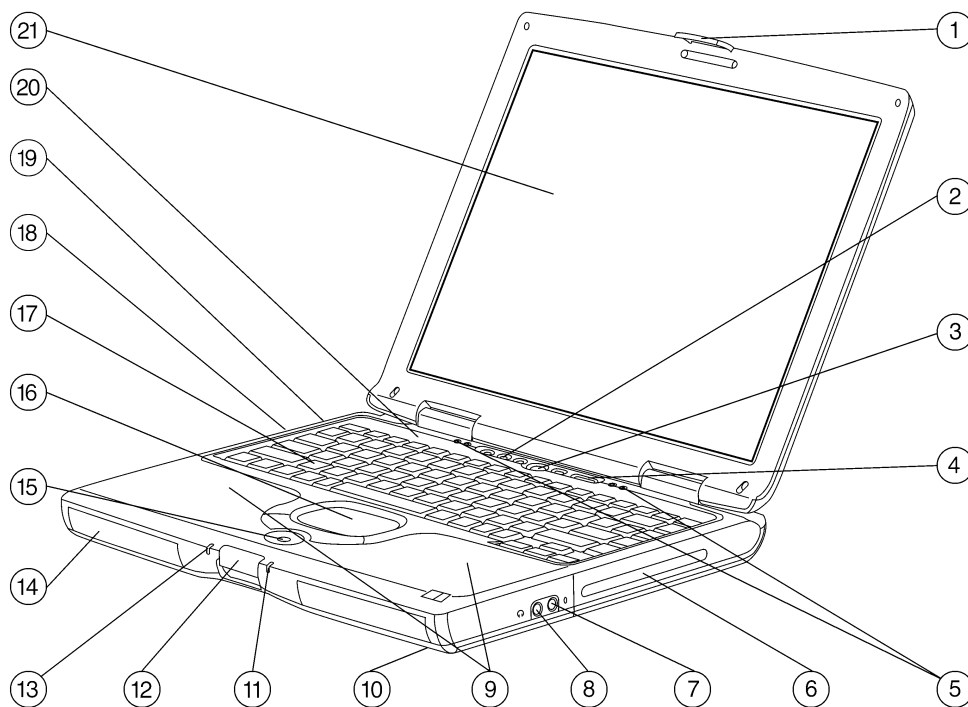

- |   |                                  |
|---|----------------------------------|
| 1. Display Release Tab                            | 11. Battery Light                |
| 2. Easy Access Buttons                            | 12. Display Release Latch        |
| 3. Power Switch                                   | 13. AC Power Light / Standby     |
| 4. Volume Control                                 | 14. Stereo Speakers              |
| 5. Status LEDs (AC, Caps-, Num-, Scroll- Lock)    | 15. 4-Way Internet Scroll Button |
| 6. Modular Bay Floppy Diskette Drive              | 16. Touch Pad                    |
| 7. Microphone Jack                                | 17. Keyboard                     |
| 8. Headphone Jack                                 | 18. Fixed Optical Drive          |
| 9. Soft Touch Palm Rests                          | 19. Security Lock Slot           |
| 10. Primary Hard Drive and Battery under the unit | 20. Lid Switch                   |
|   | 21. TFT Color Display            |

### Standard Features

---

<b>Panel and Processor</b>	15-inch TFT XGA display with 1024 x 768 resolution up to 16M colors 1.2 GHz-M on Mobile Intel Pentium III processor with 512-KB L2 cache, or 1.13 GHz-M on Mobile Intel Pentium III processor with 512-KB L2 cache, or 1.06 GHz-M on Mobile Intel Pentium III processor with 512-KB L2 cache <b>NOTE:</b> Mobile Intel Pentium III-M processors support enhanced Intel SpeedStep technology.
<b>Memory</b>	Standard            256-MB (133 MHz) SDRAM Maximum            1024-MB (133 MHz) SDRAM <b>NOTE:</b> Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only Compaq branded memory modules to ensure compatibility.
<b>Communications</b>	Type III Mini PCI 56K (V.92) modem plus integrated 10/100 NIC <b>NOTE:</b> Designed only to allow faster downloads from V.90 compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. <b>NOTE:</b> Communication availability is subject to country regulatory approval.
<b>Keyboard</b>	Full-size desktop-compatible keyboard; special feature hotkeys for instant access to toggling between internal and external displays, or simultaneous displays and brightness Oversized keys and separate cursor control keys (88 keys) – 101-key compatible Windows Key SoftTouch Palm Rest provides a more comfortable feel.
<b>Easy Access Internet Buttons</b>	The <i>Evo™</i> Notebook N180 comes with four Easy Access Buttons designed to increase customer productivity by providing one-touch access to helpful Compaq information, favorite Internet destinations, files, or applications.
<b>Pointing Device</b>	TouchPad
<b>PC Card Slots</b>	One (1) Type II PC Card Slot that supports both 32-bit CardBus (Full support in Microsoft Windows 9.x and Windows 2000) and 16-bit PCMCIA Cards One (1) Type I/II PC Card slot with support for 32-bit Card bus
<b>Storage</b>	Diskette Drives            1.44-MB diskette drive (model dependant) Fixed Optical Drives        DVD-ROM drive Modular Bay Drive        1.44-MB Floppy drive or CD-RW drive (model dependant) Hard Drive                30 GB or 20 GB (model dependant)
<b>Multimedia</b>	JBL Pro speakers for enhanced stereo audio Integrated 16-bit Sound Blaster Pro-compatible stereo audio Integrated speaker External volume controls Headphone-out Microphone in Software MPEG1 support DVD movie playback software DVD-ROM drive with DVD movie playback 4X AGP graphics 16 or 32-MB SDRAM (model dependant)

---

### Standard Features

---

<b>Interfaces</b>	PC Card Slot	1 Type I, II
	USB 1.1 Connectors	2
	Digital Video Port 1394	1
	Parallel SPP/ECP standard interface; (DB25 connector)	1
	PS/2 Style Mouse or Keyboard port	1
	RJ-45 Ethernet jack	1
	RJ-11 modem jack	1
	Audio ports (headphone/speaker out, microphone-in)	2
	S-Video TV-Out	1
	External VGA monitor port	1
	QuikDock connector	1

---

<b>Graphics</b>	ATI Mobility Radeon M6 with 16 or 32-MB SDRAM (model dependant) ATI Mobility Radeon M6 graphics processor includes hardware accelerated 3D graphics for enhanced DVD playback and 3D performance
-----------------	---

---

<b>Display (External)</b>	Up to 32-bit per pixel color depth Supports 1024 x 768 resolutions up to 100-Hz refresh rate, depending on monitor capability, resolution and color depth settings
---------------------------	---

---

<b>Display (Internal)</b>	15-inch TFT XGA display with 1024 x 768 resolution up to 16.7M colors
---------------------------	---

---

<b>Operating System</b>	Microsoft Windows XP Professional preinstalled, or Microsoft Windows 2000 Professional preinstalled
-------------------------	--

---

<b>Software</b>	Online Safety and Comfort Guide Online User's Guide Norton Anti Virus 2001 Pinnacle Studio SW DVD Playback SW
-----------------	---

---

<b>System Recovery</b>	Each unit is shipped with a CD kit for quick recovery (erases hard disk and restores manufacturer-installed image) and software recovery (installs only selected standard software)
------------------------	---

---

---

### Standard Features


---

<b>Security</b>	Cable lock support Power-On Password Supervisor Password
<b>Power Supply</b>	External AC Adapter; 6-foot/18.2-meter power cord included
<b>Battery</b>	<p>The <i>Evo</i> Notebook N180 8-cell Lithium-Ion battery provides up to four hours of battery life; up to six hours achieved using optional additional Modular Bay battery.</p> <p><b>NOTE:</b> Actual results may vary with product model, configuration, and individual usage. Compaq results of 4:05 (hr:min) were achieved running the eTesting Labs Inc.'s BatteryMark™ Test version 4.0.1 on an N180 with an Intel Pentium III-M 1 GHz CPU, 15-inch XGA panel, 128-MB RAM, 20-GB HDD, CD, 8-cell Lithium-Ion battery, and NIC/modem. System parameters were set according to eTesting Labs' recommendations: panel brightness 50%, hard drive standby and video idle time three minutes, Intel SpeedStep battery optimized mode.</p> <p><b>NOTE:</b> This test was performed without independent verification by eTesting Labs Inc. eTesting Labs Inc. makes no representations or warranties as to the result of the test. BatteryMark is a trademark of Ziff Davis Publishing Holdings Inc., and affiliate of eTesting Labs Inc., in the U.S. and other countries. Battery charge time about two hours when unit turned off.</p>
<b>Power Conservation</b>	Intel SpeedStep technology (allows a Battery Optimized Mode where CPU draws 50% of normal power yet affords 70 to 80% of maximum PIII processing speed) Hibernation Instant-on through Standby Pop-ups with three presets One custom level of power conservation ACPI compliant
<b>Modular Bay</b>	Modular Bay devices may be swapped with the system powered on (hot) or in suspend mode (warm) under any supported operating system.
<b>Service and Support</b>	Compaq Services includes a One-Year Limited Warranty, whole-unit replacement through second business day, pickup and delivery. (Eligibility depends on geographic location.) Optional services include a One-Year Warranty Extension. Certain restrictions and exclusions apply. See the Limited Warranty Statement for details.

## Standard Features

### Naming Convention

The Etymology of a Model name:

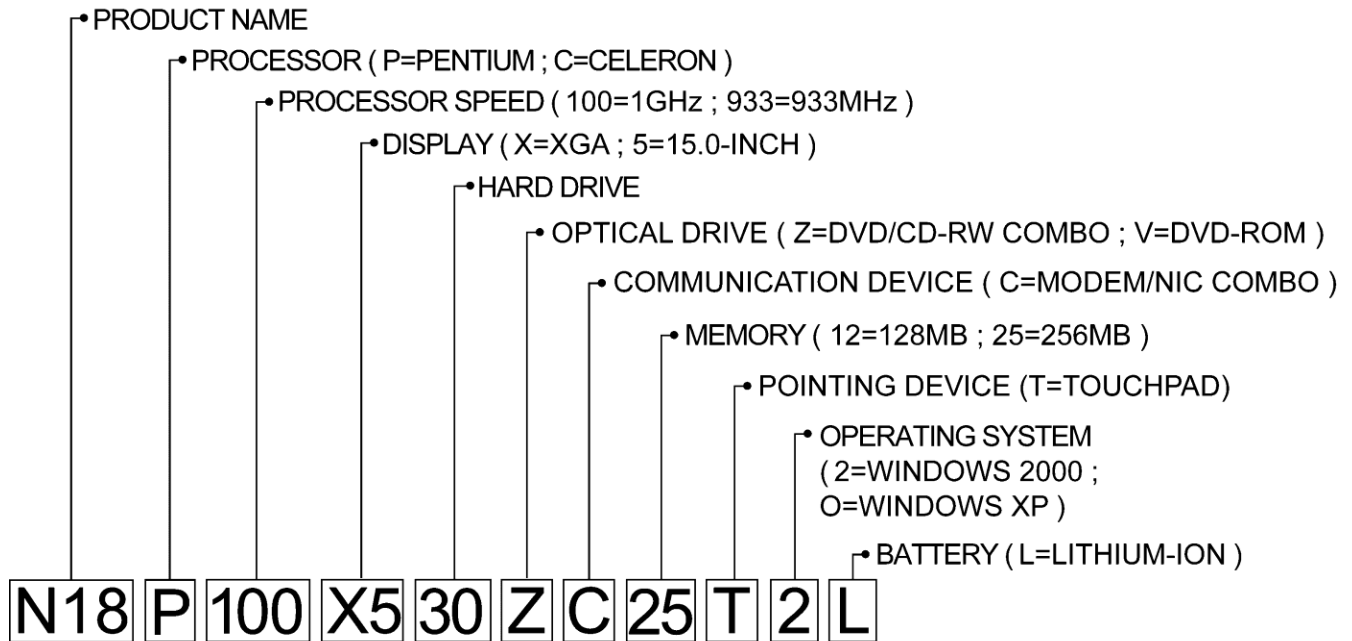

### Standard Features

#### MODELS

---

N18P113X520VC25TOL	<b>Display</b>	15-inch color TFT XGA	
	<b>Processor</b>	Mobile Intel Pentium III 1.13 GHz-M	
	<b>Cache Memory</b>	512-KB, L2 Cache	
	<b>Memory</b>	Standard 256-MB SDRAM Maximum 1024-MB SDRAM	
	<b>Fixed Optical Drive</b>	DVD-ROM drive	
	<b>Modular Bay</b>	Floppy drive	
	<b>Hard Drive</b>	20-GB	
	<b>Modem</b>	Type III Mini PCI 56K (V.92) modem plus integrated 10/100 NIC	
	<b>Graphics</b>	ATI Mobility Radeon M6-P graphics controller 4x AGP and 16-MB DDR SDRAM	
	<b>Audio</b>	JBL Pro speakers	
	<b>Operating System</b>	Microsoft Windows XP Professional	
	<hr/>		
	N18P120X530ZC25TOL	<b>Display</b>	15-inch color TFT XGA
<b>Processor</b>		Mobile Intel Pentium III 1.2 GHz-M	
<b>Cache Memory</b>		512-KB, L2 Cache	
<b>Memory</b>		Standard 256-MB SDRAM Maximum 1024-MB SDRAM	
<b>Fixed Optical Drive</b>		DVD-ROM drive	
<b>Modular Bay</b>		CD-RW drive	
<b>Hard Drive</b>		30-GB	
<b>Modem</b>		Type III Mini PCI 56K (V.92) modem plus integrated 10/100 NIC	
<b>Graphics</b>		ATI Mobility Radeon M6-P graphics controller 4x AGP and 32-MB DDR SDRAM	
<b>Audio</b>		JBL Pro speakers	
<b>Operating System</b>		Microsoft Windows XP Professional	

## Standard Features

### MODELS

			Pentium III 1.13 GHz-M 15-inch XGA 256 MB 20-GB Fixed DVD-ROM drive Modular Bay Floppy Drive Integrated NIC Touchpad	Pentium III 1.2 GHz-M 15-inch XGA 256 MB 30-GB Fixed DVD-ROM Drive Modular Bay CD-RW drive Integrated NIC Touchpad
<b>NORTH AMERICA</b>				
US				
	N180P113X520C25TOL	Windows XP Professional	470030-249	
	N180P120X530C25TOL	Windows XP Professional		470030-255

Additional Evo N180 models are available with the modules listed below through the "Built For Your Business", custom-configuration models at [www.directplus.compaq.com](http://www.directplus.compaq.com).

- Intel Pentium III-M 1.06 GHz
- Microsoft Windows 2000 Professional

### Options

<b>Memory</b>	512-MB SDRAM (133 MHz) Memory Module	238830-B25
	256-MB SDRAM (133 MHz) Memory Module	197898-B25
	128-MB SDRAM (133 MHz) Memory Module	197897-B25
	64-MB SDRAM (133 MHz) Memory Module	197896-B25
<p>(Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only Compaq branded memory modules to ensure compatibility.)</p>		
<b>Power</b>	Lithium-Ion (4.0AH) – Primary Battery	235883-B21
	High Capacity Lithium-Ion 2 <sup>nd</sup> Battery (Modular Bay option)	235882-B21
	AC Adapter	177624-001
	Auto Adapter	167895-001
<b>Modular Bay Optical Drives</b>	8X CD-RW	235880-B21
	8X DVD-ROM	235879-B21
	DVD/CD-RW combo drive	235881-B21
	1.44MB Floppy Drive	274040-B21
<b>Useful Accessories</b>	DEFCON Security Lock	201708-001
	DEFCON Security System	158638-001
<b>Carrying Cases</b>	Compaq Plus (Nylon)	242360-B25
	Compaq Ultralite (Nylon)	167336-B21
	Compaq Ultralite (Leather)	242359-B25
	Compaq Professional (Nylon)	242361-B25
	Compaq Professional (Leather)	242362-B25
<p><b>NOTE:</b> For additional Compaq Brand cases, visit <a href="http://www.compaq.com/products/notebooks/">http://www.compaq.com/products/notebooks/</a></p>		
<b>Port Expansion Solutions</b>	QuikDock Port Replicator	235884-B21



## Memory

---

### STANDARD MEMORY

2 slots available

Slot 1 contains 1 256MB SODIMM

Standard	Slot 1	Slot 2
256 MB	256 MB	Empty
320 MB	256 MB	64 MB
384 MB	256 MB	128 MB
512 MB	256 MB	256 MB
768 MB	256 MB	512 MB
1 GB	512 MB	512 MB

Following are memory options available from Compaq:

- 64-MB Memory Upgrade            197896-B25
- 128-MB Memory Upgrade        197897-B25
- 256-MB Memory Upgrade        197898-B25
- 512-MB Memory Upgrade        238830-B25

---

## Storage

### DRIVE SUPPORT

System Drive Support	Quantity Supported	Drive Bay Supported
<b>Media</b>		
8x DVD-ROM	1	Modular Bay; Removable
CD-RW Drive	1	Modular Bay; Removable
DVD/CD-RW combo drive	1	Modular Bay; Removable
Secondary Battery	1	Modular Bay; Removable
1.44MB Floppy Drive	1	Modular Bay; Removable
<b>Hard Drives</b>		
20-GB Hard Drive	1	
30-GB Hard Drive	1	

## Technical Specifications

<b>System Unit</b>	<b>Dimensions (H x W x D)</b>	1.63 x 12.91 x 10.99 in/4.14 x 32.79 x 27.91 cm	
	<b>Weight</b>	15-inch TFT with Li-Ion Battery and weight saver 7.65 lb/3.47 kg	
<b>Stand-Alone Power Requirements</b>	Nominal Operating Voltage (8-cell Lithium-Ion)	14.8 VDC	
	Nominal Operating Voltage (6-cell Lithium-Ion in Modular Bay)	11.1 VDC	
<b>Temperature</b>	Operating	50° to 95°F/10° to 35°C	
	Non-operating	-4° to 140°F/-20° to 60°C	
<b>Relative Humidity (non-condensing)</b>	Operating	10% to 90% relative humidity, non-condensing	
	Non-operating	5% to 95% relative humidity, 101.6°F/38.7°C Maximum wet bulb temperature	
<b>Shock</b>	Operating	10 G, 11 ms, half-sine	
	Non-operating	60 G, 11 ms, half-sine	
<b>Vibration</b>	Operating	0.5 G zero-to-peak, 10 to 500 Hz, at 0.5 oct/min sweep rate	
	Non-operating	1.0 G, zero-to-peak, 10 to 500 Hz, at 0.5 oct/min sweep rate	
<b>Maximum Altitude (unpressurized)</b>	Operating	0 to 10,000 ft/0 to 3,048 m	
	Non-operating	0 to 30,000 ft/0 to 9,144 m	
<b>15-inch Color TFT XGA Display</b>	<b>Dimensions (H x W)</b>	9.52 x 12.47 in/24.2 x 31.7 cm	
	<b>Diagonal Size</b>	15 in/38 cm	
	<b>Mounting</b>	Internal (Side Mount)	
	<b>Number of Colors</b>	256K	
	<b>Contrast Ratio</b>	150:1	
	<b>Brightness</b>	120+ nit	
	<b>Pixel Resolution</b>	Pitch	0.297 x 0.297 mm
		Format	1024 x 768
		Configuration	RGB Vertical Stripe
	<b>Backlight</b>	Cold cathode fluorescent, 1 tube	
	<b>Character Display</b>	80 x 25	
<b>Total Power Consumption</b>	5.5W		
<b>Refresh</b>	60 Hz		

## Technical Specifications

### Hard Drives

#### 20-GB

<b>Capacity</b>	20 GB
<b>Height</b>	0.374 in/9.5 mm
<b>Width</b>	2.75 in/70 mm
<b>Interface</b>	ATA-5
<b>Transfer Rate</b>	Synchronous (maximum burst) 100 MB/s (Drive Capability)
	Security ATA Security
<b>Seek Time</b> (typical reads, including settling)	Single Track 2.5 ms
	Average 12 ms
	Maximum 23 ms
<b>Rotational Speed</b>	4200 rpm
<b>Logical Blocks</b>	~ 39,070,080
<b>Operating Temperature</b>	41° to 131°F/5° to 55°C

#### 30-GB

<b>Capacity</b>	30 GB
<b>Height</b>	0.374 in/9.5 mm
<b>Width</b>	2.75 in/70 mm
<b>Interface</b>	ATA-5
<b>Transfer Rate</b>	Synchronous (maximum burst) 100 MB/s (Drive Capability)
	Security ATA Security
<b>Seek Time</b> (typical reads, including settling)	Single Track 2.5 ms
	Average 12 ms
	Maximum 23 ms
<b>Rotational Speed</b>	4200 rpm
<b>Logical Blocks</b>	~ 58,605,120
<b>Operating Temperature</b>	41° to 131°F/5° to 55°C

## Technical Specifications

DVD/CD-RW Drive	Modular Bay Drive	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in/1.27 x 13.25 x 12.61 cm
		Weight	0.74 lb/0.33 kg
	Center Hole Diameter	1.5 cm	
	Disk Diameter	12 cm/8 cm	
	Disk Thickness	1.2 mm	
	Track Pitch	0.74 $\mu$ m	
	Access Times (typical reads, including settling)	Random CD-ROM	< 120 ms
		Full-Stroke CD-ROM	< 175 ms
	Audio Output Level	Line-out	0.7 Vrms
	Cache Buffer	128 KB/s (minimum)	
	Maximum transfer rate	Read (CD-ROM):	Up to 24X (3,600 KB/sec)
		Read (DVD):	Up to 6X (8,100 KB/sec)
		Write:	Up to 4X (600 KB/sec)
		Re-write:	Up to 4X (600 KB/sec)
	Start-up Time	< 7 seconds	Single Session Disk
Stop Time	< 4 seconds		

CD-RW Drive (Modular Bay)	Modular Bay Drive	Dimensions (H x W x D)	0.5 x 5.21 x 4.97 in/1.27 x 13.25 x 12.61 cm
		Weight	0.74 lb/0.33 kg
	Center Hole Diameter	1.5 cm	
	Disk Diameter	12 cm/8 cm	
	Disk Thickness	1.2 mm	
	Track Pitch	0.74 $\mu$ m	
	Access Times (typical reads, including settling)	Random	< 100 ms
		Full-Stroke	< 200 ms
	Audio Output Level	Line-out	0.7 Vrms
	Cache Buffer	128 KB/s (minimum)	
	Maximum transfer rate	Read (CD-ROM):	Up to 24X (3,600 KB/sec)
		Write:	Up to 8X (1,200 KB/sec)
		Re-write:	Up to 4X (600 KB/sec)
	Start-up Time	< 7 seconds	
	Stop Time	< 4 seconds	

## Technical Specifications

DVD-ROM Drive (Fixed)	Center Hole Diameter	1.5 cm		
	Disc Diameter	12 cm/8 cm		
	Disc Thickness	1.2 mm		
	Track Pitch	0.74 $\mu$ m		
	Access Times (typical reads, including settling)	Random	< 180 ms DVD Media	
		Full-Stroke (typical)	< 300 ms DVD Media	
		Random (typical)	< 120 ms CD Media	
		Full-Stroke (typical)	< 200 ms CD Media	
	Cache Buffer	512 KB/s (minimum)		
	Maximum transfer rate	Read (CD-ROM):	Up to 24X (3,600 KB/sec)	
		Read (DVD):	Up to 8X (10,800 KB/sec)	
Start-up Time	< 12 seconds			
Stop Time	< 3 seconds			
External AC Adapter	Weight	0.45 lb/0.21 kg		
	Power Supply (Input)	Operating Voltage	100 to 240 VAC RMS Nominal	
		Operating Current	1.5 A RMS	
		Operating Frequency Range	50 to 60 Hz AC Nominal	
		Maximum Transient	4/50 kV	
Lithium-Ion Battery Pack	Dimensions (H x W x D)	0.86 x 5.63 x 3.34 in/2.2 x 14.3 x 8.5 cm		
	Weight	0.96 lb/0.44 kg		
	Cells	8-cell Lithium-Ion		
	Energy	Voltage	14.4 V	
		Amp-hour capacity	4.0 Ah	
		Watt-hour capacity	57.6Wh	
	Temperature	Operating	50° to 104°F/10° to 40°C	
		Non-operating	-4° to 140°F/-20° to 60°C	

## Technical Specifications

Modular Bay Lithium-Ion Battery Pack	Dimensions (H x W x D)	0.55 x 5.19 x 5.31 in/1.4 x 13.2 x 13.5 cm	
	Weight	0.77 lb/0.35 kg	
	Cells	6-cell Lithium-Ion	
	Energy	Voltage	10.8 V
		Amp-hour capacity	3.6 Ah
		Watt-hour capacity	38.9 Wh
	Temperature	Operating	50° to 104°F/10° to 40°C
		Non-operating	-4° to 140°F/-20° to 60°C

### Compaq PCs use genuine Microsoft® Windows®

[www.microsoft.com/piracy/howtotell](http://www.microsoft.com/piracy/howtotell)

Compaq, Evo, registered United States Patent and Trademark Office.

Intel, the Intel Inside Logo, and Pentium are registered trademarks of Intel Corporation.

Microsoft, MS and Windows are registered trademarks of the Microsoft Corporation in the U.S. and other countries.

Other product names mentioned herein may be trademarks and/or registered trademarks of their respective companies.

©2002 Compaq Information Technologies Group, L.P.