



### Overview

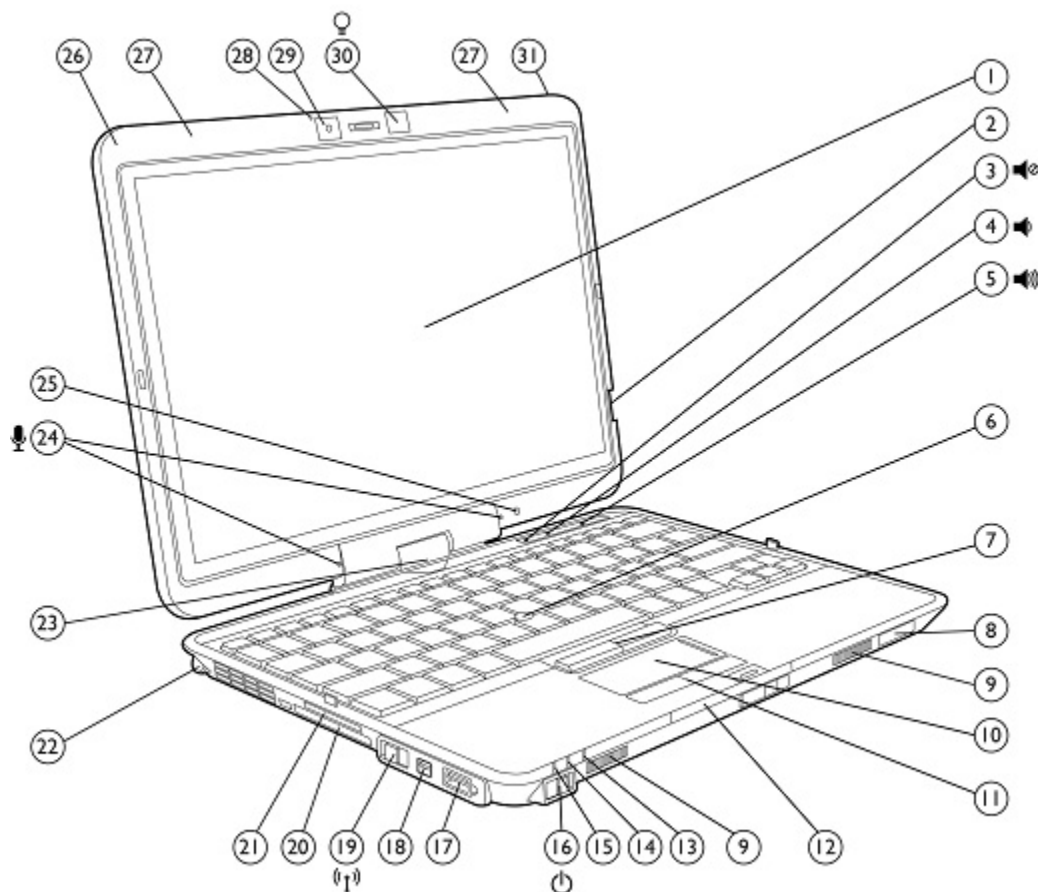


- |   |  |
|---|--|
| 1. Optional touch screen                            | 17. USB 2.0 port (powered)             |
| 2. HP Fingerprint Sensor                            | 18. 1394a port                         |
| 3. Volume mute button with LED indicator            | 19. Wireless on/off with LED indicator |
| 4. Volume down button with LED indicator            | 20. ExpressCard/34 slot                |
| 5. Volume up button with LED indicator              | 21. Secure Digital (SD) slot           |
| 6. Pointstick                                       | 22. Pen holder                         |
| 7. Pointstick buttons                               | 23. Convertible hinge                  |
| 8. Bluetooth compartment                            | 24. Dual-microphone array              |
| 9. Stereo speakers                                  | 25. Ambient light sensor               |
| 10. Touchpad with scroll zone                       | 26. Internal WWAN antenna              |
| 11. Touchpad buttons                                | 27. Two internal WLAN antennas         |
| 12. Business card slot                              | 28. Webcam LED indicator               |
| 13. Drive activity / HP 3D DriveGuard LED indicator | 29. 2 MP Webcam                        |
| 14. Battery charging LED indicator                  | 30. HP Night Light                     |
| 15. Power/standby LED indicator                     | 31. External WWAN antenna              |
| 16. Power switch                                    |  |

### Overview

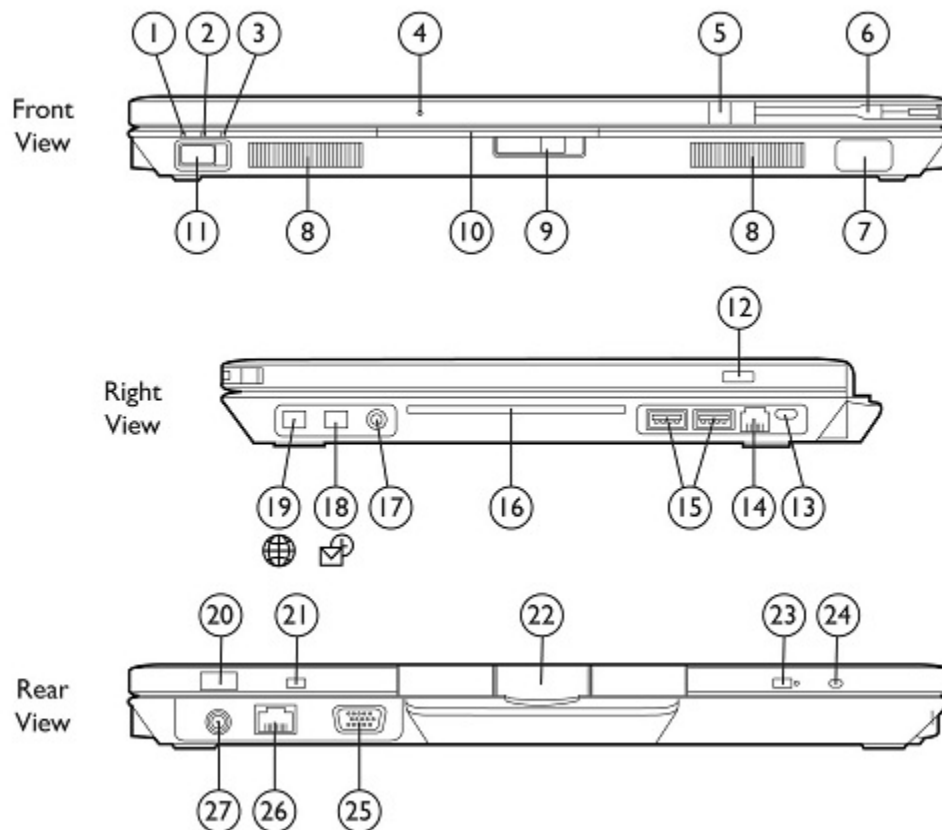

- |  |   |
|--|---|
| 1. Power/standby LED indicator                     | 15. USB 2.0 ports (2)                     |
| 2. Battery charging LED indicator                  | 16. Smart Card reader                     |
| 3. Drive activity / HP 3D DriveGuard LED indicator | 17. Combo headphone/mic jack              |
| 4. Webcam LED indicator                            | 18. QuickLook 3 button                    |
| 5. External WWAN antenna button                    | 19. QuickWeb button                       |
| 6. External WWAN antenna                           | 20. Jog dial                              |
| 7. Bluetooth compartment                           | 21. Esc button                            |
| 8. Stereo speakers                                 | 22. Convertible Hinge                     |
| 9. Display release latch                           | 23. Rotate button                         |
| 10. Business Card slot                             | 24. Windows security button (ctl-alt-del) |
| 11. Power switch                                   | 25. VGA/external monitor connector        |
| 12. HP Fingerprint Sensor                          | 26. RJ-45/Ethernet port                   |
| 13. Kensington Lock slot                           | 27. Power connector                       |
| 14. RJ-11/modem port                               |   |

### Overview

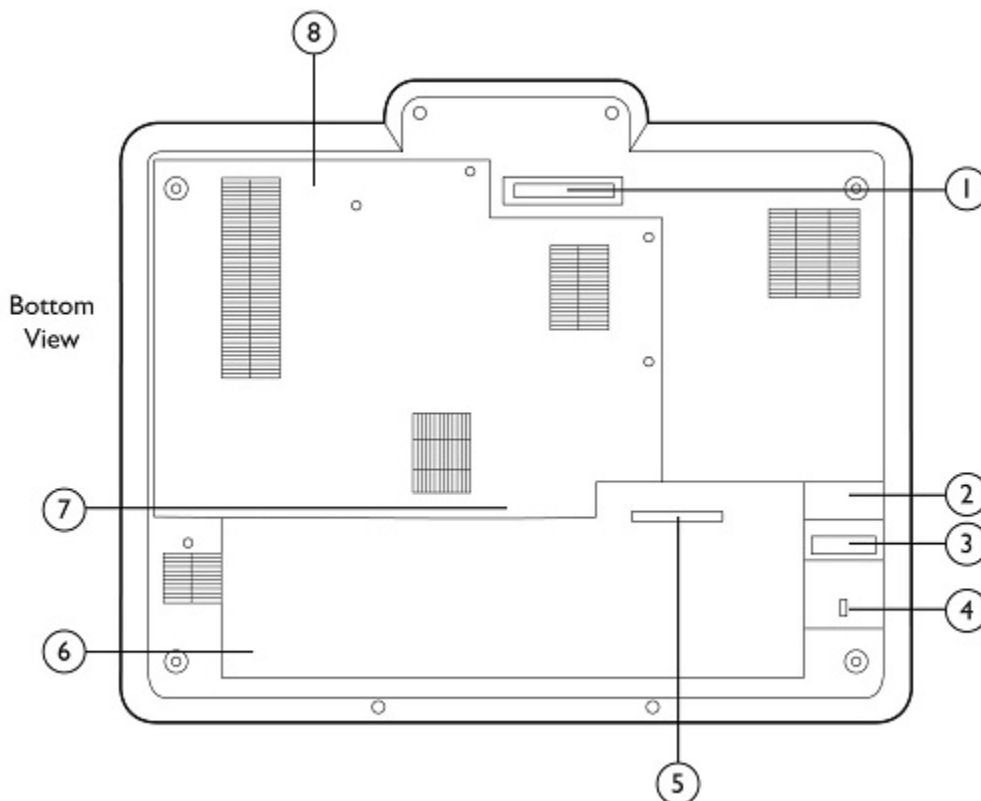

- |                                     |   |
|-------------------------------------|---|
| 1. Docking connector                | 5. Battery charge level indicator                           |
| 2. Battery release latch            | 6. Battery bay  |
| 3. Secondary battery connector      | 7. SIM card slot (select units, located inside battery bay) |
| 4. Secondary battery connector door | 8. Hard drive, memory, WLAN, WWAN module compartment        |

### At A Glance

- Genuine Windows 7 Professional Edition, Genuine Windows Vista Business, Genuine Windows XP Tablet Edition available through downgrade rights from Windows 7 Professional, or FreeDOS
- Convertible tablet design starting at 3.80 lb/1.72 kg and 1.25-inch/31.7 mm thin
- Full magnesium alloy chassis, chemically-strengthened glass over display, HP DuraKeys and HP DuraFinish
- Designed to meet the military standard Mil-Std-810G for vibration, dust, humidity, altitude, and high temperature operation\*
- Spill-resistant keyboard with drains
- 12.1-inch diagonal LED-backlit WXGA ultra wide-viewing angle display with chemically-strengthened glass top cover, Digitizer, optional two finger multi-touch screen with gesture support, Ambient Light Sensor, and optional Outdoor Viewable panel
- Intel HD Graphics, DDR3 system memory
- New HP 2740 Ultra-Slim Expansion Base with DisplayPort and eSATA port
- HP QuickLook 3 (instant access to email, calendar, contacts and tasks), HP QuickWeb
- Touch-sensitive controls for mute, volume down, and volume up
- Flexible wireless connectivity options:
  - Integrated HP un2420 EV-DO/HSPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology with GPS
  - Integrated Intel Centrino® Advanced-N 6200 802.11 a/b/g/n or Broadcom 802.11a/b/g/n or b/g wireless LAN module
  - Bluetooth® v2.1
- Intel® Core™ i7 or Core i5 processor with Intel Turbo Boost Technology
- Up to 320-GB 5400 rpm, user-removable hard drive protected by HP 3D DriveGuard, or up to 160 GB Solid State Drive

### Overview

- Enhanced security features including HP ProtectTools, Drive Encryption, integrated Smart Card Reader, HP SpareKey, Computrace BIOS support, HP Fingerprint Sensor, TPM 1.2 Embedded Security Chip\*\*
- New central management software for HP ProtectTools to manage the security of multiple notebooks from a single point
- Choice of standard 6-cell primary battery with fuel gauge or HP Long Life battery, plus optional external HP 2700 Ultra-Slim Battery
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, report workforce power consumption
- Dual pointing devices (touchpad and pointstick) and jog dial
- Supports multi-touch screen gestures
- Integrated 2 MP webcam with Business Card Reader software
- HP Night Light
- ExpressCard/34 slot
- Secure Digital (SD) slot

\* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

\*\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Standard Features

#### Processors

##### Intel Standard Voltage Processor, soldered

Intel Core i7-620M Processor (2.66 GHz, 4 MB L3 cache)\*  
Up to 3.33 GHz with Intel Turbo Boost Technology

Intel Core i5-540M Processor (2.53 GHz, 3 MB L3 cache)\*  
Up to 3.06 GHz with Intel Turbo Boost Technology

Intel Core i5-520M Processor (2.4 GHz, 3 MB L3 cache)\*  
Up to 2.93 GHz with Intel Turbo Boost Technology

\* Intel's numbering is not a measurement of higher performance.

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

#### Operating System

##### Preinstalled

Genuine Windows 7 Professional Edition 32\*  
Genuine Windows 7 Professional Edition 64\*  
Genuine Windows XP Tablet Edition available through downgrade rights from Windows 7 Professional\*†  
Genuine Windows Vista Business 32\*\*  
FreeDOS

##### Supported

Genuine Windows Vista Enterprise 32\*\*  
Genuine Windows Vista Enterprise 64\*\*  
Genuine Windows 7 Home Premium Edition\*

##### Certified

SuSE Linux Enterprise Desktop 11

\* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See: <http://www.microsoft.com/windows/windows-7/> for details.

\*\* Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.msp> and <http://www.microsoft.com/windowsvista/getready/capable.msp> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

† Windows XP Tablet Edition is preinstalled on this system and includes end user rights and media for Windows 7 Professional. You may only use one version at a time. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

#### Chipset

Mobile Intel QM57 Express Chipset

### Standard Features

#### Intel Core i5 with vPro/Core i7 with vPro technology capable

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with an Intel Centrino® Advanced-N 6200 series WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology (AMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off\* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

\*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

**NOTE:** Some functionality of Intel Core i5 with vPro/Core i7 with vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel Core i5 with vPro/Core i7 with vPro technology is dependent on 3rd party software providers. Compatibility with future "virtual appliances" is yet to be determined.

---

#### Graphics

Intel HD Graphics  
Microsoft DirectX 10 (Shader 4.0) and OpenGL 2.1 capable

---

#### Display

**Internal** 12.1-inch diagonal LED-backlit WXGA ultra wide viewing angle anti-glare (1280 x 800)  
Digitizer only or Digitizer and Multi-touch  
Optional Outdoor View\*  
Ambient light sensor

**External** Up to 32-bit per pixel color depth  
**VGA** port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz  
**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

\* Outdoor View is an option available only with both Digitizer and Multi-touch that provides enhanced viewing:

- 12% increase in front of screen display brightness with no loss of battery life
- Up to 235% increase in contrast, resulting in better viewability, at wide viewing angles
- 25% less specular reflections in bright light
- 91% less diffuse reflections in bright light
- 67% more contrast in bright sunlight

**NOTE:** This data is based on typical measurements by the display manufacturer. Actual measurements may vary from panel to panel.

### Standard Features

<b>Memory</b>	<b>Standard</b>	DDR3 PC3-10600 SDRAM (1333 MHz)* Two SODIMM slots supporting dual-channel memory 1024 MB, 2048 MB and 4096 MB SODIMMs
	<b>Maximum</b>	Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2
	<b>Dual-channel</b>	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

\* Memory bus runs at a maximum of 1066 MHz.

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

<b>Communications</b>	Integrated Intel Gigabit Ethernet (10/100/1000 NIC)* 56K V.92 modem**
-----------------------	--

\* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

\*\* Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

<b>Wireless Devices</b>	Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Mobile Broadband (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature or as an option to be added later. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.
<b>HP un2420 EV-DO/HSPA Mobile Broadband Module</b>	Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications such as Computrace LoJack Pro Premium for HP ProtectTools. <b>NOTE:</b> Separately purchased mobile network operator service is required. Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.
<b>All 802.11 integrated wireless LAN options</b>	Wi-Fi CERTIFIED* Cisco Compatible Extensions support Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support Two antennas integrated in the display enclosure
<b>Intel Centrino Advanced-N 6200 (2x2)</b>	Integrated support for 802.11a, b, g, and n* 2 transmit, 2 receive antennas Up to 300 mbps data rate
<b>Broadcom 4322AGN 802.11a/b/g/n Wi-Fi Adapter</b>	Integrated support for 802.11a, b, g, and n Up to 300 mbps data rate
<b>Broadcom 4312G 802.11b/g WiFi Adapter</b>	Integrated support for 802.11 b and g Up to 54 mbps data rate



### Standard Features

**HP Integrated Module with Bluetooth Wireless Technology** Bluetooth Specification v2.1 compliant  
Works with a wide range of Bluetooth devices

\* In countries where 802.11n is not allowed, this capability is not enabled (802.11a/b/g only).

### Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19-mm x 19-mm key pitch (center-to-center spacing), 2.0-mm stroke, and comfort-dished keycaps.

HP DuraKeys is a clear coating applied over the notebook keyboard that helps protect the finish and the printed characters on the keys. HP DuraFinish helps protect the finish on the keyboard deck, graphics, and icons from normal wear and tear.

HP Night Light shines directly on keyboard for low-light conditions.

### Touch-sensitive controls

Touch-sensitive controls provide easy access to the following features: volume mute, volume down, volume up.

### Pointing device

Dual pointing (Touchpad with scroll zone and Pointstick, each with two pick buttons)  
Digital Eraser Pen with tether and clip  
Multi-touch screen gestures

### Expansion card slots

**ExpressCard/34 slot** Supports ExpressCard/34  
**Integrated Smart Card Reader** Compatible with ISO 7816 compliant Smart Cards  
PC/SC interface support  
**Secure Digital slot** Supports SD (Secure Digital), MMC (MultiMedia Card)

### Storage

**Hard Drives** 160/250/320 GB 5400 rpm 1.8-inch SMART SATA II Hard Drive  
**NOTE:** Hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 15 GB is reserved for the system recovery software.  
**HP 3D DriveGuard** The hard drive is mounted to the notebook frame, reducing the transmission of shock away from the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.  
**Solid State Drives** 80/160 GB 1.8-inch Solid State Drive  
**External Optical Drives** Via optional HP 2740 Ultra-Slim Expansion Base:  
9.5mm DVD+/-RW SuperMulti Drive  
Via optional HP External USB CD/DVD R/RW Drive



### Standard Features

<b>Interfaces</b>	<b>ExpressCard/34 slot</b>	Supports ExpressCard/34
	<b>Smart Card Reader</b>	One
	<b>External monitor</b>	One – VGA
	<b>1394a</b>	One
	<b>Combo headphone/mic jack</b>	One
	<b>Power connector</b>	One
	<b>RJ-11/modem</b>	One
	<b>RJ-45/Ethernet</b>	One
	<b>USB 2.0</b>	Three (including one powered USB 2.0 port)
	<b>Docking connector</b>	For HP 2740 Ultra-Slim Expansion Base
	<b>Secondary battery connector</b>	For HP 2700 Ultra-Slim Battery
	<b>LED status indicators</b>	Ten

**Audio/Visual** High Definition Audio support w/24-bit DAC  
 Integrated stereo speakers  
 Integrated dual-microphone array  
 Touch-sensitive controls for volume up, volume down, and mute  
 Combo headphone/mic jack

Integrated 2 MP Webcam with Business Card Reader Software

- Supports videoconferencing and still image capture
- Large image sensor for excellent color matching and good low light sensitivity
- Up to 30 frames/sec
- AutoMacro focus lens
- Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
- 16-bit true color (camera sensors output YCrCb format among others)

<b>Software</b>	<b>Preinstalled software with Windows operating system</b>	HP Recovery Manager (available with Windows 7 or Vista only) HP Support Assistant (available with Windows 7 or Vista only) HP ProtectTools Security Manager HP QuickLaunch Buttons Software HP QuickLook 3 HP QuickWeb HP DayStarter HP Power Assistant HP Connection Manager HP Wireless Assistant HP SkyRoom 90-day trial Microsoft Office Professional 2007 60-day Convertible Trial McAfee Total Protection* PDF Complete SE Roxio Creator Business 10 (select models) InterVideo WinDVD (select models) Synaptics Touchpad Driver HP Webcam Software WinZip 12 (trial version)
	<b>Additional software available from the web</b>	HP SoftPaq Download Manager HP Client Manager Software HP Client Management Solutions

### Standard Features

\* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

**HP Recovery Manager** Models shipped with Windows 7 or Windows Vista include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 15 GB of the hard drive is reserved for the system recovery software.

### Security

#### Standard Features

HP ProtectTools Security Manager  
HP Fingerprint Sensor  
Integrated Smart Card Reader  
Enhanced Pre-Boot Security  
HP SpareKey  
One-Step Logon  
Setup Password  
DriveLock Password  
TPM 1.2 Embedded Security Chip\*  
TPM Enhanced DriveLock\*  
HP Disk Sanitizer  
Kensington Lock slot  
Support for Computrace\*\* LoJack Pro for HP ProtectTools

\*TPM module disabled where use is restricted by law; for example, Russia and China.

\*\* The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

### HP ProtectTools Security Manager with Central Management

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:

- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Computrace LoJack Pro for HP ProtectTools

HP ProtectTools is now centrally manageable with the capability to manage notebooks from a single point. Security is management ready out of the box, in partnership with Digital Persona. New features address requirements that customers expect from a centrally managed security solution such as user provisioning, credential reset, and credential revocation.

HP ProtectTools provides two separate management solutions, targeted at the enterprise and the SMB:

- Digital Persona Pro AD: Designed for the enterprise customer. Integrates with Active Directory and gives IT Managers the ability to provision users, create login policies based on passwords, biometrics or smartcards. Management features also include remote credential recovery in case the user forgets the password, loses the smartcard or cannot use the fingerprint reader for any reason. In addition, advanced auditing capabilities are also built in. Digital Persona Pro AD is available now.
- Digital Persona Pro Workgroup: Designed for the small business customer. Provides

### Standard Features

features similar to the Active Directory version, but for workgroups. Workgroup activation is built into HP ProtectTools, and activation of up to 5 seats is completely free.

**Power Supply** External 65-watt Smart AC adapter, 6-foot (1.8-meter) power cord included. Total length including external AC adapter is 12 feet (3.66 meter). HP Fast Charge\*  
 \*HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge does not apply to the optional HP 2700 Ultra-Slim Battery.

**Battery**                      **Primary Battery**                      HP 6-cell 44 WHr Li-Ion Primary Battery with fuel gauge LEDs  
 HP Long Life 6-cell 39 WHr Li-Ion Primary Battery

<b>Battery Life</b>		<b>HP 6-cell 44 WHr Primary</b>	<b>HP Long Life 6-cell 39 WHr Primary</b>
	<b>Primary Battery</b>	Up to 5 hours	**
	<b>Primary Battery and Optional HP 2700 Ultra-Slim Battery</b>	Up to 11 hours	**

**NOTE:** Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark [www.bapco.com/products/mobilemark2007](http://www.bapco.com/products/mobilemark2007) for additional details.

\*\* This configuration not tested for battery life.

**System Standby Time** Up to 1 week

**Power Conservation** Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)  
 Intel Display Power Saving technology  
 Hibernation  
 Standby  
 ACPI compliance

**Docking (optional)** HP 2740 Ultra-Slim Expansion Base with 9.5mm DVD+/-RW SuperMulti Drive  
 This optional expansion base includes connectors for (3) USB 2.0 ports, eSATA port, DisplayPort, VGA, RJ-45 Ethernet pass thru, Stereo microphone in, stereo headphone out, and DC-in.

**Service and Support** HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country; 1-year limited warranty on primary battery and digital eraser pen. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.  
**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

### Options

<b>Memory</b>	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA
<b>Storage</b>	HP Notebooks USB Diskette Drive	DC361B
	HP USB 250 GB Pocket Media Drive	FE477AA
	HP External USB Drive CD/DVD R/RW	FS943AA
<b>Expansion Solutions</b>	HP 2740 Ultra-Slim Expansion Base	TBD
	HP USB 2.0 Docking Station	FQ834AA
	HP Essential USB 2.0 Port Replicator	AQ731AA
<b>Communications</b>	HP un2420 EVDO/HSPA Mobile Broadband Module	WD301AA
<b>Power</b>	HP 2700 Ultra-Slim Battery	RX932AA
	HP 65W Smart AC Adapter	ED494AA
	HP 90W Smart AC Adapter	ED493AA
	HP 90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	HP 6-Cell Li-Ion Primary Battery	AH547AA
	HP 1-bay Battery Charging Station	RW635AA#xxx
	HP 5-bay Battery Charging Station	RW636AA#ABA
	Battery Adapter Kit	RW641AA
Travel Adapter	AU155AA#xxx	
<b>Carrying Cases</b>	HP Basic Carrying Case	AJ078AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA
	HP Basic Backpack	AM863AA
	HP Basic Messenger Carrying Case	AP355AA
	Merlot Slip Case	AU095AA
	HP Professional Series Carrying Case	AT886AA
	HP Professional Series Backpack	AT887AA
	HP Professional Series Messenger	AT888AA
	HP Professional Series Lady's Case	AT889AA
	HP Professional Series Slip Case	AT890AA
	HP Elite Series Lady's Case	AT891AA
HP Professional Series Quick Case	AT892AA	
<b>Security</b>	HP/Kensington MicroSaver Security Lock	PC766A

### Options

<b>Input/Output Devices</b>	HP Tablet PC Tether/Eraser Pen	PL800A
	HP USB Keyboard & Mouse Bundle	RC465AA#xxx
	HP USB Optical Travel Mouse	RH304AA
	HP Wireless Mouse	AR085AA
	HP BT Headset	AR084AA
	HP Mobile Audio Speakers	FS944AA
	HP Mobile Productivity Bundle	AQ729AA
	HP Mobile Bluetooth Presenter Mouse	GK872AA

### Memory

DDR3 PC3-10600 SDRAM (1333 MHz)\*  
 Two SODIMM slots supporting dual-channel memory  
 SODIMM sizes supported: 1024 MB, 2048 MB and 4096 MB

- Standard Memory**
- 2048 MB (2048 MB x 1)
  - 3072 MB (2048 MB + 1024 MB)
  - 4096 MB (4096 MB x 1)
  - 4096 MB (2048 MB x 2)
  - 6144 MB (4096 MB + 2048 MB)
  - 8192 MB (4096 MB x 2)

**Optional Memory Upgrades** Support for up to 8192 MB of memory with the installation of optional DDR3 SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
4096 MB	4096 MB	empty
6144 MB	4096 MB	2048 MB
8192 MB	4096 MB	4096 MB

\* Memory bus runs at a maximum of 1066 MHz.

**NOTE:** This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

<b>Memory Upgrades</b>	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA

### Storage

#### Internal Storage Device

Hard Drives (1.8-inch SMART SATA II)	Quantity Supported	Drive Bay
--------------------------------------	--------------------	-----------

160 GB 5400 rpm	One	Dedicated hard drive bay
-----------------	-----	--------------------------

250 GB 5400 rpm	One	Dedicated hard drive bay
-----------------	-----	--------------------------

320 GB 5400 rpm	One	Dedicated hard drive bay
-----------------	-----	--------------------------

- or -

Solid State Drive (1.8-inch)	Quantity Supported	Drive Bay
------------------------------	--------------------	-----------

80 GB Solid State Drive	One	Dedicated hard drive bay
-------------------------	-----	--------------------------

160 GB Solid State Drive		
--------------------------	--	--

---

#### Optical Drive Support

External Optical Drives	Quantity Supported	Optional Expansion Unit
-------------------------	--------------------	-------------------------

9.5mm DVD+/-RW SuperMulti Drive	One	HP 2740 Ultra-Slim Expansion Base
---------------------------------	-----	-----------------------------------

CD/DVD R/RW Drive	One	HP External USB CD/DVD R/RW Drive
-------------------	-----	-----------------------------------



### Technical Specifications

<b>System Unit</b>	<b>Dimensions (HxWxD)</b>	1.25 in (at front) x 11.42 in x 8.35 in 31.7 mm (at front) x 290 mm x 212 mm
	<b>Weight</b>	Starting from 3.80 lb (1.72 kg)
	<b>NOTE:</b> Height varies depending upon where on the tablet the measurement is made. Starting weight includes 6-cell battery, hard drive, 2 GB memory, 802.11 wireless communications module. Weight varies by configuration and components.	
<b>Stand-Alone Power Requirements (AC Power)</b>	Nominal Operating Voltage	18.5 V
	Average Operating Power	12.5 W
	Max Operating Power	< 65 W
<b>Temperature</b>	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
<b>Relative Humidity</b>	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
<b>Shock</b>	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
<b>Random Vibration</b>	Operating	0.75 grms
	Non-operating	1.50 grms
<b>Altitude (unpressurized)</b>	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
<b>Industry Standard Certifications</b>	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered Silver in United States**
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KCC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
Saudi Arabian Compliance (ICCP)	Yes	
SABS	Yes	
UKRSERTCOMPUTER	Yes	

\* Configurations of the HP EliteBook 2740p that are ENERGY STAR qualified are identified as HP EliteBook 2740p ENERGY STAR on HP websites and on [www.energystar.gov](http://www.energystar.gov).

\*\* EPEAT Silver Registered in U.S. EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for

### Technical Specifications

registration status by country.

**NOTE:** For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

<b>HP 65W Smart AC Adapter</b>	<b>Dimensions</b>	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	<b>Weight</b>	0.62 lb (280 g)	
	<b>Input</b>	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
	<b>Output</b>	Output power	65W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	<b>Connector</b>	3 pin/grounded, mates with interchangeable cords	
	<b>Environmental Design</b>	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
	Storage Humidity	10% to 90%	
<b>EMI and Safety Certifications</b>	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.		

### Displays

<b>12.1-inch LED-backlit WXGA UWVA, anti-glare with Digitizer</b>	<b>Active Area (W x H)</b>	10.3 x 6.4 in (26.1 x 16.3 cm)		
	<b>Diagonal Size</b>	12.1 in (30.7 cm)		
	<b>Surface Treatment</b>	Anti-glare		
	<b>Contrast Ratio</b>	400:1 (typical)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	200 nit (typical)		
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.204 mm	
		<b>Format</b>	1280 x 800	
		<b>Configuration</b>	RGB Stripe	
	<b>Backlight</b>	LED		
	<b>PPI</b>	125		
<b>Viewing Angle</b>	±75° Horizontal, ±75° Vertical (minimum)			

## Technical Specifications

<b>12.1-inch LED-backlit WXGA UWVA. anti-glare with Digitizer and Outdoor View</b>	<b>Active Area (W x H)</b>	10.3 x 6.4 in (26.1 x 16.3 cm)		
	<b>Diagonal Size</b>	12.1 in (30.7 cm)		
	<b>Surface Treatment</b>	Anti-glare		
	<b>Contrast Ratio</b>	400:1 (typical)		
	<b>Refresh Rate</b>	60 Hz		
	<b>Brightness</b>	200 nit (typical)		
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.204 mm	
		<b>Format</b>	1280 x 800	
		<b>Configuration</b>	RGB Stripe	
	<b>Backlight</b>	LED		
<b>PPI</b>	125			
<b>Viewing Angle</b>	±75° Horizontal, ±75° Vertical (minimum) ±80° Horizontal, ±80° Vertical (typical)			

## Internal Storage

<b>320 GB 5400 rpm 1.8" SATA Hard Drive</b>	<b>Drive Weight</b>	0.13 lbs (62 g)		
	<b>Capacity</b>	320 GB		
	<b>Height</b>	0.31 in (8 mm)		
	<b>Width</b>	2.12 in (54 mm)		
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s		
	<b>Transfer Rate</b>	<b>Synchronous (maximum)</b>	150 MB/s (Drive Capacity)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	3ms	
		<b>Average</b>	15ms	
		<b>Maximum</b>	26ms	
	<b>Rotational Speed</b>	5400 rpm		
	<b>Logical Blocks</b>	625,142,448		
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]		
	<b>Features</b>	ATA Security		

## Technical Specifications

<b>250 GB 5400 rpm 1.8" SATA Hard Drive</b>	<b>Drive Weight</b>	0.13 lbs (62 g)		
	<b>Capacity</b>	250 GB		
	<b>Height</b>	0.31 in (8 mm)		
	<b>Width</b>	2.12 in (54 mm)		
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s		
	<b>Transfer Rate</b>	<b>Synchronous</b>	150 MB/s (Drive Capacity)	
		(maximum)		
	<b>Seek Time</b>	<b>Single Track</b>	3ms	
	(typical reads, including settling)	<b>Average</b>	15ms	
		<b>Maximum</b>	26ms	
	<b>Rotational Speed</b>	5400 rpm		
	<b>Logical Blocks</b>	488,397,168		
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]		
<b>Features</b>	ATA Security			

<b>160 GB 5400 rpm 1.8" SATA Hard Drive</b>	<b>Drive Weight</b>	0.13 lbs (62 g)		
	<b>Capacity</b>	160 GB		
	<b>Height</b>	0.31 in (8 mm)		
	<b>Width</b>	2.12 in (54 mm)		
	<b>Interface</b>	ATA-8, SATA 2.6, 1.5 Gb/s		
	<b>Transfer Rate</b>	<b>Synchronous</b>	150 MB/s (Drive Capacity)	
		(maximum)		
	<b>Seek Time</b>	<b>Single Track</b>	3ms	
	(typical reads, including settling)	<b>Average</b>	15ms	
		<b>Maximum</b>	26ms	
	<b>Rotational Speed</b>	5400 rpm		
	<b>Logical Blocks</b>	312,581,808		
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]		
<b>Features</b>	ATA Security			

<b>160 GB 1.8-inch SATA Solid State Drive</b>	<b>Weight</b>	0.08 lbs (35 g)		
	<b>Capacity</b>	160 GB		
	<b>Height</b>	0.19 in (5 mm)		
	<b>Width</b>	2.12 in (54 mm)		
	<b>Interface</b>	ATA-7 / SATA 2.6		
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>	
		250 MB/s	70 MB/s	
	<b>Logical Blocks</b>	312,581,808		
	<b>Operating Temperature</b>	32° to 158° F (32° to 70° C) [case temp]		
<b>Features</b>	ATA Security			

### Technical Specifications

<b>80 GB 1.8-inch SATA Solid State Drive</b>	<b>Weight</b>	0.08 lbs (35 g)		
	<b>Capacity</b>	80 GB		
	<b>Height</b>	0.19 in (5 mm)		
	<b>Width</b>	2.12 in (54 mm)		
	<b>Interface</b>	ATA-7 / SATA 2.6		
	<b>Performance</b>	<b>Maximum Sequential Read</b>	<b>Maximum Sequential Write</b>	
		250 MB/s	70 MB/s	
	<b>Logical Blocks</b>	156,301,488		
	<b>Operating Temperature</b>	32° to 158°F (32° to 70°C) [case temp]		
	<b>Features</b>	ATA Security		

### Optical Drives

<b>DVD+/-RW SuperMulti DL Drive</b>	<b>Access Times</b>	Random	<150 ms CD (typical) <145 ms DVD (typical)	
	<b>Max Data Transfer Rate</b>	24X CD-ROM	Up to 3,600 KB/s	
		8X DVD	Up to 10,800 KB/s	
		24X CD-R	Up to 3,600 KB/s	
		16X CD-RW	Up to 2,400 KB/s	
		8X DVD+R	Up to 10,800 KB/s	
		4X DVD+R Dual Layer	Up to 5,400 KB/s	
		8X DVD+RW	Up to 10,800 KB/s	
		8X DVD-R	Up to 10,800 KB/s	
		4X DVD-R Dual Layer	Up to 5,400 KB/s	
		6X DVD-RW	Up to 8,100 KB/s	
	5X DVD-RAM	Up to 6,750 KB/s		
	<b>Transfer Mode</b>	UDMA Mode 5		
	<b>Interface</b>	Gen 1 SATA		
	<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM		
<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM			
<b>Max Media Capacity (read)</b>	8.5 GB			
<b>Max Media Capacity (write)</b>	8.5 GB			
<b>Transport</b>	Tray Loading			

### Security

### Technical Specifications

<b>HP Fingerprint Sensor</b>	<b>Mobile Voltage Operation</b>	3.0V-3.6V Single Supply
	<b>Operating Temperature</b>	32° - 158°F (0° - 70°C)
	<b>Current Consumption @ 3.3V</b>	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	<b>High-Rate Image Capture</b>	Up to 240 image frames /sec
	<b>ESD Resistance</b>	IEC 61000-4-2 Level 4 (±15KV)
	<b>Detection Matrix</b>	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

### Audio

<b>Hardware</b>	<b>Implementation</b>	IDT 92HD75B High Definition audio
	<b>Function Key Volume Controls</b>	Volume up, volume down, and mute
	<b>Full Duplex</b>	Yes

	Device Used	Operation
<b>Combo headphone/microphone jack</b>	Stereo Headphone	Headphone works. Integrated microphone works.
	External PC Microphone	External microphone does not work. Integrated microphone works.
	Combo headphone / microphone without "Answer" button	Headphone and microphone in headset work as advertised.
	Combo headphone / microphone with "Answer" button	Headphone and microphone in headset work initially whenever headset is plugged in; integrated microphone in PC is disabled. If "answer" button in pushed, microphone in headset is disabled, integrated microphone in PC is enabled.

<b>Integrated Stereo Microphones</b>	Yes
--------------------------------------	-----

<b>Audio Output Quality</b>	<b>Frequency Response</b>	20 Hz - 20 kHz
	<b>Signal to Noise Ratio</b>	>85 dB
	<b>Total Harmonic Distortion</b>	0.01%
	<b>Noise Floor</b>	-110 dB
	<b>Play/Record Sampling Rate(s)</b>	8 kHz - 48kHz
	<b>DAC</b>	16, 20 or 24-bit
	<b>ADC</b>	16 or 20-bit

### Technical Specifications

<b>Internal Stereo Speakers</b>	<b>Power Rating</b>	2.0 Watts
	<b>Impedance</b>	4 Ohms

### Communications

<b>Integrated Intel Gigabit Ethernet Features Network Connection</b> (10/100/1000 NIC)	<p>10 Mbit/s operation (10BASE-T; IEEE 802.3j; IEEE 802.3 clauses 13-14)</p> <p>100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)</p> <p>1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)</p> <p>Auto-Negotiation (Automatic Speed Selection)</p> <p>Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s</p> <p>IEEE 802.1p QoS (Quality of Service) Support</p> <p>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)</p>
<b>Power Management</b>	<p>ACPI compliant -- multiple power modes</p> <p>Situation-sensitive features reduce power consumption</p>
<b>Performance Features</b>	TCP/IP/UDP Checksum Offload (configurable)
<b>Manageability</b>	<p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)</p> <p>PXE 2.1 Remote Boot</p> <p>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))</p> <p>Comprehensive diagnostic and configuration software suite</p> <p>Intel Advanced Management Technology 6.0 (iAMT)</p>
<b>Interface</b>	PCI Express x1 based, SMBUS dedicated connection with Intel® 5 Series Chipset
<b>NIC Device Driver Name</b>	Intel 82577 Gigabit Network Connection

<b>V.92 56K Data/Fax Modem</b>	<b>Form Factor</b>	MDC 1.5 Daughtercard
	<b>Power Management Support</b>	APM Revision 1.2, ACPI
	<b>Approvals/Certifications</b>	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	<b>Data Mode Capabilities</b>	<p>V.92 data</p> <p>V.8bis</p> <p>V.80</p> <p>V44, V.42bis, MNP5 (Compression)</p> <p>V.42 (LAPM, MNP2-4) (Error Correction)</p> <p><b>Optional symbol rates:</b></p> <p>2800, 3429</p> <p>Asymmetric Symbol rates</p> <p><b>Synchronous primary channel data signaling rates:</b></p> <p>3600, 31200</p> <p>Automatic rate re-negotiation</p> <p>V.34</p> <p>V.32bis</p>



### Technical Specifications

	V.32
	V.23
	V.22bis
	V.22
	V.21
	Bell 212A
	Bell 103J
<b>Fax Mode Capabilities</b>	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
<b>Command Set</b>	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

#### HP un2420 EV-DO/HSPA Mobile Broadband Module

<b>Technology/Operating Bands</b>	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
<b>Wireless Protocol Standards</b>	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
<b>Wireless Parametric Standards</b>	Meets or exceeds TIA/EIA IS-98-D
<b>Maximum Data Rates</b>	UMTS (HSPA) - 7.2 Mbps (Download ), 2.0Mbps (Upload) CDMA (EVDO Release A) - 3.1 Mbps (Download), 1.8Mbps (Upload)
<b>GPS</b>	Standalone GPS enabled
<b>GPS Bands</b>	L1 - 1575.42 MHz
<b>Maximum Output Power</b>	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
<b>Maximum Power Consumption</b>	2500mA (peak); 1000mA (average)
<b>Power Consumption, Sleep Mode</b>	5 mA
<b>Power Management</b>	USB selective suspend Integrated notebook wireless button
<b>Antenna Type</b>	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	PCI-Express MiniCard, USB 2.0 interface
<b>Weight</b>	11.5 g

### Technical Specifications

<b>Dimensions</b> (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
<b>Voltage, Operating</b>	3.3v +/- 10%
<b>Temperature, Operating</b> (from TIA/EIA/IS-98-D)	-22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
<b>Temperature, Non-operating, 96 hours</b> (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
<b>Humidity, Non-operating</b>	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
<b>Configuration Utilities</b>	HP Connection Manager
<b>LED Activity</b>	LED Off - Radio Off; Solid LED On - Radio On

#### Intel Centrino Advanced-N 6200

<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*
	* In countries where 802.11n is not allowed, this capability is not enabled.
<b>Interoperability</b>	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
<b>Frequency Band</b>	2.4 GHz and 5GHz
<b>Antenna Structure</b>	2 transmit; 2 receive (2x2)
<b>Data Rates</b>	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
<b>Security<sup>1</sup></b>	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST)  Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2  Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK

### Technical Specifications

<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
<b>Output Power</b> (for CCK and OFDM) <sup>2</sup>	17 dBm max
<b>Power Consumption</b>	Transmit: 2.3 Watts (max, with two spatial streams) Receive: 1 Watt (max with two spatial streams) Idle mode <sup>3</sup> : 35 mW (average) Radio off: 20 mW (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity</b> <sup>4</sup>	54 Mbps: -76 dBm, 6 Mbps: -92 dBm
<b>Antenna Connections</b>	2 U.FL type connectors, 50 ohm nominal impedance
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.0075 lb (3.4 g)
<b>Dimensions</b>	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
<b>Operating Voltage</b>	3.3V +/- 9%
<b>Temperature</b>	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 90% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

<b>Broadcom 4322AGN 802.11a/b/g/n WiFi Adapter</b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n*
	<b>Interoperability</b>	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
	<b>Frequency Band</b>	2.4 GHz and 5 GHz
	<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
	<b>Frequency Support</b>	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands
	<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM

### Technical Specifications

<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power</b> (for CCK) <sup>2</sup>	17 dBm , nominal
<b>Output Power</b> (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm , nominal
<b>Power Consumption</b>	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	270 Mbps: -61dBm, , 54 Mbps: -72 dBm, 11 Mbps: -85 dBm , 1 Mbps: -92 dBm
<b>Antenna Connections</b>	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.013 lb (6 g)
<b>Dimensions</b>	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
<b>Operating Voltage</b>	3.3v +/- 10%
<b>Temperature</b>	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

<b>Broadcom 4312G 802.11b/g WiFi Adapter Standards</b>	<b>Wireless LAN</b>	IEEE 802.11b IEEE 802.11g
--	---------------------	------------------------------



### Technical Specifications

<b>Interoperability</b>	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
<b>Frequency Band</b>	2.4 GHz
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power</b> (for CCK) <sup>2</sup>	17 dBm , nominal
<b>Output Power</b> (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm , nominal
<b>Power Consumption</b>	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>3</sup></b>	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm
<b>Antenna Connections</b>	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	PCI-Express Half-MiniCard
<b>Weight</b>	0.013 lb (6 g)
<b>Dimensions</b>	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
<b>Operating Voltage</b>	3.3v +/- 10%
<b>Temperature</b>	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
<b>Altitude</b>	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

### Technical Specifications

- WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

<b>HP Integrated Module with Bluetooth 2.1 Wireless Technology</b>	<b>Bluetooth Specification</b>	2.1 Compliant
	<b>Dimensions</b>	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
	<b>Frequency Band</b>	2402 to 2480 MHz
	<b>Number of Available Channels</b>	79 (1 MHz) available channels
	<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	<b>Transmit Power</b>	-6 dBm to 4 dBm (Bluetooth Class II)
	<b>Receiver Sensitivity</b>	Better than -80 dBm at 0.1 % raw bit error rate
	<b>Power Consumption</b>	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
	<b>Antenna</b>	Internally integrated within module
	<b>Range</b>	Up 33 ft (10 m)
	<b>Electrical Interface</b>	USB 2.0 compliant Microsoft Windows Plug and Play compliant
	<b>Bluetooth Software Supported</b>	Broadcom Bluetooth for Windows Microsoft Windows Bluetooth Software
	<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves
	<b>Security</b>	Full support of Bluetooth Security Provisions
	<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
	<b>Temperature</b>	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
	<b>Humidity</b>	Operating 10% to 90% Non-operating 5% to 95%
	<b>Altitude</b>	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
	<b>Bluetooth Profiles Supported</b>	Serial Port Profile (SPP) <sup>1</sup> Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) <sup>1,2</sup> Generic Object Exchange Profile (GOEP) <sup>1,2</sup> Object Push Profile (OPP) <sup>1,2</sup>

### Technical Specifications

File Transfer Profile (FTP)  
 Synchronization Profile (SYNC)  
 Hard Copy Cable Replacement (HCRP)<sup>1,2</sup>  
 Personal Area Networking Profile (PAN)<sup>1,2</sup>  
 Human Interface Device Profile (HID)<sup>1,2,3</sup>  
 FAX Profile (FAX)  
 Basic Imaging Profile (BIP)<sup>2</sup>  
 Headset Profile (HSP)  
 Hands Free Profile (HFP)  
 Advanced Audio Distribution Profile (A2DP)

<sup>1</sup> indicates the profile is supported by Microsoft Windows XP SP2

<sup>2</sup> indicates the profile is part of Windows Vista

#### Environmental Data

#### Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Silver .where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

#### Energy Consumption

	115 VAC	230 VAC	100 VAC
Normal Operation	9.47 W	10.1 W	10.4 W
Sleep (Energy Star low power mode)	0.99 W	1.19 W	1 W
Off	0.34 W	0.46 W	0.35 W

#### Heat Dissipation\*

	115 VAC	230 VAC	100 VAC
Normal Operation	32 BTU/hr	35 BTU/hr	36 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	1 BTU/hr	2 BTU/hr	1 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

#### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	2.5	17.1
Fixed Disk (random writes)	2.5	16.9

System fan is usually off except when charging the battery

#### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight



### Technical Specifications

#### Additional information

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion

6-cell high capacity Lithium-Ion battery (optional 8 cell available)

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver level, see [www.epeat.net](http://www.epeat.net)

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 95% recycle-able when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Corrugated 280 g
  - Corrugated Carton 236 g
- Internal:
  - Polyethylene low density 13 g
- The Corrugated packaging material is made from 100% recycled content.
- The Corrugated Carton packaging material is made from 80% recycled content.
- The Polyethylene low density packaging material is made from 100% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment:

[\(http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/)

### Technical Specifications

[gen\\_specifications.html](#)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBEBs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:  
Global Citizenship Report  
<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>  
Environment website  
<http://www.hp.com/environment>  
Eco-label certifications  
<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>  
ISO 14001 certificates:  
<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

### *Technical Specifications*

Copyright © 2010 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel and Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.