


Overview


HP Compaq nx6310 Notebook PC

HP recommends Windows® XP Professional

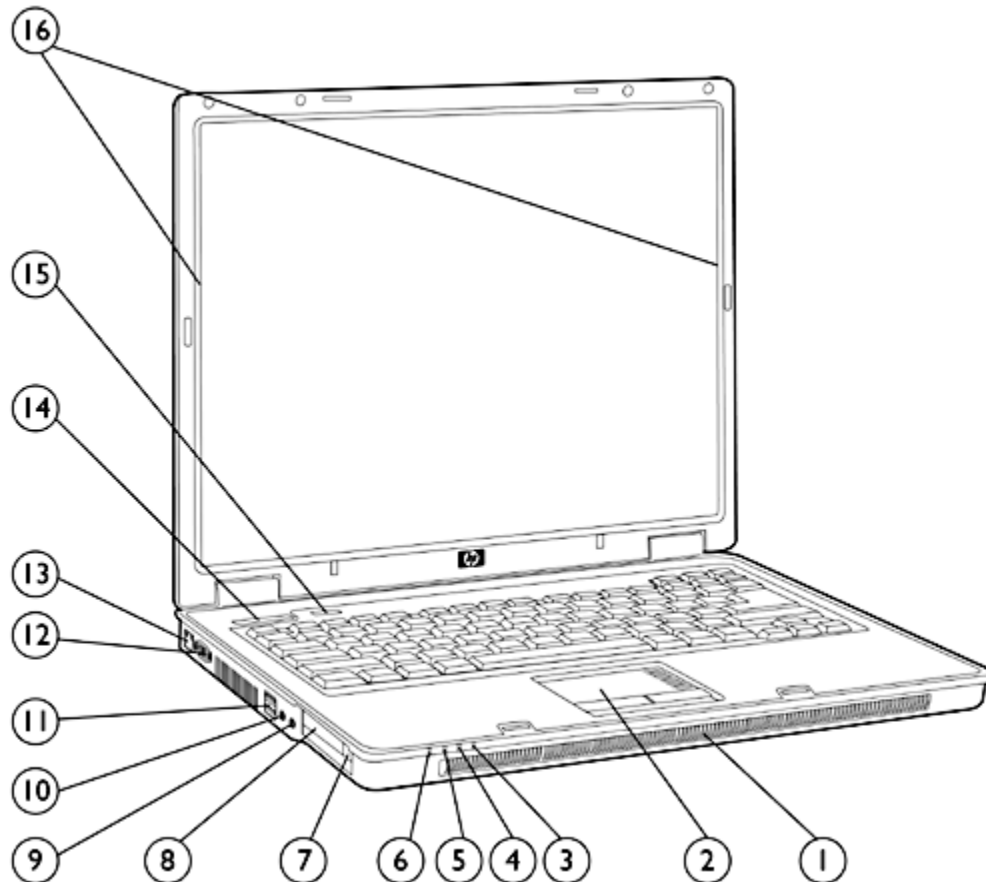

- | | |
|------------------------------|-------------------------------------|
| 1. Stereo Speakers | 9. Microphone Jack |
| 2. Touchpad with Scroll Zone | 10. Headphone Jack |
| 3. Hard Drive Activity LED | 11. 2 USB 2.0 Ports |
| 4. Battery Charging LED | 12. VGA/External Monitor Connector |
| 5. Power/Standby LED | 13. RJ-45 Port (NIC) |
| 6. Wireless On/Off LED | 14. Power Button with LED |
| 7. PC Card Eject Button | 15. Wireless On/Off Button with LED |
| 8. PC Card Slot | 16. Dual-band Wireless LAN Antennas |

Overview

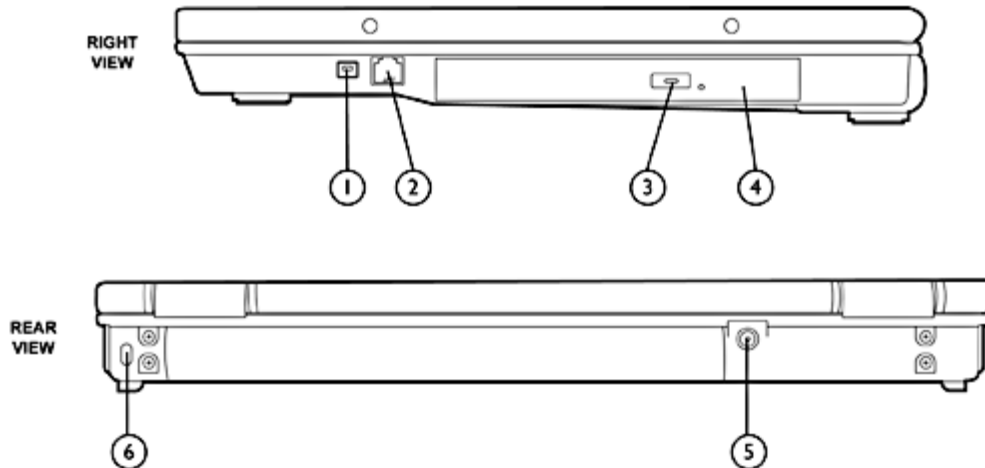

1. IEEE 1394a Port
2. RJ-11 Port (Modem)
3. Optical Drive Button

4. Optical Drive
5. DC Power Connector
6. Kensington Lock Slot

At A Glance

- Genuine Windows XP Professional, Genuine Windows XP Home Edition, or FreeDOS
- Intel® Core™ Duo Processors T2300e to T2500*, Intel® Core™ 2 Duo Processors T5500 to T7200,
- Intel Celeron M 410 to 440 processors
- Sleek industrial design starting at 2.7 kg and 30.3 mm thin at front
- Mobile Intel 945GM Express Chipset or Mobile Intel 940GML Express Chipset
- Supports up to 4GB** of 533- or 667-MHz DDR2 SDRAM, dual channel memory support
- Up to 100-GB 5400 rpm, user-removable hard drive
- Intel Graphics Media Accelerator 950
- Optional integrated 802.11 a/b/g or 802.11 b/g wireless LAN module and Bluetooth®
- Broadcom 10/100 Ethernet PCI Controller
- Touchpad with scroll zone
- Protected by one-year standard parts and labor warranty – certain restrictions and exclusions apply

* Intel's numbering system is not a measurement of higher performance. Intel Core Duo and Core Solo processors available with Intel 945GM Express Chipset only.

** 4-GB memory available with Intel 945GM Express Chipset only. Above 3-GB, all memory may not be available due to system resource requirements.

Standard Features

Processors	<p>Intel Core 2 Duo Processor T7200* (2.00-GHz, 667-MHz FSB, 4-MB L2 cache)</p> <p>Intel Core 2 Duo Processor T5600* (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)</p> <p>Intel Core 2 Duo Processor T5500* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)</p> <p>Intel Core Duo Processor T2500* (2.00-GHz, 667-MHz FSB, 2-MB L2 cache)</p> <p>Intel Core Duo Processor T2400* (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)</p> <p>Intel Core Duo Processor T2300E* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)</p> <p>Intel Core Duo Processor T2250* (1.73-GHz, 533-MHz FSB, 2-MB L2 cache) (select countries only)</p> <p>Intel Core Duo Processor T2050* (1.60-GHz, 533-MHz FSB, 2-MB L2 cache) (select countries only)</p> <p>Intel Core Solo Processor T1350* (1.86-GHz, 533-MHz FSB, 2-MB L2 cache) (select countries only)</p> <p>Intel Celeron M Processor 440* (1.86-GHz, 533-MHz FSB, 1-MB L2 cache)</p> <p>Intel Celeron M Processor 430* (1.73-GHz, 533-MHz FSB, 1-MB L2 cache)</p> <p>Intel Celeron M Processor 410* (1.46-GHz, 533-MHz FSB, 1-MB L2 cache)</p> <p>* Intel's numbering is not a measurement of higher performance. Intel Core Duo and Intel Core 2 Duo processors available with Intel 945GM Express Chipset only.</p> <p>NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.</p> <p>NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.</p>	
Operating System	Preinstalled	<p>Genuine Windows XP Professional SP2</p> <p>Genuine Windows XP Home Edition SP2</p> <p>FreeDOS</p>
	Supported	<p>Genuine Windows 2000 (drivers downloadable from http://www.hp.com)</p>
	Certified	<p>Novell Linux Desktop 9</p>
Chipset	<p>Mobile Intel 945GM Express Chipset with 667-MHz front side bus</p> <p>or</p> <p>Mobile Intel 940GML Express Chipset with 533-MHz front side bus</p>	
Graphics	<p>Intel Graphics Media Accelerator 950 with up to 224-MB shared system memory</p>	
Display	Internal	<p>15.0-inch XGA (1024 x 768 resolution and 16 M colors)</p> <p>15.0-inch XGA BrightView (1024 x 768 resolution and 16 M colors)</p>
	External	<p>Up to 32-bit per pixel color depth</p> <p>VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz</p> <p>NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.</p>
Memory	Standard	<p>256-MB, 512-MB, or 1024-MB 533-MHz or 667-MHz DDR2 SDRAM;</p> <p>two SODIMM slots supporting dual channel memory</p>
	Maximum	<p>Supports up to 4096-MB maximum (2048-MB 667-MHz SODIMM in slots 1 and 2; requires Intel 945GM Express Chipset)</p>



Standard Features

Dual-channel Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Above 3-GB, all memory may not be available due to system resource requirements.

Communications

Integrated Broadcom 10/100 Ethernet PCI Controller

56K V.92 modem* with digital line guard

* Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

Wireless Devices

Support for a broad range of secure, integrated wireless LAN options featuring support for the latest industry standards. Integrated Bluetooth is also an option (factory configurable only) and can be combined with any of the supported wireless LAN options.

All integrated wireless LAN options	<ul style="list-style-type: none"> WiFi certified Cisco Compatible Extensions support (Version 3.0) Wired Equivalent Privacy (WEP) support up to 128-bit keys WiFi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support WiFi certified for WPA2, WMM Dual antennas integrated in the display enclosure
Intel PRO/Wireless 3945ABG Network Connection	<ul style="list-style-type: none"> Intel Centrino mobile technology Integrated support for 802.11a, b and g Up to 54-mbps data rate
Intel PRO/Wireless 3945BG Network Connection	<ul style="list-style-type: none"> Intel Centrino mobile technology Integrated support for 802.11 b and g Up to 54-mbps data rate
Broadcom 4311AG WiFi Adapter	<ul style="list-style-type: none"> Integrated support for 802.11a, b and g Up to 54-mbps data rate
Broadcom 4311BG WiFi Adapter	<ul style="list-style-type: none"> Integrated support for 802.11 b and g Up to 54-mbps data rate
HP Integrated Module with Bluetooth 2.0 Wireless Technology	<ul style="list-style-type: none"> Bluetooth Specification v2.0 compliant Works with a wide range of Bluetooth devices

Keyboard

The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19-mm x 19-mm key pitch (center-to-center spacing), 2.5-mm stroke, comfort-dished keycaps, and bright key legends for improved visibility in low light conditions.

One-Touch Productivity

Provides one-touch access to control Wireless On/Off, with LED indicator



Standard Features

Buttons

Pointing Device Touchpad with scroll zone, two soft-touch pick buttons

Expansion Card Slots **One Type I/II PC Card slot** Supports 32-bit CardBus and 16-bit PC Cards

Storage

Hard Drives 40-, 60-, 80-, 100-GB 5400 rpm SMART SATA

NOTE: These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 8 GB is reserved for the system recovery software.

HP Mobile Data Protection System Hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive and protecting it during normal use from shock and vibration.

Fixed Optical Drives DVD-ROM
DVD/CD-RW Combo
DVD+/-RW SuperMulti with Double Layer
LightScribe DVD+/-RW with Double Layer

Interfaces

PC Card Slot One Type I/II

External Monitor One – VGA

IEEE 1394a Port One

External Microphone One

Headphone/Line out One

Power Connector One

RJ-11 (Modem) One

RJ-45 (NIC) One

USB 2.0 Two

Extended Life Battery Connector One

LED Status Indicators Ten

Audio

ADI High Definition CODEC
Integrated 16-bit Sound Blaster Pro compatible audio
Integrated stereo speakers
Stereo headphone/line out
Stereo microphone in

Software

Preinstalled Software Adobe Acrobat Reader

Microsoft Windows XP HP Backup and Recovery Manager
HP Help and Support Center
HP Mobile Print Driver
HP ProtectTools Security Manager:
BIOS Configuration for HP ProtectTools
Credential Manager for HP ProtectTools
HP Quick Launch Buttons
HP Wireless Assistant



Standard Features

Sonic Digital Media Plus:

- RecordNow! (for optional DVD+/-RW and DVD/CDRW drives)
- MyDVD (DVD Authoring for optional DVD+/-RW drives)

Synaptics Touchpad Driver

Symantec Norton Internet Security with complimentary 60-day live update
 Intervideo WinDVD – DVD Player (for optional DVD+/-RW, DVD/CDRW and DVD drives)

Additional software available from the Web

- Smart Card Security for HP ProtectTools
- Device Access Manager for HP ProtectTools

HP Backup and Recovery Manager

Each unit is shipped with HP Backup and Recovery Manager. HP Backup and Recovery Manager can provide data and system file protection for HP business PCs to enable fast recovery if the system becomes corrupted or if important information is accidentally deleted. HP Backup and Recovery Manager can perform scheduled or manual backups of the entire drive or individual files and folders. Up to 8 GB of the hard drive is reserved for the system recovery software. HP Backup and Recovery Manager can also create software recovery CDs or DVDs (requires optional hardware).

SMBIOS Version 2.4

System Management BIOS, previously known as DMI BIOS, is used to store system management information.

HP ProtectTools Security Manager

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available are:

- BIOS Configuration for HP ProtectTools
- Credential Manager for HP ProtectTools

Security

Standard Features

- HP ProtectTools Security Manager
- Configuration Control Hardware
- Memory Change Alert
- Ownership Tag
- Setup Password
- Power-On Password
- DriveLock
- HP Disk Sanitizer
- Kensington Lock Slot

For more information on HP security solutions refer to <http://www.hp.com/go/security>.

Power Supply

External 65-watt Smart AC adapter, 6-foot (1.8-meter) power cord included.
 Total length including External AC adapter is 12 feet (3.66 meter).
 HP Fast Charge Technology*

*Fast Charge Technology recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 12-cell Ultra-Capacity batteries.

Battery

- Primary Battery** 43Wh 6-cell high capacity Lithium-Ion
- Optional HP 8-Cell Extended Life Battery** 52Wh 8-cell high capacity Lithium-Ion
- Optional HP 12-Cell Ultra** 95Wh 12-cell high capacity Lithium-Ion



Standard Features

Capacity Battery

Battery Life	Primary Battery	Up to 4 hours and 30 minutes
	Primary Battery and optional HP 8-Cell Extended Life Battery	Up to 9 hours and 45 minutes
	Primary Battery and optional HP 12-Cell Ultra-Capacity Battery	Up to 13 hours
System Standby Time	Up to 1 week	
Power Conservation	Supports enhanced Intel SpeedStep technology on models with Mobile Intel 945GM Express Chipset that have Intel Core Duo processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)	
	Intel Display Power Saving technology	
	Hibernation	
	Standby	
	ACPI compliance	

Service and Support HP Services includes a one-year standard parts and labor warranty, pick-up or carry-in, and toll-free 7 x 24 hardware technical phone support. On-site service and warranty upgrades are also available.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Options

Memory	256-MB 533-MHz DDR2 SDRAM	PE830A
	512-MB 533-MHz DDR2 SDRAM	PE831A
	1024-MB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM	EM993AA
	1024-MB 667-MHz DDR2 SDRAM	EM994AA
	2048-MB 667-MHz DDR2 SDRAM	EM995AA
Other Storage	80-GB 5400 rpm Primary SATA Hard Drive	ET354AA
	HP SuperMulti (DL) DVD+/-RW LightScribe Drive	ET353AA
	HP USB Digital Drive + 128-MB Secure Digital Card	DL702A
	HP USB Digital Drive + 256-MB Secure Digital Card	DL702AA
	HP USB Diskette Drive	DC361B
Communications	Intel PRO/Wireless 3945ABG 802.11 a/b/g WLAN option kit	EX150AA#xxx
Expansion Solutions	HP 4-port USB 2.0 Hub	DG954A
Power	HP 2-bay Battery Charging Station	DT533A#xxx
	65W Smart AC Adapter	ED494AA#xxx
	90W Smart AC Adapter	ED495AA#xxx
	65W Air/Auto/AC Combo Adapter	ED993AA#xxx
	Primary 6-cell Battery Pack	PB994A
	HP 8-cell Extended Life Battery	PB993A
HP 12-cell Ultra-Capacity Battery	EJ092AA	
Carrying Cases	HP Entry Value Case	DL617A
	HP Top Load Nylon	DC915A
	HP Executive Leather case	PA847A
	HP Sport Backpack	DG102A
Security	HP PCMCIA Smart Card Reader	DC350B
	HP/Kensington Cable Lock	PC766A
Input/Output Devices	PS2 Keyboard	DT527A#xxx
	USB Keyboard	DT528A#xxx
	USB/PS2 Optical Mouse	DC369A
	HP USB Optical Travel Mouse	F2100A



Memory

Support for up to 2048 MB* of 533- or 667-MHz DDR2 SDRAM

Two DIMM slots

DIMM sizes supported: 256 MB, 512 MB, and 1024 MB

Standard Memory

- 256 MB (256 MB x 1)
- 512 MB (512 MB x 1 or 256 MB x 2)
- 1024 MB (1024 MB x 1 or 512 MB x 2)
- 2048 MB (1024 MB x 2)

Optional Memory Upgrades

Support for up to 2048 MB* of memory is available (with the installation of optional DDR2 SDRAM memory kits). Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
768 MB	512 MB	256 MB
1024 MB	1024 MB	Empty
1024 MB	512 MB	512 MB
1280 MB	1024 MB	256 MB
1536 MB	1024 MB	512 MB
2048 MB	1024 MB	1024 MB
2048 MB (1024 MB x 2)	2048 MB (1024 MB x 2)	2048 MB (1024 MB x 2)

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Memory Upgrades

256-MB 533-MHz DDR2 SDRAM	PE830A
512-MB 533-MHz DDR2 SDRAM	PE831A
1024-MB 533-MHz DDR2 SDRAM	PE832A
512-MB 667-MHz DDR2 SDRAM	EM993AA
1024-MB 667-MHz DDR2 SDRAM	EM994AA
2048-MB 667-MHz DDR2 SDRAM	EM995AA

* Above 3-GB, all memory may not be available due to system resource requirements.

Storage

Removable Media Drive Support

	Quantity Supported	Drive Bay
LightScribe DVD+/-RW Drive with Double Layer	One	Fixed optical drive bay
DVD+/-RW SuperMulti Drive with Double Layer	One	Fixed optical drive bay
DVD/CD-RW Combo Drive	One	Fixed optical drive bay
DVD-ROM Drive	One	Fixed optical drive bay

Hard Drive Support

	Quantity Supported	Drive Bay
Primary Hard Drives		
100-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
60-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
40-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxVxD)	1.2 (at front) x 12.9 x 10.5 in (30.3 (at front) x 328.6 x 266.7 mm)
	Weight	with 15.0-inch display 6.1 lb (2.77 kg)
	NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, 60-GB hard drive, 256-MB memory, and CD-ROM drive. Weight varies by configuration and components.	
Stand-Alone Power Requirements	Normal Operating Voltage	18.5 V
	Average Operating Power	12.5 W
	Max Operating Power	< 65 W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	Energy Star Compliant	Yes
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes	
UKRSERTCOMPUTER	Yes	

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)
	Weight	0.62 lb (280 g)



Technical Specifications

Input	100 to 240 VAC
	Input Efficiency 83% min at 115 VAC
	Input frequency range 47 to 63 Hz
	Input AC current 1.7 A at 90 VAC, 0.85 A at 180 VAC
Output	Output power 65W 65W
	DC output 18.5V
	Hold-up time 5 msec at 115 VAC input
	Output current limit <11A, Over voltage protection- 29V max automatic shutdown
Connector	3 pin/grounded, mates with interchangeable cords
Environmental Design	Operating temperature 32° to 104° F (0° to 40° C)
	Non-operating (storage) temperature -4° to 149° F (-20° to 65° C)
	Altitude 0 to 10,000 ft (0 to 3,048 m)
	Humidity 20% to 80%
	Storage Humidity 10% to 90%
EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF – over 200,000 hours at 25°C ambient condition.
Option Kit Contents	65W AC Adapter, power cable, warranty booklet

Optional HP 12-Cell Ultra-Capacity Battery	Dimensions (H x W x L)	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)	
	Weight	1.77 lb (0.803 kg)	
	Cells/Type	12-cell Lithium-Ion	
	Energy	Voltage	14.8V
		Watt-hour Capacity	95Wh
		Amp-hour Capacity	6.45Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	Smart Adapter	3 to 4 hours
System ON		4 to 5 hours (depending on system power consumption)	
Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery		

Optional HP 8-Cell Extended Life Battery	Dimensions (H x W x L)	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)	
	Weight	1.00 lb (0.455 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Voltage	14.4V
		Watt-hour Capacity	52Wh
		Amp-hour Capacity	3.6Ah
Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	



Technical Specifications

	Operating (Discharging)	14° to 140° F (-10° to 60° C)
	Non-operating	-4° to 140° F (-20° to 60° C)
Battery Re-Charge Time	System in OFF mode or Standby	3 hours
	System ON	3 to 5 hours (depending on system power consumption)
	HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF
Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	

43Wh Primary 6-Cell Battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)		
	Weight	0.715 lb (0.325 kg)		
	Cells/Type	6-cell Lithium-Ion		
	Energy	Voltage	10.8V	
		Watt-hour capacity	43Wh	
		Amp-hour capacity	4.0Ah	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours	
System ON		3 to 5 hours (depending on system power consumption)		
HP Fast Charge Technology		Charges the battery up to 90% within 1.5 hours when system is OFF		

15.0-Inch Color TFT SXGA+ Wide Viewing Angle Display	Active Area (W x H)	12.0 x 9.0 in (30.4 x 22.8 cm)		
	Diagonal Size	15.0 in (38.0 cm)		
	Surface Treatment	Anti-glare		
	Number of Colors	Up to 16M		
	Contrast Ratio	300:1 (typical)		
	Refresh Rate	60 Hz		
	Brightness	170 nit (typical)		
	Pixel Resolution	Pitch	0.217 mm	
		Format	1400 x 1050	
		Configuration	RGB Stripe	
	Backlight	CCFL		
	PPI	117		
Viewing Angle	±60° Horizontal, +40°/-45° Vertical (typical)			

15.0-Inch Color TFT XGA Display	Active Area (W x H)	12.0 x 9.0 in (30.4 x 22.8 cm)	
	Diagonal Size	15.0 in (38.0 cm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	



Technical Specifications

Contrast Ratio	300:1 (typical)		
Refresh Rate	60 Hz		
Brightness	150 nit (typical)		
Pixel Resolution	Pitch	0.296 mm	
	Format	1024 x 768	
	Configuration	RGB Stripe	
Backlight	CCFL		
PPI	86		
Viewing Angle	±45° Horizontal, ±25° Vertical (typical)		

15.0-Inch Color TFT XGA BrightView Display	Active Area (W x H)	12.0 x 9.0 in (30.4 x 22.8 cm)		
	Diagonal Size	15.0 in (38.0 cm)		
	Surface Treatment	BrightView		
	Number of Colors	Up to 16M		
	Contrast Ratio	300:1 (typical)		
	Refresh Rate	60 Hz		
	Brightness	150 nit (typical)		
	Pixel Resolution	Pitch	0.296 mm	
		Format	1024 x 768	
		Configuration	RGB Stripe	
Backlight	CCFL			
PPI	86			
Viewing Angle	±45° Horizontal, ±25° Vertical (typical)			

Hard Drives

100-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)		
	Capacity	100 GB		
	Height	0.37 in (9.5 mm)		
	Width	2.75 in (70 mm)		
	Interface	ATA-7 / SATA 1.0a		
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	3 ms	
		Average	13 ms	
		Maximum	24 ms	
	Rotational Speed	5400 rpm		
	Logical Blocks	195,371,568		
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]		
	Features	ATA Security		

80-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	



Technical Specifications

Width	2.75 in (70 mm)		
Interface	ATA-7 / SATA 1.0a		
Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)	
Seek Time (typical reads, including settling)	Single Track	3 ms	
	Average	13 ms	
	Maximum	24 ms	
Rotational Speed	5400 rpm		
Logical Blocks	156,301,488		
Operating Temperature	41° to 140° F (5° to 60° C) [case temp]		
Features	ATA Security		

60-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)		
	Capacity	60 GB		
	Height	0.37 in (9.5 mm)		
	Width	2.75 in (70 mm)		
	Interface	ATA-7 / SATA 1.0a		
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	3 ms	
		Average	13 ms	
		Maximum	24 ms	
	Rotational Speed	5400 rpm		
	Logical Blocks	117,231,408		
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]		
	Features	ATA Security		

40-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)		
	Capacity	40 GB		
	Height	0.37 in (9.5 mm)		
	Width	2.75 in (70 mm)		
	Interface	ATA-7 / SATA 1.0a		
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	3 ms	
		Average	13 ms	
		Maximum	24 ms	
	Rotational Speed	5400 rpm		
	Logical Blocks	78,165,360		
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]		
	Features	ATA Security		

Removable Storage Drives – Fixed Bay

DVD-ROM Drive	Access Times	Random	<116 ms CD
			<125 ms DVD



Technical Specifications

Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
	8X-DVD	10,800 KB/s
Transfer Mode	Multiword DMA Mode 2	
Interface	EIDE	
Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
Supported Media (write)	None	
Max Media Capacity (read)	4.7 GB	
Transport	Tray Loading	

DVD/CD-RW Combo Drive	Access Times	Random	<110 ms CD <130 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		24X CD-RW	3,600 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW	
	Max Media Capacity (read)	8.5 GB	
Max Media Capacity (write)	700 MB		
Transport	Tray loading		

LightScribe DVD+/-RW Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		10X CD-RW	1,500 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	



Technical Specifications

Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW
Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, LightScribe
Max Media Capacity (read)	8.5 GB
Max Media Capacity (write)	8.5 GB
Transport	Tray Loading

DVD+/-RW SuperMulti Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		10X CD-RW	1,500 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
	5X DVD-RAM	6,750 KB/s	
	Transfer Mode	Multiword DMA Mode	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM		
Max Media Capacity (read)	8.5 GB		
Max Media Capacity (write)	8.5 GB		
Transport	Tray Loading		

Audio

Hardware	Implementation	ADI1981HD High Definition CODEC
	Full Duplex	Yes
	Sound Blaster Pro compatible	Yes
	Microphone Jack	Stereo or mono
	Headphone/Line Out Jack	Stereo



Technical Specifications

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz– 48 kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Internal Speaker	Power Rating	2 Watts
	Impedance	4 Ohms

Communications

Integrated Broadcom 10/100 Ethernet PCI Controller (BCM4401)	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Power Management	ACPI compliant -- multiple power modes Situation-sensitive features reduce power consumption
	Manageability	Wake-on-LAN from standby and hibernation (configurable; Magic Packet and Microsoft Wake-Up Frame) PXE 2.1 Remote Boot Statistics Gathering (RMON, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite
	Interface	32-bit PCI, 33-MHz
	NIC Device Driver Name	Broadcom 440X 10/100 Integrated Controller
	Drivers Available	Microsoft Windows XP Microsoft Windows 2000

V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data V.8bis V.80



Technical Specifications

V44, V.42bis, MNP5 (Compression)

V.42 (LAPM, MNP2-4) (Error Correction)

Optional symbol rates:

2800, 3429

Asymmetric Symbol rates

Synchronous primary channel data signaling rates:

3600, 31200

Automatic rate re-negotiation

V.34

V.32bis

V.32

V.23

V.22bis

V.22

V.21

Bell 212A

Bell 103J

Fax Mode Capabilities

TIA/EIA-578-B (Class 1)

T.30, T.4 (Group 3)

V.17

V.29

V.27ter

V.21 Channel 2

Command Set

V.250 (Partial)

TIA-602

Identification: +GMI, +GMM, +GMR

Port control: +IPR, +ICF, +IFC, +ILRR

Modulation: +MS, +MR, +MA

Error control: +ES, +ER, +EB, +ESR, +ETBM

Data compression: +DS, +DR

V.251

**Broadcom 4311BG
802.11b/g WIFI
Adapter**

Wireless LAN Standards

IEEE 802.11b

IEEE 802.11g

Interoperability

Wi-Fi certified

Cisco Compatible Extensions Program compliant
(details at www.hp.com/go/notebooks/WLAN)

Frequency Band

2.4 GHz

Data Rates

802.11b: 1, 2, 5.5, 11 Mbps

802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

Modulation

Direct Sequence Spread Spectrum

DBPSK, DQPSK, CCK, OFDM

Security¹

Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM.

Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).

Sub-channels

Multinational support with frequency bands and channels compliant to



Technical Specifications

	local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CKK) ²	17.5 dBm	
Output Power (for OFDM; power varies by data rate) ²	15 dBm	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode ³ : 390 mW (nominal) Sleep mode: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software suppliers. 	

Technical Specifications

Intel PRO/Wireless 3945ABG 802.11a/b/g Network Connection	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g	
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)	
	Frequency Band	2.4 GHz and 5 GHz	
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM	
	Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM.	
		Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
	Roaming	IEEE 802.11 compliant roaming between access points	
	Output Power (for CCK)²	15 dBm	
	Output Power (for OFDM; power varies by data rate)²	15 dBm	
	Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode ³ : 150 mW (nominal) Sleep mode: 30 mW (max)	
	Power Management	ACPI compliant power management 802.11 compliant power saving mode	
	Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
	Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
	Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
		802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
		802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	Form Factor	PCI-Express MiniCard	
	Weight	0.013 lb (6 g)	
	Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	



Technical Specifications

Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet (required for Cisco Compatible Extensions support) 	

LED Activity LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.

Intel PRO/Wireless 3945BG 802.11b/g Network Connection	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM.
		Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CKK)²	15 dBm
	Output Power (for OFDM);	15 dBm
	power varies by data	



Technical Specifications

	rate) ²	
Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode ³ : 150 mW (nominal) Sleep mode: 30 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet (required for Cisco Compatible Extensions support) 	

LED Activity LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software suppliers.

HP Integrated Module with Bluetooth Wireless Technology

Bluetooth Specification	2.0 Compliant
Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps



Technical Specifications

	asymmetric or 1306.9 kbps symmetric	
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)	
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate	
Power Consumption	Peak (Tx) 264 mW	
	Peak (Rx) 231 mW	
	Sleep <1 mW	
Antenna	Internally integrated within module	
Range	Up 33 ft (10 m)	
Electrical Interface	USB 2.0 compliant	
	Microsoft Windows Plug and Play compliant	
OS Support	Microsoft Windows XP Professional and Home	
	Microsoft Windows 2000	
Bluetooth Software Supported	Broadcom Bluetooth for Windows	
	Microsoft Windows XP Bluetooth Software	
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves	
Security	Full support of Bluetooth Security Provisions	
Power Management	Microsoft Windows ACPI, and USB Bus Support	
	Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark	
Temperature	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90%
	Non-operating	5% to 95%
Altitude	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software)	
	Serial Port Profile (SPP)*	
	Dial-Up Networking (DUN)*	
	Generic Object Exchange Profile (GOEP)	
	Object Push Profile (OPP)*	
	File Transfer Profile (FTP)	
	Synchronization Profile (SYNC)	
	Hard Copy Cable Replacement (HCRP)*	
	Personal Area Networking Profile (PAN)*	
	Human Interface Device Profile (HID)*	
	FAX Profile (FAX)	
	Basic Imaging Profile (BIP)	
	Headset Profile (HSP)	

Technical Specifications

Hands Free Profile (HFP)

Advanced Audio Distribution Profile (A2DP)

* indicates the profile is also supported by Microsoft Windows XP SP2

Environmental Data

EcoLabel Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- US Federal Energy Management Program (FEMP)
- Taiwan Green Mark
- China Energy Conservation Program
- IT ECO declaration

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook."

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	23.0 W	23.5 W	23.0 W
Sleep (Energy Star low power mode)	1.72 W	1.88 W	1.73 W
Off	1.90 W	1.90 W	1.98 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	78 BTU/hr	80 BTU/hr	78 BTU/hr
Sleep	5.9 BTU/hr	6.4 BTU/hr	5.9 BTU/hr
Off	6.5 BTU/hr	6.8 BTU/hr	6.5 BTU/hr

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.2	23
Fixed Disk (random writes)	3.8	24

Batteries

This product complies with ISO standards:

EU Directive 91/ 157/ EEC

EU Directive 93/ 86/ EEC

EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

Mercury greater than 5ppm by weight

Cadmium greater than 10ppm by weight

Lead greater than 4000 ppm by weight.



Technical Specifications

	Battery type and chemistry used in the product:
	Primary battery 6-cell high capacity Lithium-Ion battery pack
	Real Time Clock battery CR2032 (coin cell), Lithium
Additional Information	This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC. This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412 Input devices of this product comply with ISO 9241, part 9. Plastics parts weighing over 0.055 pounds (25 grams) used in the product are marked per ISO 11469 and ISO1043. This product contains 0% recycled materials (by wt.) This product is greater than 85% recycle-able when properly disposed of at end of life.
Packaging	Packaging Materials <ul style="list-style-type: none">• External:<ul style="list-style-type: none">○ Corrugated Paper – 2.03 lb (920 g)• Internal:<ul style="list-style-type: none">○ Corrugated Paper – 1.84 lb (835 g)○ EPE Foam – 0.12 lb (55 g)○ LDPE Bag – 0.01 lb (5 g)• The corrugated paper packaging materials contains at least 80% recycled content. HP follows these guidelines to decrease the environmental impact of product packaging: <ul style="list-style-type: none">• Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.• Eliminate the use of ozone-depleting substances (ODS) in packaging materials.• Design packaging materials for ease of disassembly.• Maximize the use of post-consumer recycled content materials in packaging materials.• Use readily recyclable packaging materials such as paper and corrugated materials.• Reduce size and weight of packages to improve transportation fuel efficiency.• Plastic packaging materials are marked according to ISO 11469



Technical Specifications

and DIN 6120 standards.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

(http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management and Recycling

HP offers our customers several other options for handling their aging computers while also minimizing the impact on the environment-including product trade-in and leasing services-in addition to recycling services. Please go to: <http://www.hp.com/recycle>, or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>



Technical Specifications

Copyright © 2006 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core Duo, Centrino, and SpeedStep are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

