



Windows®. Life without Walls™. HP recommends Windows.

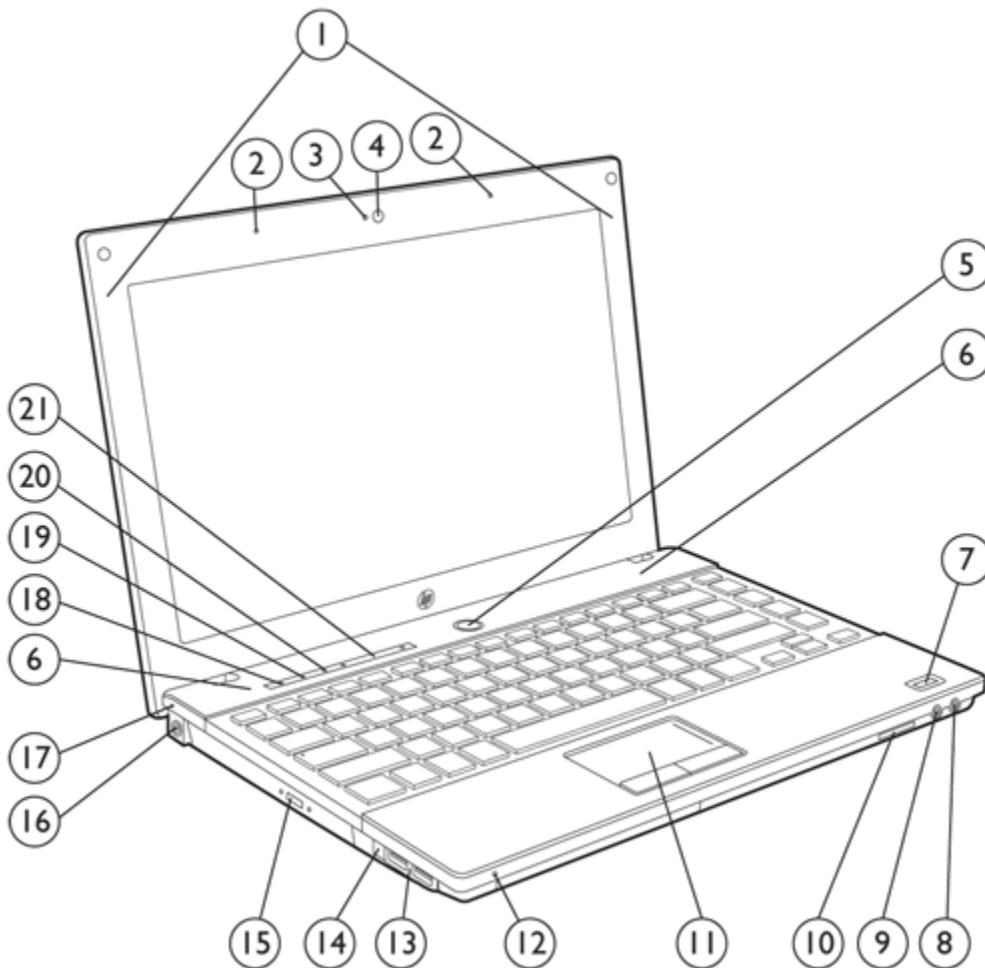


- | | |
|--|--|
| 1. WLAN and WWAN antennas (select models) | 12. Hard drive activity LED indicator |
| 2. Dual-microphone array | 13. (2) USB 2.0 ports |
| 3. Webcam light (works with optional webcam) | 14. Optional RJ-11/modem port |
| 4. Optional 2 MP webcam | 15. Optical drive |
| 5. Power button with LED indicator | 16. Power connector |
| 6. Stereo speakers | 17. Battery charging LED indicator |
| 7. Optional HP Fingerprint Sensor | 18. HP Info Center/HP Quick Look 3 button |
| 8. Stereo microphone in | 19. Wireless switch with LED indicator |
| 9. Stereo headphone/line out | 20. Volume mute button with LED indicator |
| 10. Secure Digital slot (SD/MMC) | 21. Volume scroll zone with up/down LED indicators |
| 11. Touchpad with scroll zone | |

Overview

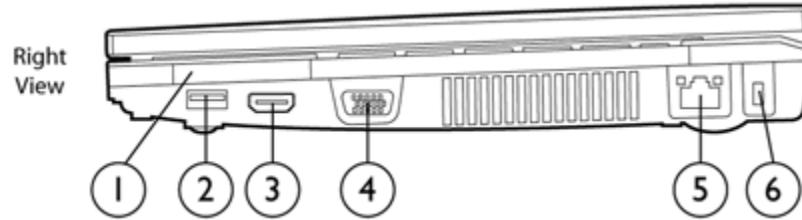

1. ExpressCard/34 slot
2. USB 2.0 port
3. HDMI port
4. VGA connector (external monitor/projector)
5. RJ-45/Ethernet port
6. Kensington Lock slot

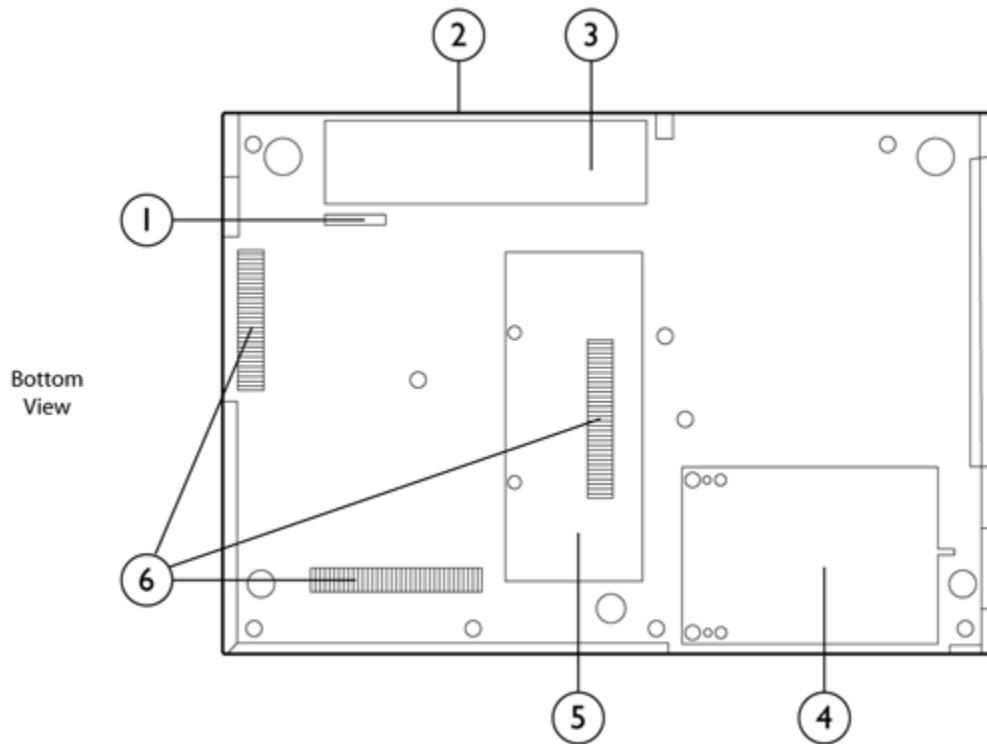

1. Battery release latch
2. Battery bay
3. SIM slot for WWAN (select models) – inside battery bay
4. Hard drive bay
5. Memory module compartment
6. Vents

Overview

At A Glance

- Genuine Windows 7 versions offered when Windows 7 is generally available, Genuine Windows Vista versions, Genuine Windows XP Professional available through downgrade rights from Windows Vista Business or Windows 7 Professional), Red Flag Linux (PRC only), or FreeDOS
- Sleek, slim design starting at 4.05 lb/1.84 kg with no optical drive (4.34 lb/1.97 kg with optical drive) and 1.07 in/27.3 mm thin at front
- Choice of Merlot or glossy Noir (black) finish
- Widescreen 13.3-inch diagonal HD LED-backlit display with 16:9 aspect ratio, BrightView optional
- Flexible wireless connectivity options:
 - Integrated HP un2400 EV-DO/HSDPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology, or HP un2420 Mobile Broadband Module for worldwide Gobi mobile Internet technology with GPS
 - Integrated 802.11 a/b/g/n, b/g/n, or b/g wireless LAN module
 - Bluetooth® 2.1
- ATI Mobility Radeon HD 4330 discrete graphics or Mobile Intel Graphics Media Accelerator 4500MHD integrated graphics
- HDMI port for connecting to high-resolution displays
- Available with Intel® Core™2 Duo processor
- Optional optical drives include Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive for high-definition playback and burning custom labels directly to your discs
- Integrated Secure Digital slot supports SD and MMC media formats
- Enhanced security features including optional HP Fingerprint Sensor, HP ProtectTools Security Manager, Disk Sanitizer, HP SpareKey, and HP Privacy Filter
- Optional integrated 2 MP webcam
- Up to 500 GB hard drive with HP 3D DriveGuard protection
- Up to 8 GB of 1066/1333 MHz DDR3 SDRAM supported, dual channel memory support

Standard Features

Processors

(Availability depends on chipset and wireless configuration)

- Intel Core 2 Duo Processor T9600 (2.8 GHz, 6 MB L2 cache, 1066 MHz FSB)
- Intel Core 2 Duo Processor P8700 (2.53 GHz, 3 MB L2 cache, 1066 MHz FSB)
- Intel Core 2 Duo Processor P7570 (2.26 GHz, 3 MB L2 cache, 1066 MHz FSB)
- Intel Core 2 Duo Processor P7370 (2.0 GHz, 3 MB L2 cache, 1066 MHz FSB)
- Intel Core 2 Duo Processor T6570 (2.10 GHz, 2 MB L2 cache, 800 MHz FSB)
- Intel Core 2 Duo Processor T5870 (2.00 GHz, 2 MB L2 cache, 800 MHz FSB)
- Intel Pentium Processor T4400 (2.2 GHz, 1 MB L2 cache, 800 MHz FSB)
- Intel Pentium Processor T4300 (2.1 GHz, 1 MB L2 cache, 800 MHz FSB)
- Intel Celeron® Processor T3100 (1.9 GHz, 1 MB L2 cache, 800 MHz FSB)
- Intel Celeron Processor T3000 (1.8 GHz, 1 MB L2 cache, 800 MHz FSB)
- Intel Celeron Processor T1700 (1.83 GHz, 1 MB L2 cache, 667 MHz FSB)
- Intel Celeron Processor T1600 (1.66 GHz, 1 MB L2 cache, 667 MHz FSB)

NOTE: Intel's numbering is not a measurement of higher performance. Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

Operating System

Preinstalled

- Genuine Windows 7 Professional Edition 32*
- Genuine Windows 7 Home Premium Edition 32*
- Genuine Windows 7 Home Basic Edition 32*
- Genuine Windows 7 Starter 32*
- Genuine Windows XP Professional available through downgrade from Windows 7 Professional*†
- Genuine Windows Vista Business 32**
- Genuine Windows Vista Home Basic 32**
- Genuine Windows Vista Home Premium 32**
- Genuine Windows XP Professional available through downgrade from Windows Vista Business**††
- Red Flag Linux (PRC only)
- FreeDOS

Supported

- Genuine Windows 7 Professional 64*
- Genuine Windows Vista Business 64**

Certified

- SuSE Linux Enterprise Desktop 10

* Offered when Windows 7 is generally available. System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality.

See <http://www.microsoft.com/windows/windows-7/> for details.

** Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.aspx> and: <http://www.microsoft.com/windowsvista/getready/capable.aspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

† Windows 7 disk may be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image.

†† Windows Vista Business disk may be included for future upgrade if desired. To qualify for this

Standard Features

downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image.

Chipset	<p>Mobile Intel PM45 Express Chipset with ICHM9, 1066 MHz front side bus (models with discrete graphics)</p> <p>or</p> <p>Mobile Intel GM45 Express Chipset with ICHM9, 1066 MHz front side bus (models with integrated graphics)</p> <p>or</p> <p>Mobile Intel GL40 Express Chipset , 667 MHz front side bus (models with integrated graphics)</p>
---------	---

Graphics	<p>Models with Mobile Intel PM45 Express chipset:</p> <ul style="list-style-type: none"> - ATI Mobility Radeon HD 4330 discrete graphics with 512 MB dedicated video memory - up to 1024 MB HyperMemory* in units with Windows XP and 2 GB or more of system memory - up to 1280 MB HyperMemory* in units with Windows Vista Business and 2 GB or more of system memory <p>Models with Mobile Intel GM45 or GL40 Express chipset:</p> <ul style="list-style-type: none"> - Mobile Intel Graphics Media Accelerator 4500MHD integrated graphics - up to 1024 MB of total graphics memory* in units with Windows XP and 2 GB or more of system memory - up to 1759 MB of total graphics memory* in units with Windows Vista Business and 4 GB or more of system memory <p>Microsoft DirectX 10.1 (discrete), 10 (integrated) capable</p> <p>*Indicates dedicated video memory and shared system memory.</p>
----------	---

Display	<table> <tr> <td style="vertical-align: top;">Internal</td> <td> <p>13.3-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution)</p> <p>13.3-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)</p> <p>13.3-inch diagonal LED-backlit HD 720p BrightView (1280 x 720 resolution)</p> </td> </tr> <tr> <td style="vertical-align: top;">External</td> <td> <p>Up to 32-bit per pixel color depth</p> <p>VGA port supports resolutions up to 1600 x 1200 at 75 Hz, and lower resolutions at up to 100 Hz.</p> <p>HDMI 1.3 port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).</p> <p>NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.</p> </td> </tr> </table>	Internal	<p>13.3-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution)</p> <p>13.3-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)</p> <p>13.3-inch diagonal LED-backlit HD 720p BrightView (1280 x 720 resolution)</p>	External	<p>Up to 32-bit per pixel color depth</p> <p>VGA port supports resolutions up to 1600 x 1200 at 75 Hz, and lower resolutions at up to 100 Hz.</p> <p>HDMI 1.3 port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).</p> <p>NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.</p>
Internal	<p>13.3-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution)</p> <p>13.3-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)</p> <p>13.3-inch diagonal LED-backlit HD 720p BrightView (1280 x 720 resolution)</p>				
External	<p>Up to 32-bit per pixel color depth</p> <p>VGA port supports resolutions up to 1600 x 1200 at 75 Hz, and lower resolutions at up to 100 Hz.</p> <p>HDMI 1.3 port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).</p> <p>NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.</p>				

Standard Features

Memory	Standard	1 GB, 2 GB, 3 GB, or 4 GB* of 1066/1333 MHz DDR3 SDRAM; two SODIMM slots supporting dual channel memory
	Maximum	Upgradeable to 8 GB** total memory
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

* Full availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

** 8 GB maximum requires Mobile Intel GM45 or PM45 Express Chipset.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Communications	Marvell Ethernet (10/100/1000 NIC)* Optional 56K V.92 modem**	
		* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.
		** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

Wireless Devices	Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Wireless LAN is factory configurable or available as an option to be added later. Mobile Broadband (WWAN) requires Windows Vista Business or Windows XP Professional and is available in select countries as a factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.	
	HP un2400 EV-DO/HSPA Mobile Broadband Module	Integrated WWAN module with Gobi global mobile Internet technology that provides worldwide connection to both CDMA (EVDO) and UMTS (HSPA) wireless networks. NOTE: Separately purchased mobile network operator service is required. Two 850/900/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.
	HP un2420 EV-DO/HSPA Mobile Broadband Module	Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications. NOTE: Separately purchased mobile network operator service is required. Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.
	All 802.11 integrated wireless LAN options	Wi-Fi certified* Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support Dual antennas integrated in the display enclosure

Standard Features

Intel WiFi Link 5100	Integrated support for 802.11a, b, g, and n* Cisco Compatible Extensions support Up to 450 mbps data rate
Intel WiFi Link 1000	Integrated support for 802.11 b, g, and n* Cisco Compatible Extensions support Up to 300 mbps data rate
Broadcom 4322AGN 802.11a/b/g/n WiFi Adapter	Integrated support for 802.11a, b, g, and n Cisco Compatible Extensions support Up to 300 mbps data rate
Broadcom 4312G 802.11b/g WiFi Adapter	Integrated support for 802.11 b and g Cisco Compatible Extensions support Up to 54 mbps data rate
HP Integrated Module	Bluetooth Specification v2.1 compliant with Bluetooth WirelessWorks with a wide range of Bluetooth devices Technology

* In countries where 802.11n is not allowed, this capability is not enabled.

Keyboard

The HP spill-resistant keyboard is designed using a Mylar film that minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include a full numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19.05 x 19.05 mm key pitch (center-to-center spacing), 3.0 mm stroke, and comfort-dished keycaps.

Pointing device

Touchpad with scroll zone, two pick buttons

Expansion card slots

ExpressCard/34 slot	Supports ExpressCard/34 (34 mm x 75 mm x 5 mm) card sizes
Secure Digital slot	Supports SD (Secure Digital), MMC (MultiMedia Card)

Storage

Internal Storage Device 320/500 GB 5400 rpm, 160/250/320/500 GB 7200 rpm SMART SATA II Hard Drive

NOTE: Up to 10 GB is reserved for the system recovery software.

HP 3D DriveGuard (Windows models only) The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

Fixed optical drives Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive*
DVD+/-RW SuperMulti DL LightScribe Drive
DVD-ROM Drive

* Models with integrated graphics require Mobile Intel GM45 Express chipset and Windows Vista to support the Blu-ray DVD drive; models with discrete graphics support it with either Windows Vista or Windows XP.

Standard Features

Interfaces	External monitor	One (VGA)
	HDMI	One – 1.3 compliant
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem (optional)	One
	RJ-45/Ethernet	One
	USB 2.0	Three
	LED status indicators	Thirteen

Audio/Visual	High Definition Audio support
	Integrated stereo speakers
	Integrated dual-microphone array
	Stereo headphone/line out
	Stereo microphone in
	Optional 2 MP webcam
	<ul style="list-style-type: none">• Supports videoconferencing and still image capture• Improved quality for video streaming and still image capture (1600x1200 resolution)• Up to 30 frames/sec• Fixed focus lens• 16-bit true color (camera sensor up to UXGA resolution)

Software	Preinstalled software with Windows Vista	HP Recovery Manager
		HP Help and Support Center
		HP ProtectTools Security Manager
		HP Quicklaunch Buttons Software
		HP Quicklook 3
		HP Connection Manager 3.0
		HP Wireless Assistant
		HP 3D DriveGuard
		Microsoft Office Ready with 60-day Office Professional 2007 Trial Edition (select models)
		PDF Complete SE
		Intervideo WinDVD – DVD Player
		Roxio Creator Business (for optional DVD+/-RW and DVD/CDRW drives)
		McAfee Total Protection*
		Microsoft Windows Live Messenger (select models)
		HP Webcam Software (with optional 2 MP webcam)
		HP Support Assistant

Additional software available from the web

- HP SoftPaq Download Manager

* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

Standard Features

HP Recovery Manager Models shipped with Windows Vista include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 10 GB of the hard drive is reserved for the system recovery software.

HP ProtectTools Security Manager HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:

- BIOS Configuration for HP ProtectTools
 - Credential Manager for HP ProtectTools
 - Device Access Manager for HP ProtectTools
 - Drive Encryption for HP ProtectTools
 - File Sanitizer for HP ProtectTools
 - LoJack Pro for HP ProtectTools
 - Privacy Manager for HP ProtectTools
-

Security	Standard Features	HP ProtectTools Security Manager Enhanced Pre-Boot Security HP SpareKey Disk Sanitizer Setup Password Power-On Password HP 3D DriveGuard (Windows models only) Kensington Lock Slot HP Privacy Filter (must be purchased separately)
	Optional Features	HP Fingerprint Sensor

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

Power Supply	External 65-watt Smart AC adapter
	External 90-watt Smart AC adapter (discrete graphics only) 6-foot (1.8-meter) power cord included; total length including external AC adapter is 12 feet (3.66 meter) HP Fast Charge*

* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off.

Battery	Primary battery	4-cell (37 WHr) Li-Ion battery
		8-cell (73 WHr) Li-Ion battery

Standard Features

Battery Life

8-cell (73 WHr)

4-cell (37 WHr)

Primary battery

Up to 7 hours

Up to 5 hours 15 minutes

NOTE: The listed battery life measurements were taken on models running Microsoft Windows XP. Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

System Standby Time

Up to 1 week

Power Conservation

Supports enhanced Intel SpeedStep technology with Intel Core 2 Duo (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)

ATI PowerPlay technology

Hibernation

Standby

ACPI compliance

Service and Support

HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country; 1-year limited warranty on primary battery. Warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Options

Memory	HP 1 GB (DDR3 1066/1333 MHz) SODIMM	TBD
	HP 2 GB (DDR3 1066/1333 MHz) SODIMM	TBD
	HP 4 GB (DDR3 1066/1333 MHz) SODIMM	TBD
Storage	HP Notebooks USB Diskette Drive	DC361B
	HP 250 GB USB Pocket Media Hard Drive	FE477AA
	HP External USB CD/DVD R/RW Drive	FS943AA
Communication	HP WLAN 802/11 a/b/g/n Mini-card Kit	KM591AA#xxx
Expansion	HP USB 2.0 Docking Station	FQ834AA
	HP USB Essential Port Replicator	AQ731AA
	HP Basic Adjustable Stand	AL549AA
Power	HP 90W Smart AC Adapter	ED495AA#xxx
	HP 65W Smart AC Adapter	ED494AA#xxx
	HP 4-cell Primary Battery	TBD
	HP 8-cell Primary Battery	TBD
Carrying Cases	HP Basic Carrying Case	AJ078AA
	HP Basic Backpack	AM863AA
	HP Basic Messenger	AP355AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA
Security	HP/Kensington MicroSaver Security Lock	PC766A
	HP Privacy Filter	TBD
Input/Output Devices	HP USB Keyboard & Mouse Bundle	RC465AA#xxx
	HP Merlot Mouse	AU094AA
	HP Merlot Mouse Pad	VE973AV
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Optical Travel Mouse	RH304AA
	HP Mobile Audio Speakers	FS944AA
	HP Bluetooth Stereo Headphones	AR085AA
	HP Wireless Optical Mouse	AR084AA

Memory

1066/1333 MHz DDR3 SDRAM

Two DIMM slots supporting dual channel memory

DIMM sizes supported: 1024 MB, 2048 MB, and 4096 MB

- Standard Memory
- 1024 MB (1024 MB x 1)
 - 2048 MB (2048 MB x 1 or 1024 MB x 2)
 - 3072 MB (2048 MB x 1024 MB)
 - 4096 MB (2048 MB x 2)

Optional Memory Upgrades Support for up to 8192 MB of memory with the installation of optional SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
1024 MB	1024 MB	Empty
2048 MB	1024 MB	1024 MB
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
8192 MB	4096 MB	4096 MB

NOTE: This chart does not represent all possible memory configurations. Full availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Memory Upgrades	HP 1 GB (DDR3 1066/1333 MHz) SODIMM	TBD
	HP 2 GB (DDR3 1066/1333 MHz) SODIMM	TBD
	HP 4 GB (DDR3 1066/1333 MHz) SODIMM	TBD

Storage

Removable Media Drive Support

	Quantity Supported	Drive Bay
Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive*	One	Fixed optical drive bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Fixed optical drive bay
DVD-ROM Drive	One	Fixed optical drive bay

* Models with integrated graphics require Mobile Intel GM45 Express chipset and Windows Vista to support the Blu-ray DVD drive; models with discrete graphics support it with either Windows Vista or Windows XP.

Internal Storage Device

	Quantity Supported	Drive Bay
Hard Drives		
500 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
500 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
160 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	1.07 in (at front) x 12.79 in x 8.97 in 27.3 mm (at front) x 325 mm x 228 mm
	Weight	Starting at 4.05 lb (1.84 kg) with no optical drive; 4.34 lb (1.97 kg) with optical drive
	<p>NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 4-cell battery, hard drive, and optical drive. Weight varies by configuration and components.</p>	
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	with integrated graphics: TBD W with discrete graphics: TBD W
	Max Operating Power	< 90 W or < 65W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered Gold in United States**
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes

Technical Specifications

UKRSERTCOMPUTER Yes

* Configurations of the HP ProBook 4310s that are ENERGY STAR qualified are identified as HP ProBook 4310s ENERGY STAR on HP websites and on www.energystar.gov.

** EPEAT Gold Registered in U.S. EPEAT registration varies by country. See www.epeat.net for registration status by country.

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

HP 90W Smart AC Adapter	Dimensions	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)	
	Weight	0.82 lb (370 g)	
	Input	Input	100 to 240 VAC
		Input Efficiency	83% min at 115 VAC
		Input frequency range	47 to 63 Hz
	Output	Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version 2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
		Output power	90W
		DC output	19.0V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class 1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF– over 200,000 hours at 25°C ambient condition.	

Technical Specifications

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	Weight	0.62 lb (280 g)	
	Input	Input	100 to 240 VAC
		Input Efficiency	83% min at 115 VAC
	Output	Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
		Output power	65W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	5 A, Over voltage protection- 29V max automatic shutdown
		Connector	3 pin/grounded, mates with interchangeable cords
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
Humidity		20% to 80%	
Storage Humidity		10% to 90%	
EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class 1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF – over 200,000 hours at 25°C ambient condition.		

8-Cell (73 WHr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 1.9 x 10.6 in (2.0 x 4.8 x 27.0 cm)	
	Weight	0.980 lb (0.445 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Watt-hour Capacity	73 WHr
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 1.5 hours when system is OFF

Technical Specifications

4-Cell (37 WHr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)	
	Weight	0.55 lb (0.249 kg)	
	Cells/Type	4-cell Lithium-Ion	
	Energy	Watt-hour Capacity	37 WHr
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF

Display

13.3-inch LED HD (1366 x 768) anti-glare	Dimensions (W x H)	11.53 x 6.49 in (29.3 x 16.5 cm)	
	Diagonal Size	13.3 in (33.8 cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.215 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	118 ppi	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum)	
		30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

Technical Specifications

13.3-inch LED HD (1366 x 768) BrightView	Dimensions (W x H)	11.53 x 6.49 in (29.3 x 16.5 cm)
	Diagonal Size	13.3 in (33.8 cm)
	Surface Treatment	BrightView (glossy)
	Contrast Ratio	300:1 (typical)
	Refresh Rate	60 Hz
	Brightness	200 nit (typical)
	Pixel Resolution	Pitch 0.215 mm
		Format 1366 x 768
		Configuration RGB Stripe
	Backlight	LED
	PPI	118 ppi
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)

13.3-inch LED 720P (1280 x 720) BrightView	Dimensions (W x H)	11.53 x 6.49 in (29.3 x 16.5 cm)
	Diagonal Size	13.3 in (33.8 cm)
	Surface Treatment	BrightView (glossy)
	Contrast Ratio	300:1 (typical)
	Refresh Rate	60 Hz
	Brightness	200 nit (typical)
	Pixel Resolution	Pitch 0.228 mm
		Format 1280 x 720
		Configuration RGB Stripe
	Backlight	LED
	PPI	111 ppi
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)

Internal Storage

Technical Specifications

500 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115 g)
	Capacity	500 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 1.5 ms
	(typical reads, including settling)	Average 11 ms
		Maximum 22 ms
	Rotational Speed	7200 rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

320 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115 g)
	Capacity	320 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 1.5 ms
	(typical reads, including settling)	Average 11 ms
		Maximum 22 ms
	Rotational Speed	7200 rpm
	Logical Blocks	625,142,448
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

Technical Specifications

250 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)
	Capacity	250 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 1.5 ms
	(typical reads, including settling)	Average 11 ms
		Maximum 22 ms
	Rotational Speed	7200 rpm
	Logical Blocks	488,397,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

160 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lb (115 g)
	Capacity	160 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 1.5 ms
	(typical reads, including settling)	Average 11 ms
		Maximum 22 ms
	Rotational Speed	7200 rpm
	Logical Blocks	312,581,808
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

Technical Specifications

500 GB 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)
	Capacity	500 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 3 ms
	(typical reads, including settling)	Average 13 ms
		Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	976,773,168
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

320 GB 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)
	Capacity	320 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 3 ms
	(typical reads, including settling)	Average 13 ms
		Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	625,142,448
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]
	Features	ATA Security

Technical Specifications

DVD-ROM Drive	Access Times	Random	< 110 ms CD (typical) < 110 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X-DVD	Up to 3,600 KB/s Up to 10,800 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5 GB	
	Transport	Tray Loading	

DVD+/-RW SuperMulti Drive LightScribe Drive	Access Times	Random	< 150ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM	Up to 3,600 KB/s Up to 10,800 KB/s Up to 3,600 KB/s Up to 2,400 KB/s Up to 10,800 KB/s Up to 10,800 KB/s Up to 10,800 KB/s Up to 8100KB/s Up to 5,400 KB/s Up to 5,400 KB/s Up to 6,750 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Technical Specifications

Blu-ray ROM DVD+/-RW Access Times	Random	<190 ms CD-ROM (typical)
SuperMulti DL LightScribe Drive		<190 ms DVD-ROM (typical)
		<230 ms BD-ROM (typical)
Max Data Transfer Rate	24X CD-ROM	Up to 3600KB/s
	8X DVD-ROM	Up to 10800 KB/s
	16X CD-R	Up to 1,200KB/s
	10X CD-RW	Up to 1500 KB/s
	8X DVD+R	Up to 10800 KB/s
	8X DVD+RW	Up to 10,800KB/s
	8X DVD-R	Up to 10800 KB/s
	6X DVD-RW	Up to 8,100 KB/s
	4X - DVD+R Dual Layer	
	4X - DVD-R Dual Layer	Up to 5400 KB/s
	5X DVD-RAM	Up to 6750 KB/s
	4X BD-ROM	Up to 18,000KB/s
Transfer Mode	UDMA Mode 5	
Interface	Gen 1 SATA	
Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW. DVD-RAM, BD-ROM, BD-R, BD-RE	
Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+R(9), DVD+RW, DVD-R, DVD-R(9), DVD-RW, DVD-RAM, LightScribe	
Max Media Capacity (read)	50.0 GB	
Max Media Capacity (write)	8.5 GB	
Transport	Tray Loading	

Audio

Hardware	Implementation	ADI 1984AJCPZ High Definition CODEC
	Touch-Sensitive Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Dual-Microphone Array	Yes

Technical Specifications

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	1.5 Watts
	Impedance	4 Ohms

Communications

V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
	Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter

Technical Specifications

	Command Set	V.21 Channel 2 V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251
Integrated Marvell 10/100/1000 NIC	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Power Management	ACPI compliant – multiple power modes Situation-sensitive features reduce power consumption
	Performance Features	TCP/IP/UDP Checksum Offload (configurable)
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite
	Interface	PCI Express x1
	NIC Device Driver Name	Marvell Yukon 88E8072 PCI-E Gigabit Ethernet Controller
HP un2420 EV-DO/HSPA Mobile Broadband Module	Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Maximum Data Rates	UMTS (HSPA) - 7.2 Mbps (Download), 2.0Mbps (Upload) CDMA (EVDO Release A) - 3.1 Mbps (Download), 1.8Mbps (Upload)
	GPS	Standalone GPS enabled

Technical Specifications

GPS Bands	L1 - 1575.42 MHz
Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
Maximum Power Consumption	2500mA (peak); 1000mA (average)
Power Consumption, Sleep Mode	5 mA
Power Management	USB selective suspend Integrated notebook wireless button
Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express MiniCard, USB 2.0 interface
Weight	11.5 g
Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
Voltage, Operating	3.3v +/- 10%
Temperature, Operating (from TIA/EIA/IS-98-D)	22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
Configuration Utilities	HP Connection Manager
LED Activity	LED Off - Radio Off; Solid LED On - Radio On

HP un2400 EV-DO/HSPA Mobile Broadband Module

Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9. UMTS/WCDMA: Release 99 and Release 5 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
Maximum Data Rates	UMTS (HSPA) – 7.2 Mbps (Download), 2.0 Mbps (Upload) CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8 Mbps (Upload)
Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
Maximum Power Consumption	2500mA (peak); 1000mA (average)

Technical Specifications

Power Consumption, Sleep Mode	5 mA
Power Management	USB selective suspend Integrated notebook wireless button
Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express MiniCard
Weight	11.5 g
Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 4.5 mm)
Voltage, Operating	3.3v +/- 10%
Temperature, Operating (from TIA/EIA/IS-98-D)	22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
Configuration Utilities	HP Connection Manager
LED Activity	LED Off – Radio Off; Solid LED On – Radio On

Intel WiFi Link 5100	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n* * In countries where 802.11n is not allowed, this capability is not enabled.
	Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.

Technical Specifications

Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture	Ad-hoc (Peer to Peer)	
Models	Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK) ²	15 dBm	
Output Power (for OFDM)	15 dBm	
	power varies by data rate) ²	
Power Consumption	Transmit: 2.3 Watts (average, with one spatial streams) Receive: 1.9 Watts (average with two receive chains) Idle mode ³ : 30 mW (average) Radio off: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ⁴	300 Mbps: -68 dBm, 54 Mbps: -74 dBm, 6 Mbps: -90 dBm	
Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none"> • Microsoft Windows Vista Wireless Network Connection Manager. • Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions. 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode and on battery power. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN 	

Technical Specifications

supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Intel WiFi Link 1000	Wireless LAN Standards	<p>IEEE 802.11b IEEE 802.11g IEEE 802.11n (draft 2.0)*</p> <p>* The specifications for 802.11n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled.</p>
	Interoperability	<p>Wi-Fi certified</p> <p>Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)</p>
	Frequency Band	2.4 GHz
	Antenna Structure	1 transmit; 2 receive (1x2)
	Data Rates	<p>802.11b: 1, 2, 5.5, 11 Mbps</p> <p>802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps</p> <p>802.11n (draft): many possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n (draft) specification</p>
	Modulation	<p>Direct Sequence Spread Spectrum</p> <p>DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM</p>
	Security ¹	<p>Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST)</p> <p>Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2</p> <p>Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP</p> <p>Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.</p>
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture	Ad-hoc (Peer to Peer)
	Models	Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
	Output Power (for CCK and OFDM) ²	15 dBm typical
	Power Consumption	<p>Transmit: 1.4 Watts (average, with one spatial streams)</p> <p>Receive: 1.3 Watts (average with two receive chains)</p> <p>Idle mode³: 30 mW (average)</p> <p>Radio off: 20 mW (max)</p>
	Power Management	<p>ACPI compliant power management</p> <p>802.11 compliant power saving mode</p>
	Receiver Sensitivity ⁴	54 Mbps: -74 dBm, 6 Mbps: -91 dBm

Technical Specifications

Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.0075 lb (3.4 g)	
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)	
Operating Voltage	3.3V +/- 9%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Microsoft Windows XP	
	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support) 	
	Microsoft Windows Vista	
	<ul style="list-style-type: none"> • Microsoft Windows Vista Wireless Network Connection Manager. • Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions. 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode and on battery power. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista. 	

Broadcom 4322AGN 802.11a/b/g/n WiFi Adapter	Wireless LAN Standards	IEEE 802.11a
		IEEE 802.11b
		IEEE 802.11g
		IEEE 802.11n
Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)	
Frequency Band	2.4 GHz and 5 GHz	
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps	

Technical Specifications

Frequency Support	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK) ²	17 dBm
Output Power (for OFDM) ²	5 dBm
	power varies by data rate) ²
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ³	270 Mbps: -61dBm, , 54 Mbps: -72 dBm, 11 Mbps: -85 dBm , 1 Mbps: -92 dBm
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express Half-MiniCard
Weight	0.013 lb (6 g)
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Operating Voltage	3.3v +/- 10%
Temperature	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
Configuration Utility ⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)

Technical Specifications

Microsoft Windows Vista

- Microsoft Windows Vista Wireless Network Connection Manager
- Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.

LED Activity

LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Broadcom 4312G 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security ¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture	Ad-hoc (Peer to Peer)
	Models	Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CCK) ²	17 dBm , nominal
	Output Power (for OFDM) ²	5 dBm , nominal power varies by data rate ²
	Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode

Technical Specifications

Receiver Sensitivity ³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none"> • Microsoft Windows Vista Wireless Network Connection Manager • Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions. 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software suppliers. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista. 	

HP Integrated Module with Bluetooth 2.1 Wireless Technology	Bluetooth Specification 2.1 Compliant
	Dimensions 1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
	Frequency Band 2402 to 2480 MHz
	Number of Available Channels 79 (1 MHz) available channels
	Data Rates and Throughput 3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power -6 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity Better than -80 dBm at 0.1 % raw bit error rate

Technical Specifications

Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
Bluetooth Software Supported	Broadcom Bluetooth for Microsoft Windows Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% Non-operating 5% to 95%
Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

¹ indicates the profile is supported by Microsoft Windows XP SP2

² indicates the profile is part of Windows Vista

Technical Specifications

Environmental Data **Eco-Label Certifications** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Gold*

* EPEAT registration varies by country. See www.epeat.net for registration status by country. EPEAT status listed above applies to U.S.

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	8.525W	9.076W	8.502W
Sleep (Energy Star low power mode)	1.065W	1.165W	1.042W
Off	0.781W	0.882W	0.766W

Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	29 BTU/hr	31 BTU/hr	29 BTU/hr
Sleep	4 BTU/hr	4 BTU/hr	4 BTU/hr
Off	3 BTU/hr	3 BTU/hr	3 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions
(in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	2.9	27.5
Fixed Disk (random writes)	3.3	29.1

System fan is usually off except when charging the battery

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:
Mercury greater the 5ppm by weight
Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:
Lithium

Additional information This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and

Technical Specifications

Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level in the U.S.

NOTE: EPEAT registration varies by country. See www.epeat.net for registration status by country.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 95.9% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated Carton 635 g
 - Corrugated 140 g
- Internal:
 - Polyethylene low density 15 g
 - EPE - Expanded Polyethylene 50 g
- The Corrugated Carton packaging material is made from 80% recycled content.
- The Corrugated packaging materials contains at least 80% recycled content.
- The Polyethylene low density foam packaging materials contains at least 100% recycled content.
- The EPE - Expanded Polyethylene packaging materials contains at least 40% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Material Usage

This product does not contain any of the following substances in excess of

Technical Specifications

regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

(http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management and Recycling Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to:

<http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

**Hewlett-Packard
Corporate Environment
Information**

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Technical Specifications

Copyright © 2009 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, and Windows Vista are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core 2 Duo, Pentium and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.