



## Overview

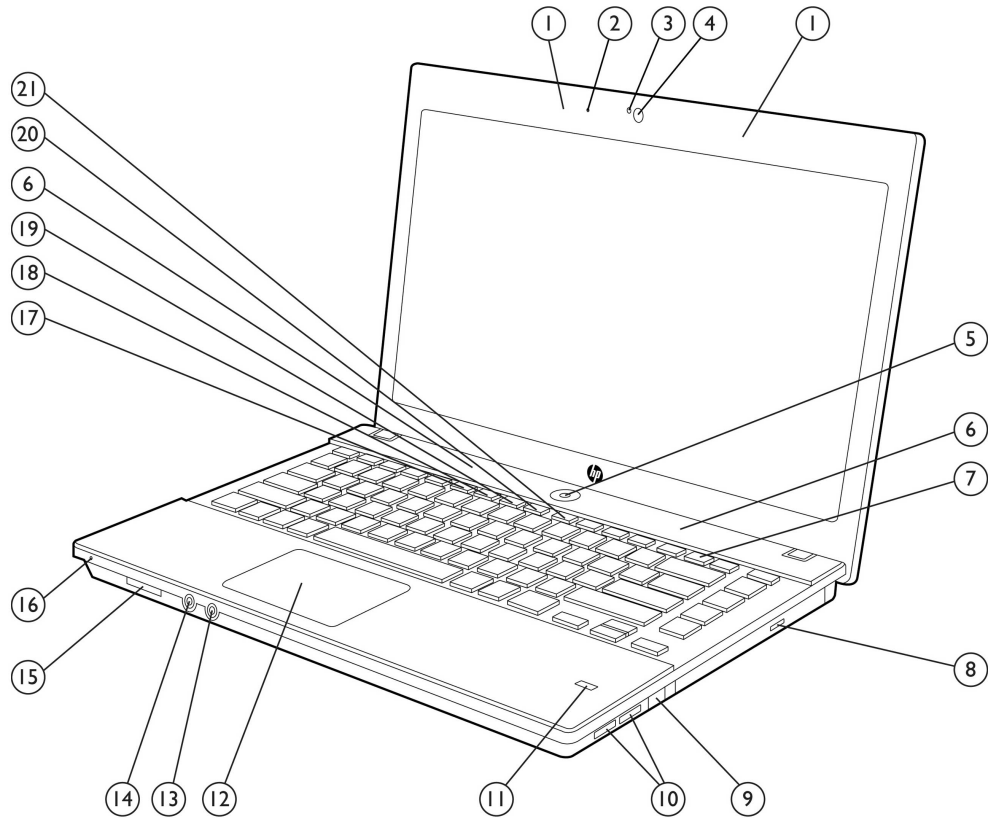

- |  |   |
|--|---|
| 1. WLAN antennas                           | 12. ClickPad with left and right ClickPad buttons |
| 2. Integrated microphone                   | 13. Stereo microphone in                          |
| 3. Webcam LED (works with optional webcam) | 14. Stereo headphone/line out                     |
| 4. Optional 2 MP webcam                    | 15. Media Card Reader                             |
| 5. Power button with LED indicator         | 16. Hard drive activity LED indicator             |
| 6. Stereo speakers                         | 17. HP QuickLook 3 button with LED indicator      |
| 7. Wireless switch with LED indicator      | 18. HP QuickWeb button with LED indicator         |
| 8. Optical drive (select models)           | 19. Volume mute button                            |
| 9. Optional RJ-11/modem port               | 20. Volume down button                            |
| 10. (2) USB 2.0 ports                      | 21. Volume up button                              |
| 11. Optional HP Fingerprint Sensor         |   |

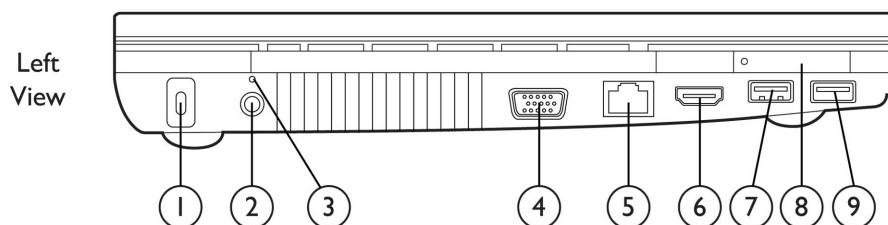


- |                         |                         |
|-------------------------|-------------------------|
| 1. Kensington Lock slot | 6. HDMI port            |
| 2. Power connector      | 7. Combo eSATA/USB port |



## Overview

- |   |                        |
|---|------------------------|
| 3. Battery charging LED indicator             | 8. ExpressCard/34 slot |
| 4. VGA connector (external monitor/projector) | 9. USB 2.0 port        |
| 5. RJ-45/Ethernet port                        |                        |

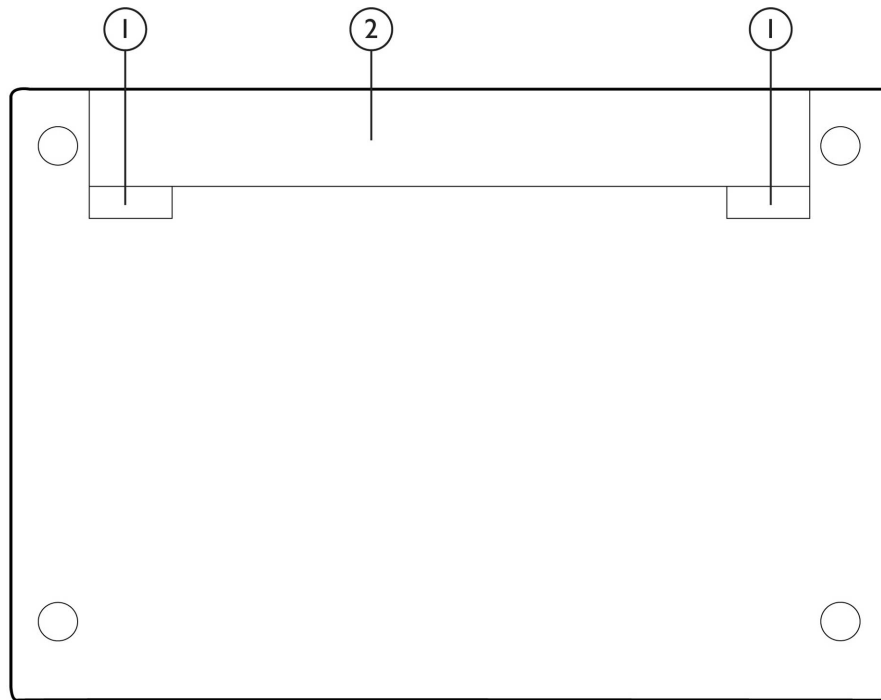


BottomView

- |                            |                |
|----------------------------|----------------|
| 1. Battery release latches | 2. Battery bay |
|----------------------------|----------------|

---

## HP ProBook 4525s Notebook PC


## Overview

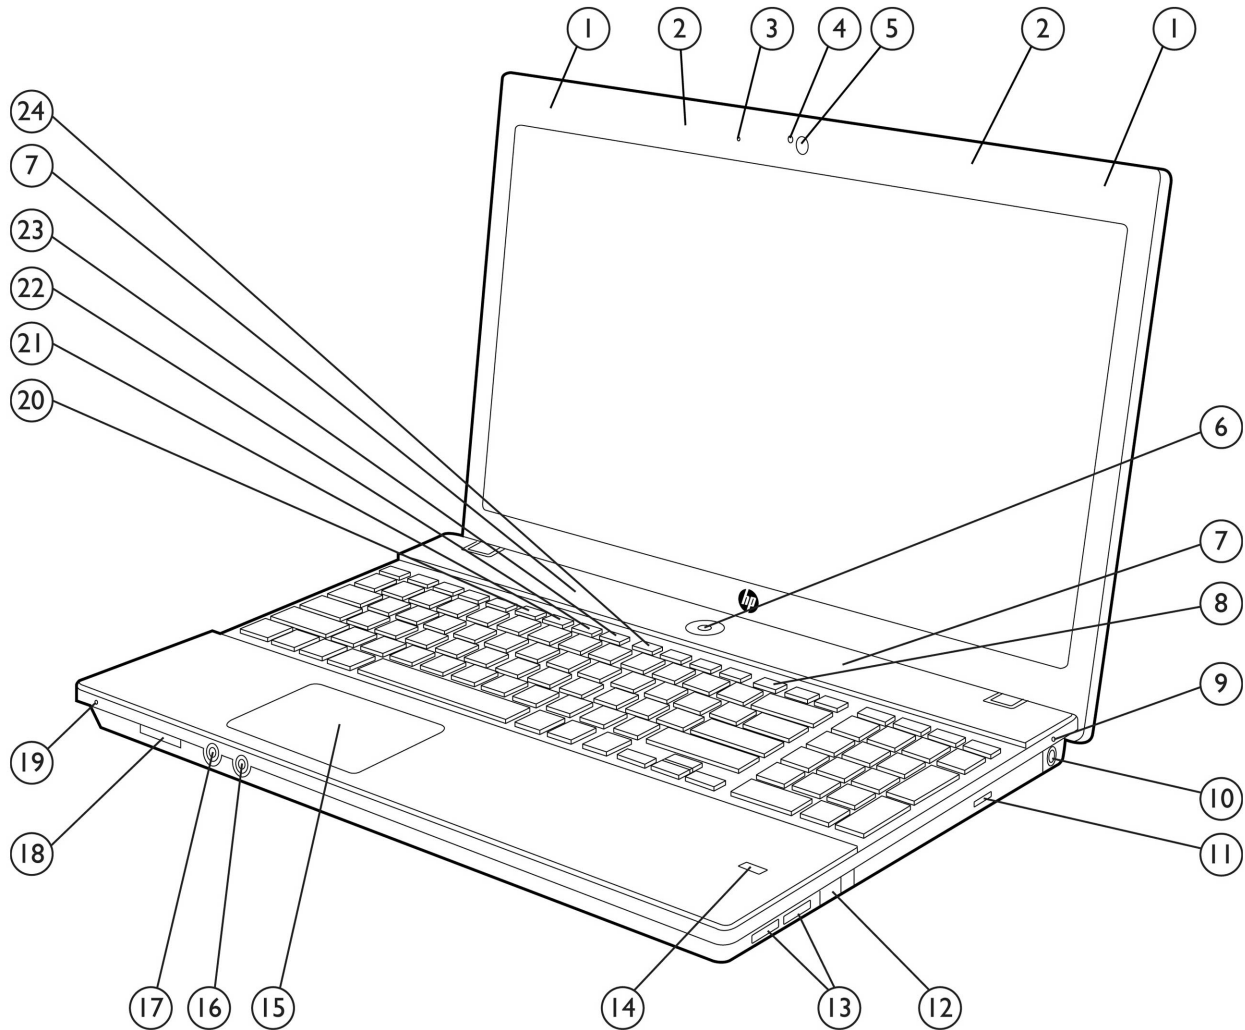


- |  |   |
|--|---|
| 1. WWAN antennas (select models)           | 13. (2) USB 2.0 ports                             |
| 2. WLAN antennas                           | 14. Optional HP Fingerprint Sensor                |
| 3. Integrated microphone                   | 15. ClickPad with left and right ClickPad buttons |
| 4. Webcam LED (works with optional webcam) | 16. Stereo microphone in                          |
| 5. Optional 2 MP webcam                    | 17. Stereo headphone/line out                     |
| 6. Power button with LED indicator         | 18. Media Card Reader                             |
| 7. Stereo speakers                         | 19. Hard drive activity LED indicator             |
| 8. Wireless switch with LED indicator      | 20. HP QuickLook 3 button with LED indicator      |
| 9. Battery charging LED indicator          | 21. HP QuickWeb button with LED indicator         |
| 10. Power connector                        | 22. Volume mute button                            |
| 11. Optical drive (select models)          | 23. Volume down button                            |
| 12. Optional RJ-11/modem port              | 24. Volume up button                              |



## Overview

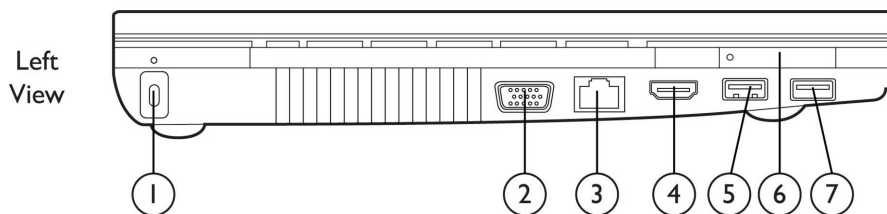

- |   |                         |
|---|-------------------------|
| 1. Kensington Lock slot                       | 5. Combo eSATA/USB port |
| 2. VGA connector (external monitor/projector) | 6. ExpressCard/34 slot  |
| 3. RJ-45/Ethernet port                        | 7. USB 2.0 port         |
| 4. HDMI port                                  |                         |

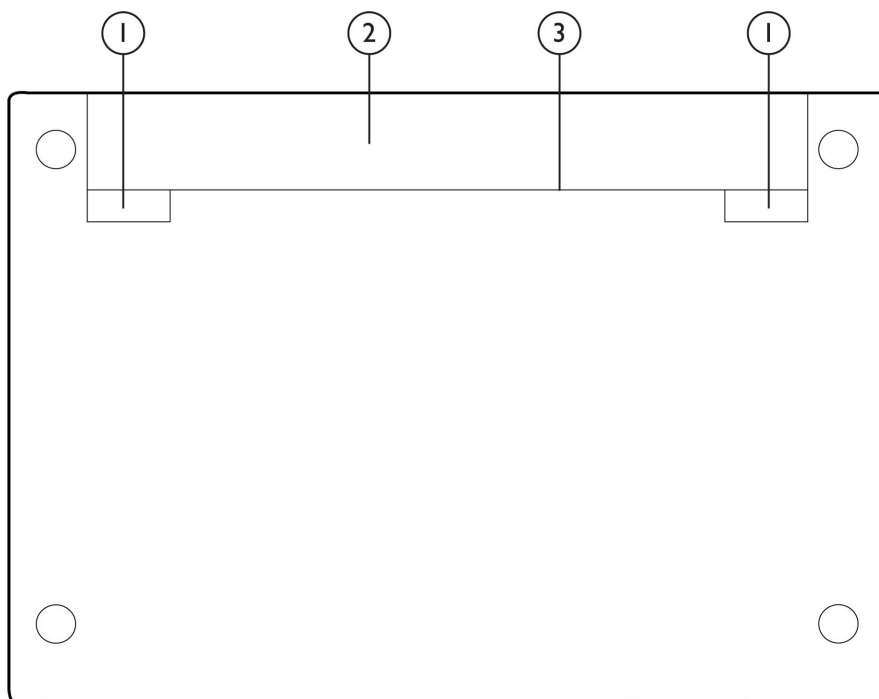

BottomView

- |                            |   |
|----------------------------|---|
| 1. Battery release latches | 3. SIM card slot (select units, located inside battery bay) |
| 2. Battery bay             |   |

## Overview

### At A Glance

- Genuine Windows 7 versions, Genuine Windows Vista versions, SUSE Linux
- Thin, lightweight design with brushed aluminum finish for durability and style
- Color choice of caviar or bordeaux
- Full-sized spill-resistant keyboard with full separate numeric keypad on the HP ProBook 4525s
- VISION Pro Technology from AMD
- AMD Phenom™ II Quad-Core or Triple-Core Mobile Processor, AMD Turion™ II Dual-Core Mobile Processor, AMD Athlon™ II Dual-Core Processor for Notebook PCs, or AMD V-Series Single-Core Processor for Notebook PCs
- Integrated ATI Mobility Radeon HD 4250 graphics; or HP ProBook 4525s also offers ATI Mobility Radeon HD 530v discrete graphics or HD 5470 discrete graphics
- Optional HP Fingerprint Sensor for single sign-on
- HP Face Recognition for HP ProtectTools for easy logins using the optional integrated 2 MP webcam
- Choice of 9-cell or 6-cell battery to customize weight and run-time to your needs
- Corel Home Office productivity suite for word processing, spreadsheets, and presentations (trial version)
- ArcSoft TotalMedia Suite for playing, creating, and editing video and audio files
- New keyboard function keys for play, rewind, and fast-forward of video and audio files
- HP DayStarter (calendar display while Windows starts), HP QuickLook 3 (quick access to e-mail, calendar, contacts and tasks), HP QuickWeb
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, report workforce power consumption
- HP Connection Manager 3.1
- Flexible wireless connectivity options:
  - Integrated HP un2420 EV-DO/HSDPA Mobile Broadband Module\* provides worldwide Gobi mobile Internet technology with GPS
  - Integrated Broadcom 802.11 b/g/n or b/g wireless LAN module
  - Bluetooth® v2.1
- Widescreen LED-backlit HD display with 16:9 aspect ratio, BrightView optional
  - HP ProBook 4425s: 14.0-inch diagonal
  - HP ProBook 4525s: 15.6-inch diagonal
- Enhanced security features including HP ProtectTools with Central Management, optional HP Fingerprint Sensor, HP Face Recognition, Computrace LoJack Pro ready, HP SpareKey, HP Disk Sanitizer, optional HP Privacy Filter
- HDMI port for connecting to high-resolution displays; combo eSATA/USB port

\* Only available in HP ProBook 4525s with integrated graphics.



## Standard Features (availability may vary by country)

### Processors

AMD Phenom II Quad-Core Mobile Processor P920 (1.6 GHz, 2MB L2 cache)  
AMD Phenom II Triple-Core Mobile Processor P820 (1.8 GHz, 1.5 MB L2 cache)  
AMD Turion II Dual-Core Mobile Processor P520 (2.3 GHz, 2MB L2 cache)  
AMD Athlon II Dual-Core Processor P320 (2.1 GHz, 1MB L2 cache)  
AMD V Series Processor V120 (2.2 GHz, 512 KB L2 cache)

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

\* Intel's numbering is not a measurement of higher performance.

### Operating System

#### Preinstalled

Genuine Windows 7 Professional Edition 32\*  
Genuine Windows 7 Professional Edition 64\*  
Genuine Windows 7 Home Premium Edition 32\*  
Genuine Windows 7 Home Premium Edition 64\*  
Genuine Windows 7 Home Basic Edition 32\*  
Genuine Windows 7 Starter 32\*  
Genuine Windows Vista Business 32\*\*  
Genuine Windows Vista Home Basic 32\*\*  
SUSE Linux Enterprise Desktop 11  
Red Flag Linux (PRC only)  
FreeDOS

#### Certified

SUSE Linux Enterprise Desktop 11

\* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality.

See: <http://www.microsoft.com/windows/windows-7/> for details.

\*\* Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

### Chipset

AMD M880G chipset

### Graphics

#### Integrated graphics:

ATI Mobility Radeon HD 4250 graphics controller with shared video memory  
Microsoft DirectX 10.1 capable

#### Discrete graphics (available in HP ProBook 4525s only):

ATI Mobility Radeon HD 530v graphics controller with 512 MB dedicated video memory  
Microsoft DirectX 10.1 capable  
ATI Mobility Radeon HD 5470 graphics controller with 512 MB dedicated video memory  
Microsoft DirectX 11 capable



## Standard Features (availability may vary by country)

Display	Internal	HP ProBook 4425s: 14.0-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution) 14.0-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)  HP ProBook 4525s: 15.6-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution) 15.6-inch diagonal LED-backlit HD BrightView (1366 x 768 resolution)
	External	Optional HP Privacy Filter Up to 32-bit per pixel color depth VGA port supports resolutions up to 2560 x 1440 at 75 Hz HDMI port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included). <b>NOTE:</b> Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Memory	Standard	DDR3 PC3-8500 SDRAM (1066 MHz)* Two SODIMM slots supporting dual-channel memory 1024 MB, 2048 MB, and 4096 SODIMMs
	Maximum Dual-channel	Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2 Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

\* Memory speed is processor dependent.  
**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Communications	Realtek Ethernet (10/100/1000 NIC)* Optional 56K V.92 modem**
	* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required. ** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.



## Standard Features (availability may vary by country)

### Wireless Devices

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Mobile Broadband (WWAN) requires a Windows operating system and is available in select countries as a factory configurable feature for the HP ProBook 4525s only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

**HP un2420  
EV-DO/HSPA Mobile  
Broadband Module**  
(only available in HP  
ProBook 4525s with  
integrated graphics)

Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications.

**NOTE:** Separately purchased mobile network operator service is required.

Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.

**All 802.11 integrated  
wireless LAN options**

Wi-Fi certified\*

Wired Equivalent Privacy (WEP) support up to 128-bit keys

Wi-Fi Protected Access (WPA) and WPA2 support

802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP

Advanced Encryption Standard (AES) support

Dual antennas integrated in the display enclosure

**Broadcom 4313GN  
802.11 b/g/n  
WiFi Adapter**

Integrated support for 802.11 b, g, and n

Cisco Compatible Extensions support

Up to 300 mbps data rate

**Broadcom 4312G  
802.11 b/g  
WiFi Adapter**

Integrated support for 802.11 b and g

Cisco Compatible Extensions support

Up to 54 mbps data rate

**HP Integrated Module  
with Bluetooth Wireless  
Technology**

Bluetooth Specification v2.1 compliant

Works with a wide range of Bluetooth devices

### Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, full separate numeric keypad, and 12 function keys. US and International key layouts are available. Other features include hotkeys for instant access to power conservation and brightness, and 19.05 x 19.05 mm key pitch (center-to-center spacing).

### Pointing device

ClickPad with gestures support:

Two-finger scroll, zoom, pinch and pivot rotate, and three finger flick

**NOTE:** Gestures not available for Linux and FreeDOS.





## Standard Features (availability may vary by country)

Expansion card slots	ExpressCard/34 slot	Supports ExpressCard/34 (34 mm x 75 mm x 5 mm) card sizes
	Media Card Reader	Supports SD (Secure Digital), MMC (MultiMedia Card), Memory Stick, Memory Stick Pro, Memory Stick Duo*, xD-Picture card
* Memory Stick Duo Adapters are required and sold separately. Inserting a Memory Stick Duo Card directly into your notebook could damage the memory card and/or notebook.		
Storage	Internal Storage Device	250/320/500 GB 7200 rpm SMART SATA II Hard Drive 640 GB 5400 rpm SMART SATA II Hard Drive
	HP 3D DriveGuard (Windows models only)	The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.
	Fixed optical drives	Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive* DVD+/-RW SuperMulti DL LightScribe Drive DVD-ROM Drive
* Support for the Blu-ray DVD drive on configurations with integrated graphics requires Windows7 or Windows Vista; configurations with discrete graphics support it with any offered Windows operating system.		
Interfaces	VGA	One
	HDMI	One
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem (optional)	One
	RJ-45/Ethernet	One
	Combo eSATA/USB 2.0	One
	USB 2.0	Three
	LED status indicators	Eight



## Standard Features (availability may vary by country)

### Audio/Visual

High Definition Audio support  
Integrated stereo speakers  
Integrated digital microphone  
Stereo headphone/line out  
Stereo microphone in

Optional 2 MP webcam

- Supports videoconferencing and still image capture
- Improved quality for video streaming and still image capture (1600x1200 resolution)
- Up to 30 frames/sec
- Fixed focus lens
- 16-bit true color (camera sensor up to UXGA resolution)

### Software

#### Preinstalled software with Windows operating system

HP Recovery Manager (available with Windows 7 or Vista only)  
HP Support Assistant (available with Windows 7 or Vista only)  
HP ProtectTools Security Manager  
HP Face Recognition  
HP QuickLaunch Buttons Software  
HP QuickLook 3  
HP QuickWeb  
HP Power Assistant  
HP Connection Manager 3.1  
HP Wireless Assistant  
HP Day Starter  
Corel Home Office productivity suite 60-day trial  
Roxio Creator Business (select models)  
ArcSoft Total Media Suite  
Microsoft Office 2010 preloaded (purchase of a Product Key required to activate a full Office 2010 suite)\*  
McAfee Total Protection\*\*  
Norton Online Backup trial  
HP Webcam Software (select models)  
Skype  
WinZip 12 trial

#### Additional software available from the web

HP SoftPaq Download Manager

\* Microsoft Office 2010 Preloaded includes reduced functionality versions of Word and Excel. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and <http://www.office.com>.

\*\* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

### HP Recovery Manager

Models shipped with Windows 7 or Windows Vista include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 15 GB of the hard drive is reserved for the system recovery software.



## Standard Features (availability may vary by country)

### Security

#### Standard Features

HP ProtectTools Security Manager  
Face Recognition for HP ProtectTools  
One Step Login  
Enhanced Pre-Boot Security  
HP SpareKey  
HP Disk Sanitizer  
Setup Password  
Kensington Lock Slot  
Support for Computrace\* LoJack Pro for HP ProtectTools

#### Optional Features

HP Fingerprint Sensor  
HP Privacy Filter

\* The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

### HP ProtectTools Security Manager with Central Management

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:

- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Computrace LoJack Pro for HP ProtectTools

HP ProtectTools is now capable of being centrally managed from a single control point. HP ProtectTools is management ready out of the box, in partnership with Digital Persona, and provides features that customers expect from a centrally managed security solution, such as user provisioning, credential reset, and system and network revocation. Central Management is available in two feature levels:

- Digital Persona Pro Enterprise: Designed for environments with Active Directory. For large businesses, as well as smaller businesses utilizing an active directory based infrastructure. Gives IT Managers the ability to create role based security policies, provision users, and create login policies based on passwords, biometrics or smart cards. Management features also include remote credential recovery in case the user forgets the password, loses the smart card, or cannot use the fingerprint reader for any reason. In addition, advanced auditing capabilities are also built in.
- Digital Persona Workgroup Manager: Designed for environments without Active Directory. This option can be used by smaller businesses as well as workgroups within large organizations. Workgroup Manager offers features similar to Digital Persona Pro Enterprise, but without active directory integration. Workgroup activation is built into HP ProtectTools, and activation of up to 5 seats is completely free.



## Standard Features (availability may vary by country)

### Power Supply

Models with integrated graphics: External 65-watt Smart AC adapter  
Models with discrete graphics: External 90-watt Smart AC adapter  
6-foot (1.8-meter) power cord included; total length including external AC adapter is 12 feet (3.66 meter)

HP Fast Charge\*

\* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to the HP 9-cell battery.

### Battery

#### Primary battery

HP 9-cell (93 WHr) Li-Ion battery  
HP 6-cell (47 WHr) Li-Ion battery

### Battery Life

	Configurations with integrated graphics	Configurations with discrete graphics
HP ProBook 4425s		
9-cell battery	TBD	TBD
6-cell battery	TBD	TBD
HP ProBook 4525s		
9-cell battery	Up to 8 hours	Up to 4 hours
6-cell battery	Up to 6 hours and 45 minutes	Up to 3 hours and 30 minutes

**NOTE:** Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark [www.bapco.com/products/mobilemark2007](http://www.bapco.com/products/mobilemark2007) for additional details.

### System Standby Time

Up to TBD week

### Power Conservation

Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)  
ATI PowerPlay technology  
Hibernation  
Standby  
ACPI compliance

### Service and Support

HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country; 1-year limited warranty on primary battery. Warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.



Options (availability may vary by country)

Memory	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA
Storage	HP 250 GB USB Pocket Media Hard Drive	FE477AA
	HP External USB CD/DVD R/RW Drive	FS943AA
Communication	HP WLAN 802/11 a/b/g/n Mini-card Kit (HP ProBook 4525s only)	KM591AA#xxx
Expansion	HP Basic Adjustable Stand	AL549AA
	HP USB 2.0 Docking Station	FQ834AA
	HP Essential USB 2.0 Port Replicator	AQ731AA
	HP Dual Hinge Notebook Stand	AW661AA
	HP Display & Notebook Stand	AW662AA
	HP Adjustable Display Stand	AW663AA
	HP Adjustable Dual Display Stand	AW664AA
Power	65W Smart AC Adapter	ED494AA
	90W Smart AC/Auto/Air Combo Adapter	AJ652AA
	HP 65W Slim Adapter	AX727AA
	HP Smart 65W Travel AC Adapter	AU155AA
	90W Smart AC Adapter	ED495AA
	HP 6-Cell Li-Ion Primary Battery	BQ350AA
Carrying Cases	HP Deluxe Nylon Backpack	RR317AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Roller Case	GD405AA
	HP Basic Backpack	AM863AA
	HP Basic Messenger	AP355AA
	HP Basic Carrying Case	AJ078AA
	HP Professional Series Carrying Case	AT886AA
	HP Professional Series Backpack	AT887AA
	HP Professional Series Messenger	AT888AA
	HP Professional Series Designer Tote	AT889AA
	HP Professional Series Slip Case	AT890AA
	HP Elite Series Designer Tote	AT891AA



Options (availability may vary by country)

	HP Elite Series Quick Case	AT892AA
Security	HP/Kensington MicroSaver Security Lock	PC766A
	HP Notebook Cable Lock	AY475AA
	HP Privacy Filter For 15.6 in	AU103AA
Input/Output Devices	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Keyboard & Mouse Bundle	RC465AA
	HP USB Optical Travel Mouse	RH304AA
	HP Wireless Mouse	AR085AA
	HP BT Headset	AR084AA
	HP Mobile Audio Speakers	FS944AA
	HP Mobile Productivity Bundle	AQ729AA
	HP Notebook Companion Projector	AX325AA
	HP Special Edition Optical Mouse	AU094AA
	HP Premium Autofocus Webcam	KQ245AA
	Premium Digital Headset	KJ270AA
	HP Promo USB Graphics Adapter	NL571AT
Miscellaneous	HP Notebook Projection Companion	AX325AA
	HP 2 Megapixel Auto Focus Webcam	KQ245AA
	HP Digital Premium Stereo Headset	KJ270AA



## Memory

DDR3 PC3-10600 SDRAM (1333 MHz)\*

Two SODIMM slots supporting dual-channel memory

SODIMM sizes supported: 1024 MB, 2048 MB and 4096 MB

### Standard Memory

- 1024 MB (1024 MB x 1)
- 2048 MB (2048 MB x 1)
- 2048 MB (1024 MB x 2)
- 3072 MB (2048 MB + 1024 MB)
- 4096 MB (2048 MB x 2)
- 4096 MB (4096 MB x 1)

### Optional Memory Upgrades

Support for up to 8192 MB of memory with the installation of optional DDR3 SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
2048 MB	1024 MB	1024 MB
2048 MB	2048 MB	empty
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
4096 MB	4096 MB	empty
8192 MB	4096 MB	4096 MB

\* Memory speed is processor dependent.

**NOTE:** This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

### Memory Upgrades

HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA
HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA
HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA



## Storage

### Removable Media Drive Support

---

	Quantity Supported	Drive Bay
Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive*	One	Fixed optical drive bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Fixed optical drive bay
DVD-ROM Drive	One	Fixed optical drive bay

\* Support for the Blu-ray DVD drive on configurations with integrated graphics requires Windows7 or Windows Vista; configurations with discrete graphics support it with any offered Windows operating system.

---

### Internal Storage Device

---

	Quantity Supported	Drive Bay
<b>Hard Drives</b>		
500 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
320 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
640 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay





## Technical Specifications

System Unit	Dimensions (HxWxD)	HP ProBook 4425s: 1.07 in (at front) x 13.23 in x 9.15 in 27.0 mm (at front) x 336.0 mm x 232.4 mm
		HP ProBook 4525s: 1.09 in (at front) x 14.6 in x 9.83 in 27.7 mm (at front) x 371.8 mm x 249.6 mm
Weight		HP ProBook 4425s: Starting at 4.71 lb (2.14 kg) without optical drive or 5.0 lb (2.27 kg) with optical drive
		HP ProBook 4525s: Starting at 5.26 lb (2.39 kg) without optical drive or 5.55 lb (2.52 kg) with optical drive
<b>NOTE:</b> Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, no optical drive. Weight varies by configuration and components.		
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	with integrated graphics: 18.16 W with discrete graphics: 20.34 W
Temperature	Max Operating Power	< 90 W or < 65W
	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
Relative Humidity	Non-operating	-4° to 140° F (-20° to 60° C)
	Operating	10% to 90%, non-condensing
Shock	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
	Operating	125 G, 2 ms, half-sine
Random Vibration	Non-operating	200 G, 2 ms, half-sine
	Operating	0.75 grms
Altitude (unpressurized)	Non-operating	1.50 grms
	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
Industry Standard Certifications	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered TBD in United States**
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes



## Technical Specifications

MIC	Yes
BSMI	Yes
CE Marking Compliance	Yes
BNCI or BELUS	Yes
CIT	Yes
GOST	Yes
Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes
UKRSERTCOMPUTER	Yes

\* Configurations of the HP ProBook 4425s and HP Probook 4525s that are ENERGY STAR qualified are identified as HP ProBook 4425s ENERGY STAR and HP Probook 4525s ENERGY STAR on HP websites and on [www.energystar.gov](http://www.energystar.gov).

\*\* EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country. EPEAT status listed above applies to U.S.

**NOTE:** For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

### HP 90W Smart AC Adapter

<b>Dimensions</b>	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)
<b>Weight</b>	0.82 lb (370 g)
<b>Input</b>	100 to 240 VAC
	Input Efficiency 87% min at 115 VAC
	Input frequency range 47 to 63 Hz
	Input AC current 1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version
	2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
<b>Output</b>	Output power 90W
	DC output 19.0V
	Hold-up time 5 msec at 115 VAC input
	Output current limit <11A, Over voltage protection- 29V max automatic shutdown
<b>Connector</b>	3 pin/grounded, mates with interchangeable cords
<b>Environmental Design</b>	Operating temperature 32° to 104° F (0° to 40° C)
	Non-operating (storage) temperature -4° to 149° F (-20° to 65° C)
	Altitude 0 to 10,000 ft (0 to 3,048 m)
	Humidity 20% to 80%
	Storage Humidity 10% to 90%



## Technical Specifications

### EMI and Safety Certifications

CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF- over 200,000 hours at 25°C ambient condition.

### HP 65W Smart AC Adapter

#### Dimensions

4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)

#### Weight

0.62 lb (280 g)

#### Input

100 to 240 VAC

Input Efficiency

87% min at 115 VAC

Input frequency range

47 to 63 Hz

Input AC current

1.7 A at 90 VAC, 0.85 A at 180 VAC

#### Output

Output power

65W

DC output

18.5V

Hold-up time

5 msec at 115 VAC input

Output current limit

<11A, Over voltage protection- 29V max automatic shutdown

#### Connector

3 pin/grounded, mates with interchangeable cords

#### Environmental Design

Operating temperature

32° to 104° F (0° to 40° C)

Non-operating (storage) temperature

-4° to 149° F (-20° to 65° C)

Altitude

0 to 10,000 ft (0 to 3,048 m)

Humidity

20% to 80%

Storage Humidity

10% to 90%

### EMI and Safety Certifications

CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.

**NOTE:** Unless otherwise noted, temperature limits listed in the following component specifications relate to the internal temperatures of these components and not to the environment in which the PC is operating.



## Technical Specifications

9-Cell (93 WHr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 2.9 x 8.3 in (2.0 x 7.3 x 21.0 cm)	
	Weight	1.07 lb (0.488 kg)	
	Cells/Type	9-cell Lithium-Ion	
	Energy	Watt-hour Capacity	93 WHr
		Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	3 to 4 hours
		System ON	4 to 6 hours (depending on system power consumption)
6-Cell (47 WHr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)	
	Weight	0.659 lb (0.299 kg)	
	Cells/Type	6-cell Lithium-Ion	
	Energy	Watt-hour Capacity	47 WHr
		Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF

## Displays



## Technical Specifications

15.6-inch LED HD (1366 x 768) anti-glare	Dimensions (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)	
	Diagonal Size	15.6 in (39.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 (min)	
	Refresh Rate	60 Hz	
	Brightness	210 nit (typical)	
	Pixel Resolution	Pitch	0.252 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
PPI		101 ppi	
Viewing Angle		$\pm 30^\circ$ Horizontal, $\pm 10^\circ$ Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

15.6-inch LED HD (1366 x 768) BrightView	Dimensions (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)	
	Diagonal Size	15.6 in (39.6cm)	
	Surface Treatment	BrightView (glossy)	
	Contrast Ratio	500:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.252 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
PPI		101 ppi	
Viewing Angle		$\pm 30^\circ$ Horizontal, $\pm 10^\circ$ Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	



## Technical Specifications

14.0-inch LED HD (1366 x 768) anti-glare	Active Area (W x H)	12.74 x 7.56 in (32.4 x 19.2 cm)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.227 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	112 ppi	
	Viewing Angle	$\pm 30^\circ$ Horizontal, $\pm 10^\circ$ Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

14.0-inch LED HD (1366 x 768) BrightView	Active Area (W x H)	12.16 x 6.85 in (30.9 x 17.4 cm)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	BrightView (glossy)	
	Contrast Ratio	500:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	Pitch	0.227 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	112 ppi	
	Viewing Angle	$\pm 30^\circ$ Horizontal, $\pm 10^\circ$ Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

## Internal Storage



## Technical Specifications

500 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	500 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	<b>Synchronous</b> (maximum)	150 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	<b>Single Track</b>	1.5ms
		<b>Average</b>	11ms
		<b>Maximum</b>	22ms
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

320 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	250 GB	
	Height	0.37 in (9.5 mm) or on some models 0.28 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	<b>Synchronous</b> (maximum)	150 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	<b>Single Track</b>	1.5ms
		<b>Average</b>	11ms
		<b>Maximum</b>	22ms
	Rotational Speed	7200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	



## Technical Specifications

250 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	250 GB	
	Height	0.37 in (9.5 mm) or on some models 0.28 in (7 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	<b>Synchronous</b> (maximum)	150 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	<b>Single Track</b>	1.5ms
		<b>Average</b>	11ms
		<b>Maximum</b>	22ms
	Rotational Speed	7200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

## Optical Drives

DVD-ROM Drive	Access Times	Random	< 140 ms CD (typical)
			< 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM	Up to 3,600 KB/s
		8X-DVD	Up to 10,800 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5GB	
	Transport	Tray Loading	





## Technical Specifications

DVD+/-RW SuperMulti DL LightScribe Drive	Access Times	Random	< 150ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM	Up to 3,600 KB/s Up to 10,800 KB/s Up to 3,600 KB/s Up to 2,400 KB/s Up to 10,800 KB/s Up to 10,800 KB/s Up to 10,800 KB/s Up to 8100KB/s Up to 5,400 KB/s Up to 5,400 KB/s Up to 6,750 KB/s
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Blu-ray ROM DVD+/-RW SuperMulti DL LightScribe Drive	Access Times	Random	< 190 ms CD-ROM (typical) < 190ms DVD-ROM (typical) < 230 ms BD-ROM (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD-ROM 16X CD-R 10X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM	Up to 3600KB/s Up to 10800 KB/s Up to 1,200KB/s Up to 1500 KB/s Up to 10800 KB/s Up to 10,800KB/s Up to 10800 KB/s Up to 8,100 KB/s Up to 5400 KB/s Up to 6750 KB/s



## Technical Specifications

	4X BD-ROM	Up to 18,000KB/s
<b>Transfer Mode</b>	UDMA Mode 5	
<b>Interface</b>	Gen 1 SATA	
<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM, BD-ROM, BD-R, BD-RE	
<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+R(9), DVD+RW, DVD-R, DVD-R(9), DVD-RW, DVD-RAM, LightScribe	
<b>Max Media Capacity (read)</b>	50.0 GB	
<b>Max Media Capacity (write)</b>	8.5GB	
<b>Transport</b>	Tray Loading	

## Security

<b>HP Fingerprint Sensor (optional)</b>	<b>Mobile Voltage Operation</b>	3.0V-3.6V Single Supply
	<b>Operating Temperature</b>	32° – 158°F (0° – 70°C)
	<b>Current Consumption @ 3.3V</b>	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	<b>High-Rate Image Capture</b>	Up to 240 image frames /sec
	<b>ESD Resistance</b>	IEC 61000-4-2 Level 4 (±15KV)
	<b>Detection Matrix</b>	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

## Audio

<b>Hardware</b>	<b>Implementation</b>	IDT 92HD75B High Definition CODEC
	<b>Touch-Sensitive Volume Controls</b>	Volume up, volume down, and mute
	<b>Full Duplex</b>	Yes
	<b>Microphone In</b>	Stereo
	<b>Headphone/Line Out</b>	Stereo
	<b>Integrated Microphone</b>	Yes



## Technical Specifications

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	–110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	1.5 Watts
	Impedance	4 Ohms

## Communications

Integrated Realtek RTL8151DH-GR 10/100/1000 NIC	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
		100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
		1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)
		Auto-Negotiation (Automatic Speed Selection)
		Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
	Power Management	IEEE 802.1p QoS (Quality of Service) Support
		IEEE 802.1q VLAN support
		IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Performance Features	ACPI compliant - multiple power modes
		Situation-sensitive features reduce power consumption
	Advanced link down power saving for reducing link down power consumption	Advanced link down power saving for reducing link down power consumption
		Advanced link down power saving for reducing link down power consumption
	Manageability	TCP/IP/UDP Checksum Offload (configurable)
		Large send offload and Giant send offload
	Interface	Receiving Side Scaling
		Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)
	NIC Device Driver Name	PXE 2.1 Remote Boot
		Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))
		Comprehensive diagnostic and configuration software suite
		Virtual Cable Doctor for Ethernet cable status
		PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ
		Realtek PCIe Gb Ethernet Family Controller



## Technical Specifications

V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) <b>Optional symbol rates:</b> 2800, 3429 Asymmetric Symbol rates <b>Synchronous primary channel data signaling rates:</b> 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
	Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
	Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251



## Technical Specifications

HP un2420 EV-DO/HSPA Mobile Broadband Module	Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Maximum Data Rates	UMTS (HSPA) – 7.2 Mbps (Download ), 2.0 Mbps (Upload) CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8 Mbps (Upload)
	GPS	Standalone GPS enabled
	GPS Bands	L1 – 1575.42 MHz
	Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
	Maximum Power Consumption	2500mA (peak); 1000mA (average)
	Power Consumption, Sleep Mode	5 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard, USB 2.0 interface
	Weight	11.5 g
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	Voltage, Operating	3.3v +/- 10%
	Temperature, Operating (from TIA/EIA/IS-98-D)	–22° to 140° F (–30° to 60° C) (full RF performance) –22° to 167° F (–30° to 75° C) (reduced RF performance)
	Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	–40° to 185° F (–40° to 85° C)
	Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	Configuration Utilities	HP Connection Manager
	LED Activity	LED Off – Radio Off; Solid LED On – Radio On

Broadcom 4313GN  
802.11b/g/n

Wireless LAN Standards IEEE 802.11b  
IEEE 802.11g



## Technical Specifications

### WiFi Adapter

	IEEE 802.11n
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Win7, Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
Frequency Band	2.4 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6.5, 7.2, 13, 14.4, 19.5, 21.7, 26, 28.9, 39, 43.3, 52, 57.8, 58.5, 65, 72.2Mbps
Frequency Support	20 MHz: 2.4 GHz bands
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security <sup>1</sup>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK) <sup>2</sup>	17 dBm , nominal
Output Power (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm , nominal
Power Consumption	Idle associated: 250 mW avg (CLKREQ enabled) Idle unassociated: 425 mW avg Transmit/Receive 20 MHz channel: 5.5 W (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity <sup>3</sup>	72.2 Mbps: -71 dBm
Antenna type	High efficiency dual band antenna with spatial diversity, usually mounted in the display enclosure
Form Factor	PCI-Express Half-MiniCard
Weight	0.013 lb (6 g)
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Operating Voltage	3.3v +/- 10%
Temperature	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)



## Technical Specifications

<b>Altitude</b>	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
<b>LED Activity</b>	LED Off - Radio OFF; Solid LED On - Radio ON	
<ol style="list-style-type: none"><li>1. Check latest software/driver release for updates on supported security features.</li><li>2. Maximum output power may vary by country according to local regulations.</li><li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li><li>4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista and Win7.</li></ol>		

Broadcom 4312G 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> )
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security <sup>1</sup>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture	Ad-hoc (Peer to Peer)
	Models	Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CCK) <sup>2</sup>	17 dBm , nominal
	Output Power (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm , nominal
	Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity <sup>3</sup>	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm



## Technical Specifications

Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
<ol style="list-style-type: none"><li>1. Check latest software/driver release for updates on supported security features.</li><li>2. Maximum output power may vary by country according to local regulations.</li><li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11 b (CCK modulation) and a packet error rate of 10% for 802.11 a/g (OFDM modulation).</li><li>4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li></ol>		

### HP Integrated Module with Bluetooth 2.1+EDR Wireless Technology

Bluetooth Specification	2.1+EDR Compliant
Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 264 mW
	Peak (Rx) 231 mW
	Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant
	Microsoft Windows Plug and Play compliant
Bluetooth Software Supported	Broadcom Bluetooth for Windows
	Microsoft Windows Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves





## Technical Specifications

<b>Security</b>	Full support of Bluetooth Security Provisions	
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support	
	Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark	
<b>Temperature</b>	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating	10% to 90%
	Non-operating	5% to 95%
<b>Altitude</b>	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
<b>Bluetooth Profiles Supported</b>	Serial Port Profile (SPP) <sup>1</sup> Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) <sup>1,2</sup> Generic Object Exchange Profile (GOEP) <sup>1,2</sup> Object Push Profile (OPP) <sup>1,2</sup> File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) <sup>1,2</sup> Personal Area Networking Profile (PAN) <sup>1,2</sup> Human Interface Device Profile (HID) <sup>1,2,3</sup> FAX Profile (FAX) Basic Imaging Profile (BIP) <sup>2</sup> Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)	

1. indicates the profile is supported by Microsoft Windows XP SP2

2. indicates the profile is part of Windows Vista



## Technical Specifications

### Environmental Data

### Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Gold where HP registers commercial notebook products. See <http://www.epeat.net> for registration status in your country.

### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

### HP ProBook 4425s Notebook PC

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	10.73 W	10.81 W	10.71 W
Sleep (Energy Star low power mode)	0.67 W	0.70 W	0.66 W
Off	0.44 W	0.48 W	0.46 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	37 BTU/hr	37 BTU/hr	37 BTU/hr
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.2	24.9
Fixed Disk (random writes)	3.2	29.3

System fan is usually off except when charging the battery

### Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion  
6-cell high capacity Lithium-Ion battery (optional 8 cell available)

### Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and



## Technical Specifications

Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see [www.epeat.net](http://www.epeat.net)

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 90% recycle-able when properly disposed of at end of life.

### Packaging Materials

- External:
  - Corrugated Carton 412 g
  - Corrugated 326 g
- Internal:
  - Polyethylene low density 20 g
  - Molded Pulp 150 g
- The Corrugated Carton packaging material is made from 85% recycled content.
- The Molded Pulp packaging material is made from 90% recycled content.
- The Polyethylene low density packaging material is made from 85% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.



## Technical Specifications

### HP ProBook 4525s Notebook PC

<b>Energy Consumption</b>	115 VAC	230 VAC	100 VAC
Normal Operation	12.10 W	11.56 W	11.68 W
Sleep (Energy Star low power mode)	0.78 W	0.65 W	0.65 W
Off	0.53 W	0.44 W	0.44 W
<b>Heat Dissipation*</b>	115 VAC	230 VAC	100 VAC
Normal Operation	41 BTU/hr	40 BTU/hr	40 BTU/hr
Sleep	3 BTU/hr	2 BTU/hr	2 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

### Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	2.9	26.7
Fixed Disk (random writes)	2.8	26.5

System fan is usually off except when charging the battery

**Batteries** This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:  
CR2032 (coin cell), Li-ion  
6-cell high capacity Lithium-Ion battery (optional 8 cell available)

### Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see [www.epeat.net](http://www.epeat.net)

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.



## Technical Specifications

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 95% recycle-able when properly disposed of at end of life.

### Packaging Materials

- External:
  - Corrugated Carton 485 g
  - Corrugated 190 g
- Internal:
  - Polyethylene low density 38 g
- The Corrugated Carton packaging material is made from 80% recycled content.
- The Corrugated packaging material is made from 100% recycled content.
- The Polyethylene low density packaging material is made from 100% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### HP ProBook 4425s Notebook PC and HP ProBook 4525s Notebook PC

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

([http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates



## Technical Specifications

- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5  $\mu\text{grams}/\text{cm}^2/\text{week}$ , measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment: Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2010 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Phenom, Turion, and Athlon are registered trademarks or trademarks of AMD Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

