


## DIMENSIONS

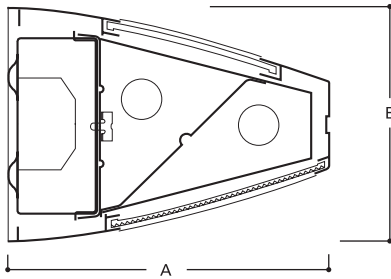

NOMINAL LENGTH	A	B
2', 3', 4'	7-1/2" (254mm)	5-1/2" (140mm)

## DESCRIPTION

The BA Series features a brushed aluminum finish that tastefully complements any interior environment. The injection molded end plates have been designed to match the brushed housing finish. The wall bracket offers effective down and up lighting functions that have been incorporated into this series with contemporary styling and architectural appeal. The BA Series also features the latest in energy efficient technology for outstanding performance. The BA Series architectural wall bracket styling contributes aesthetic appeal to contemporary decor, providing ideal lighting conditions for all areas in which comfortable, concentrated illumination is specified. Healthcare facility patient rooms, powder rooms, dressing rooms and work areas are all excellent applications.



## BA/BAU SERIES


2', 3' or 4' Wall Bracket  
1 or 2 Lamps

### SPECIFICATION GRADE ALUMINUM WALL BRACKET

- Equipped with energy saving ballast/complies with federal energy efficiency standards
- Lens and housing incorporate contemporary extruded aluminum styling
- Housing has brushed aluminum finish with matching injection molded end plates
- Optional housing finishes include white, matte black and almond
- Die formed internal steel channel with baked white enamel finish
- Attractive medium walnut trim stripe standard: oak, or matte black available
- Choice of light distribution: down only or up and down
- Available in 2', 3' or 4' lengths for versatility
- Convenience outlet and multi-level switching available, see options page
- Available with an internal baffle for up, down or combination lighting (BAUB)
- UL/CUL Listed. Suitable for damp locations.

## ORDERING INFORMATION

SAMPLE NUMBER: BA-232-120V-EB81-U

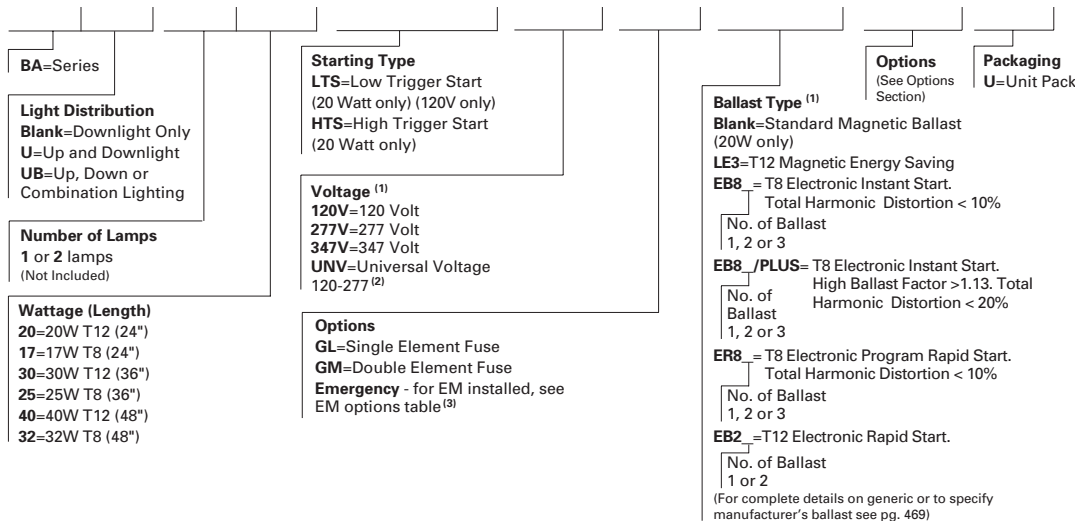

NOTES: <sup>(1)</sup> Products also available in non-US voltages and frequencies for international markets. <sup>(2)</sup> Not available when specifying emergencies, voltage must be specific. <sup>(3)</sup> Non available for 2' version.

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Representative for availability and ordering information.