


# SANYO

## Cadnica

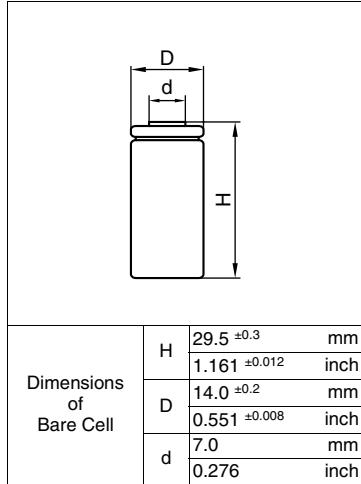


# Cell Type N-270AAS

## Specifications


Nominal Capacity		250mAh
Nominal Voltage		1.2V
Standard Charging Current		8.3mA
Charging Time		above 48Hrs.
Ambient Temperature	Charge	0°C to +80°C [+32°F to 176°F]
	Discharge	-20°C to +80°C [-4°F to 176°F]
	Storage	-30°C to +80°C [-22°F to 176°F]
Internal Impedance (Av.) (at 50% discharge)		36.0mΩ (at 1000Hz)
Weight		14g/0.49oz
Dimensions(D)×(H) (with tube)		14.5 <sup>0</sup> <sub>-0.5</sub> × 30.3 <sup>0</sup> <sub>-1</sub> mm 0.57 <sup>0</sup> <sub>-0.02</sub> × 1.19 <sup>0</sup> <sub>-0.04</sub> inch

### Typical Characteristics


#### Charge

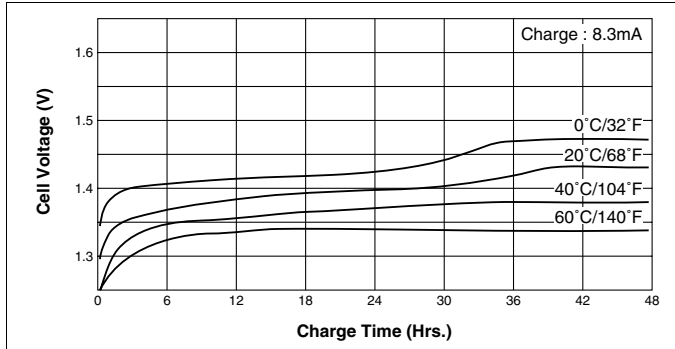


#### Discharge (at very low rate)

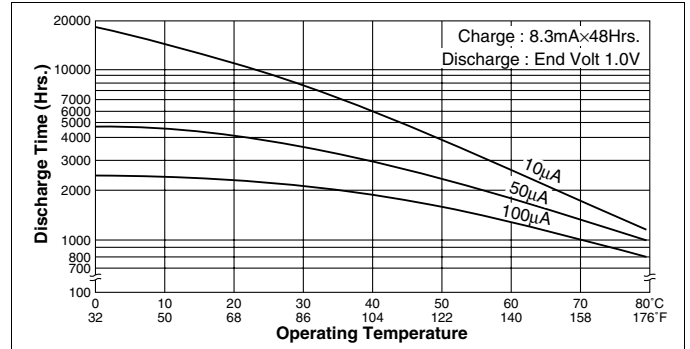


#### Cell Capacity (at various discharge rate)

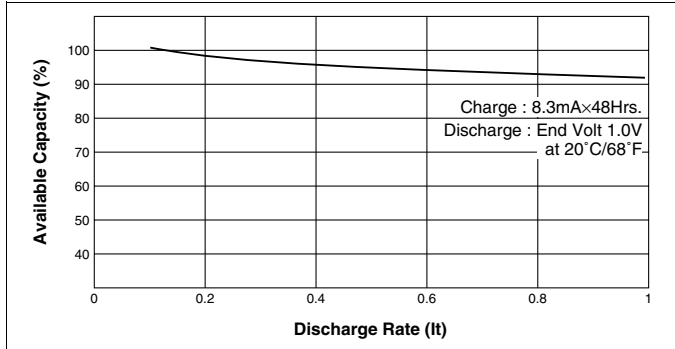

#### Discharge (at various temperature)

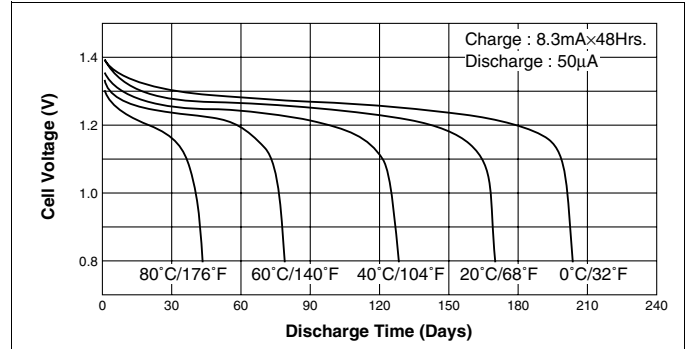

#### Discharge (at low rate)

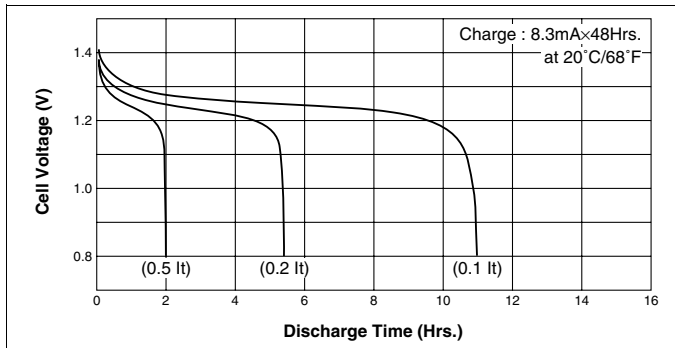

#### Temperature (Charge & Discharge)

