
OWNERIGUDE

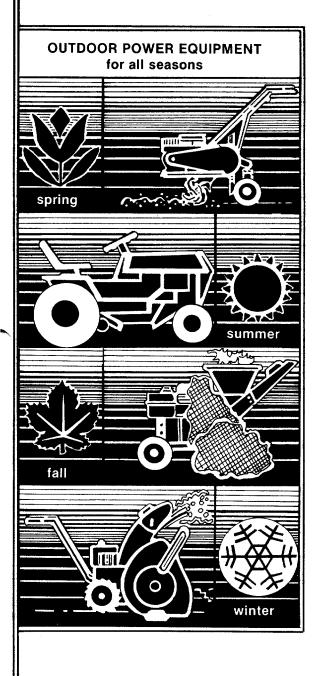

22"
SELFPROPELLED
ROTARY
MOWERS

Model Numbers 125-260-000 125-262-000

Important:

Read Safety Rules and Instructions Carefully

Thank you for purchasing an American-built product.

INDEX

Safe Operation Practices3	Maintenance11
Assembly Instructions4	Off-Season Storage
Controls	Trouble Shooting Chart
Operation	Illustrated Parts
Adjustments9	Repair Parts List17, 18
Lubrication	Parts Information Back Cover

LIMITED WARRANTY

For one year from the date of original retail purchase, MTD PRODUCTS INC will either repair or replace, at its option, free of charge, F.O.B. factory or authorized service firm, any part or parts found to be defective in material or workmanship. Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. Transportation charges for any parts submitted for replacement under this warranty must be paid by the purchaser unless such return is requested by MTD PRODUCTS INC.

This warranty will not apply to any part which has become inoperative due to misuse, excessive use, accident, neglect, improper maintenance, alterations, or unless the unit has been operated and maintained in accordance with the instructions furnished. This warranty does not apply to the engine, motor, battery, battery charger or component parts thereof. Please refer to the applicable manufacturer's warranty on these items.

This warranty will not apply where the unit has been used commercially.

Warranty service is available through your local authorized service dealer or distributor. If you do not know the dealer or distributor in your area, please write to the Customer Service Department of MTD.

The return of a complete unit will not be accepted by the factory unless prior written permission has been extended by MTI).

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.



This unit is equipped with an internal combustion engine and should not be used on or near any unimproved forest-covered, brush-covered or grass-covered land unless the engine's exhaust system is equipped with a spark arrester meeting applicable local or state laws (if any). If a spark arrester is used, it should be maintained in effective working order by the operator.

In the State of California the above is required by law (Section 4442 of the California Public Resources Code). Other states may have similar laws. Federal laws apply on federal lands. A spark arrester muffler is available at your nearest engine authorized service center.



To reduce the potential for any injury, comply with the following safety instructions. Failure to comply with the instructions may result in personal injury.

SAFE OPERATION PRACTICES FOR WALK-BEHIND MOWERS

TRAINING

- Read this owner's manual carefully in its entirety before attempting to assemble or operate this machine. Be completely familiar with the controls and the proper use of this machine before operating it. Keep this manual in a safe place for future and regular reference and for ordering replacement parts.
- Your rotary mower is a precision piece of power equipment, not a plaything. Therefore, exercise extreme caution at all times.
- Never allow children to operate a power mower. Only persons well acquainted with these rules of safe operation should be allowed to use your mower.
- No one should operate this unit while intoxicated or while taking medication that impairs the senses or reactions
- 5. Keep the area of operation clear of all persons, particularly small children and pets. Stop engine when they are in the vicinity of your mower. Although the area of operation should be completely cleared of foreign objects, an object may have been overlooked and could be accidently thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.

PREPARATION

- Thoroughly inspect the area where the equipment is to be used. Remove all stones, sticks, wire, bones and other foreign objects which could be picked up and thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.
- Do not operate equipment when barefoot or wearing open sandals. Always wear substantial footwear.
- Do not wear loose fitting clothing that could get caught on the mower.
- 4. Check the fuel before starting the engine. Gasoline is an extremely flammable fuel. Do not fill the gasoline tank indoors, while the engine is running, or while the engine is still hot. Wipe off any spilled gasoline before starting the engine as it may cause a fire or explosion.
- Disengage the self-propelled mechanism or drive clutch on units so equipped before starting the engine.
- 6. The blade control handle is a safety device. Never attempt to bypass its operation. Doing so makes the safety device inoperative and may result in personal injury through contact with the rotating blade. The blade control handle must operate easily in both directions.
- 7. Never attempt to make a wheel or cutting height adjustment while the engine is running.
- 8. Mow only in daylight or in good artificial light.

 Never operate the equipment in wet grass. Always be sure of your footing. A slip and fall can cause serious personal injury. Keep a firm hold on the handle and walk, never run.

OPERATION

- Do not change the engine governor settings or overspeed the engine. Excessive engine speeds are dangerous.
- 2. Do not put hands or feet near or under rotating parts. Keep clear of the discharge opening at all times as the rotating blade can cause injury.
- Stop the blade when crossing gravel drives, walks or roads.
- 4. After striking a foreign object, stop the engine, remove the wire from the spark plug, and thoroughly inspect the mower for any damage. Repair the damage before restarting and operating the mower.
- If the equipment should start to vibrate abnormally, stop the engine and check immediately for the cause. Vibration is generally a warning of trouble.
- 6. Shut the engine off and wait until the blade comes to a complete stop before removing the grass catcher or unclogging the chute. The cutting blade continues to rotate for a few seconds after the engine is shut off. Never place any part of the body in the blade area until you are sure the blade has stopped rotating.
- Before cleaning, repairing or inspecting, make certain the blade and all moving parts have stopped.
 Disconnect the spark plug wire, and keep the wire away from the spark plug to prevent accidental starting.
- 8. Do not run the engine indoors.
- Mow across the face of slopes, never up-and-down. Exercise extreme caution when changing direction on slopes. Do not mow excessively steep slopes. Always be sure of your footing. A slip and fall can cause serious personal injury.
- 10. Always disconnect electric mowers (line operated) before cleaning, repairing or adjusting.
- 11. Never operate mower without proper guards, plates or other safety protective devices in place.

MAINTENANCE AND STORAGE

- 1. Check the blade and engine mounting bolts at frequent intervals for proper tightness.
- 2. Keep all nuts, bolts, and screws tight to be sure the equipment is in safe working condition.
- Never store the equipment with gasoline in the tank inside of a building where fumes may reach an open flame or spark. Allow the engine to cool before storing in any enclosure.
- 4. To reduce fire hazard, keep the engine free of grass, leaves, or excessive grease.
- Check the grass catcher bag frequently for wear or deterioration. For safety protection, replace only with new bag meeting original equipment specifications.



This unit is shipped WITHOUT GAS-OLINE or OIL. After assembly, see separate engine manual for proper fuel and engine oil recommendations.




FIGURE 1.




FIGURE 2.




FIGURE 3.

ASSEMBLY INSTRUCTIONS



Reference to right or left hand side of the mower is observed from the operating position.

Contents of Hardware Pack: (See figure 1)

- A (1) Rope Guide Bolt
- B (1) Curved Carriage Bolt
- C (2) Lock Washers 5/16" I.D.
- D (2) Hex Nuts 5/16-18 Thread
- E (3) Hairpin Cotters
- F (1) Ferrule
- G (2) Cable Ties
- H (1) Plastic Plug (Not Shown)
- Remove lawn mower and loose parts from carton. Make certain all parts and literature have been removed from the carton before the carton is discarded.
- Extend the throttle control cable (attached to the upper handle) and the brake cable (attached to the engine) and place on the floor. Be careful not to bend or kink control cables.
- 3. Attach the lower handle by placing the bottom holes in the lower handle over the weld pins on the handle mount brackets. The hole in the lower handle which is for the clutch rod must be on the **left** side of the handle. Secure with hairpin cotters (E) in inner holes on weld pins.

 See figure 2.



There are two (2) holes in the handle mount brackets. Place the hairpin cotter in the inner hole for operation. Outer hole is for storage.



It may be necessary to bend the ends of the lower handle outward slightly to obtain a tight fit against the handle mount brackets.

4. Place the upper handle in position over the lower handle. The control housing must be on the right hand side of the handle. Secure the left hand side of upper handle using the curved head bolt (B), lock washer (C) and hex—nut (D) as shown in figure 3.



The right hand side of the handle will be secured with the rope guide bolt. However, left handed operators may assemble the rope guide bolt to the left side of the handle for easier starting.




FIGURE 4.

- 5. Insert the rope guide bolt (A) through the right hand side of upper and lower handle.6. The starter rope is wound around the starter.
- 6. The starter rope is wound around the starter handle. Maintain the tension on the rope as you unwind it.
- 7. Slip the starter rope into the rope guide bolt
 as shown in figure 4. Secure the rope guide
 bolt with lock washer (C) and hex nut (D). If
 more slack is needed in the starter rope,
 disconnect and ground the spark plug wire.
 Depress the blade control handle and pull additional rope out from the engine.





FIGURE 5.



Brake cable must be assembled as shown for proper blade brake operation.

9. Hook the "Z" end of the brake cable into the hole in the blade control handle. See figure 5.


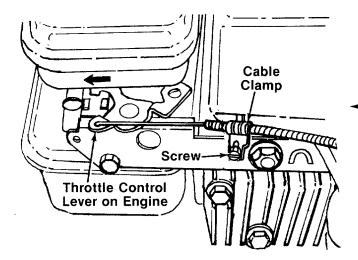



FIGURE 6.

- 10. Place the throttle control lever on the handle in "Fast" position.
- 11. Push the throttle control lever on the engine to the full open position (as far toward the outside of the unit as it will go) as shown in figure
 6.
- 12. Hook the "Z" end of the throttle control cable into the hole in the control lever on the engine.
- 13. Remove the screw on the cable clamp shown in figure 6. Slip the control casing under the clamp. With the throttle lever on the engine still in the full open position, replace and tighten the screw to secure the throttle control cable.

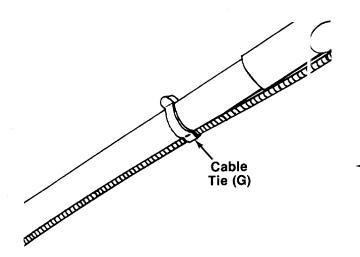


14. Secure throttle control and brake cables to upper and lower handles with cable ties (G). See figure 7.

FIGURE 7.

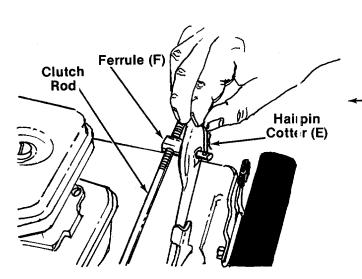

- 15. Thread the clutch rod into the ferrule (F) until the ferrule lines up with the hole in the lower handle. Secure ferrule in handle with cotter pin (E) as shown in figure 8. Check for 1/8" clearance between drive pinion and front wheels. See clutch rod adjustment on page 10.
 - 16. Insert plastic plug (H) into hole in the top rear of the deck by slipping one end of plug into hole, then pressing down on the other end of plug
- 17. Check all nuts and bolts for correct tightness.

FIGURE 8.





CAUTION

Please note that the chute deflector on your mower is in an upright position. It is held in that position by a shipping block. This block is used for shipping purposes only. It must be removed and discarded before your mower is put into operation. See figure 9.

FIGURE 9.

CONTROLS




FIGURE 10.
BLADE CONTROL HANDLE

WARNING THIS CONTROL MECHANISM IS A SAFETY DEVICE NEVER ATTEMPT TO BYPASS ITS OPERATIONS

The blade control handle is located on the upper handle of the mower. See figure 10. The blade control handle must be depressed in order to operate the unit. Release the blade control handle to stop the engine and blade.



The blade will be rotating whenever the engine is running.

THROTTLE CONTROL

The throttle control is located on the right side of the upper handle. It is used to regulate the engine speed. The engine should be started with the engine in the FAST or START position.



The throttle control cannot be used to stop the engine.

RECOIL STARTER

The recoil starter handle is attached to the handle. See figure 10. Stand behind the unit in the operating position to start the unit.

OPERATION



FIGURE 11.

Keep hands and feet away from the chute area on cutting deck. See figure 11.



For shipping purposes your mower is set with the wheels in a low cutting height position. For best results raise the cutting position until it is determined which height is best for your lawn. See cutting height adjustment section.

BREAK-IN INSTRUCTIONS

This mower should be broken in following the procedure described below. The added effort here will double the service life of the unit. Particular attention should be paid to the drive assembly adjustment.

- Before starting the engine, lubricate all the bronze bearings on the drive shaft. The same oil which is used for the engine may be used for this.
- 2. Check drive assembly adjustment. When the handle is lifted, the clutch rod is moved to the self-propelled position. The black nylon drive pinions should mesh simultaneously with the gear tread tires. When the handle is lowered, the pinions should clear the wheels by 1/8". See clutch rod adjustment for further details.

BEFORE STARTING

- 1. Follow "Break-In Instructions." See abo re.
- 2. Fill sump with oil as instructed in the separate engine manual packed with your unit.
- 3. Fill fuel tank, using clean, fresh, lead-free, low lead, or regular grade leaded gasoline. Fill tank completely!

DO NOT MIX OIL WITH GASOLINE.

4. Attach spark plug wire to spark plug.

TO START ENGINE AND ENGAGE BLADE

- 1. Make sure handle is all the way back (freewheeling position).
- 2. Move the throttle control lever to FAST or START position.
- 3. Standing behind the unit, depress the plade control handle and hold it against the upper handle as shown in figure 12.
- Grasp the recoil starter handle as shown and pull up rapidly. Return it slowly to the rope guide bolt.
- After engine starts, move throttle control lever to desired speed.



When starting the unit, place the unit facing a solid object to stop it if it is not correctly adjusted to be in "Neutral" position. If the unit shows signs of motion with the handle back in the "free-wheeling" position, shut off the engine immediately. Readjust the clutch rod as necessary. See clutch rod adjustment on page 10.




FIGURE 12.

TO STOP ENGINE AND BLADE

1. Release the blade control handle to stop the engine and blade.



The blade continues to rotate for a few seconds after the engine is shut off.

2. Disconnect the spark plug wire and ground it against the engine to prevent accidental starting while equipment is unattended.

TO ENGAGE DRIVE

Move the handle forward for self-propelled operation. The drive pinions will engage with the gear tread tires, and forward drive results.

To stop the forward drive, lower the handle. The unit will be free-wheeling. Self-propelled drive is resumed when handle is raised.

When operating this mower, unnecessary or excessive engaging of the drive pinions with the wheels should be avoided. Minimize the number of times the handle is raised and lowered. Failure to observe this operating rule can reduce the service life of the front tires and drive pinions substantially. When engaging the self-propelled mechanism, a slight forward push on the mower as the drive pinions and the gear tread tires mesh will add to smoother and quieter operation and will add substantially to the service life of both the tires and the drive pinions.

USING YOUR ROTARY MOWER

Be sure that lawn is clear of stones, sticks, wire, or other objects which could damage lawn mower or engine. Such objects could be accidently thrown by the mower in any direction and cause serious personal injury to the operator and others.

Operate a new engine at intermediate speeds and light load for the first few hours as you would a new automotive engine.

For best results, do not cut wet grass because it tends to stick to the underside of the mower, preventing proper discharge of grass clippings, and could cause you to slip and fall. New grass, thick grass or wet grass may require a narrower cut. Blade speed should be adjusted to the condition of the lawn.

The best mowing pattern is one that allows the clippings to discharge towards the uncut part of the lawn. This permits recutting of the clippings to further pulverize them. When cutting high weeds, discharge towards cut portion, then recut at right angles to first direction.

For best results, cut off one-third or less of the total length of the grass. Lawn should be cut in the fall as long as there is growth.

This mower is designed to be operated at full throttle to give you the best cut and do the most effective job of bagging the cut grass.



If you strike a foreign object, stop the engine. Remove wire from spark plug, thoroughly inspect the mower for any damage, and repair the damage before restarting and operating the mower. Extensive vibration of the mower during operation is an indication of damage. The unit should be promptly inspected and repaired.

ADJUSTMENTS



Do not at any time make any adjustment to lawn mower without first stopping engine and disconnecting spark plug wire.

CUTTING HEIGHT ADJUSTMENT Units Without Height Adjustment Brackets

Adjustment may be made by removing and moving axle bolts to desired position. Cutting heights will be raised as axle bolts are moved to a lower hole and lowered as axle bolts are moved to a higher hole in the deck. All axle bolts must be mounted in the same relative position to the deck. Cupped side of belleville washers must be against the deck.

To change the height of the front wheels, proceed as follows:

- 1. Place the front of mower deck on a block so that the front wheels are off the ground.
- 2. Remove the hairpin cotter from ferrule, located on clutch rod.
- 3. Slip the ferrule out of the lower handle.

4. With an adjustable wrench, remove the axle bolt, front wheel and belleville washer. See figure 13.

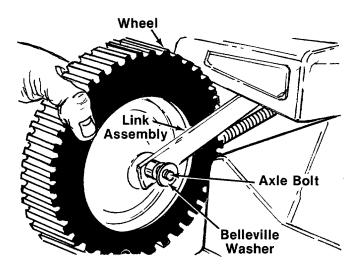


FIGURE 13.



When axle bolt is removed from deck, the link assembly is under spring tension and will pivot back against the deck.

- 5. Reassemble in selected hole. Cupped side of belleville washer must be toward the deck.
- 6. Raise the handle. Adjust ferrule and clutch rod (see clutch rod adjustment section). Slide ferrule into hole in lower handle. Secure with hairpin cotter.

Units With Height Adjustment Brackets

An adjusting plate and thumb lever at each wheel position provides cutting height adjustment. Each adjusting plate has five holes. Height of cut will be changed when the thumb lever is moved from one hole to another. Simply depress the lever towards wheel and move wheel and lever assembly to desired position. See figure 14.

Cutting height will be raised as the levers are lowered. Cutting height will be lowered as the levers are raised. All wheels must be positioned at the same height.

For rough or uneven lawns, move the wheels to a position which will give a higher cutting height.



Clutch rod **must** be adjusted each time cutting height is changed.

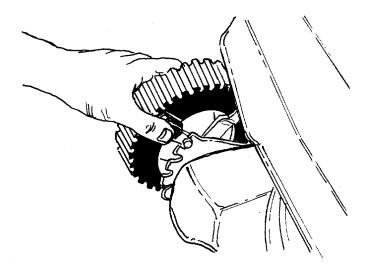


FIGURE 14.

CLUTCH ROD ADJUSTMENT

The drive pinion should be about 1/8" from the drive wheels when the clutch is disengaged (handle is **not** pushed forward). See figure 15.

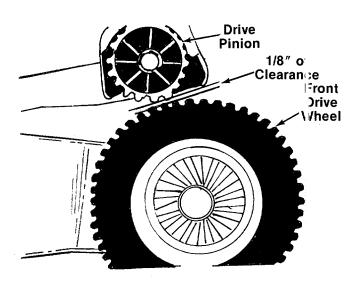


FIGURE 15.

If there is not 1/8" of clearance, proceed as follows:

- 1. Remove the cotter pin. See figure 8.
- 2. Pull the clutch rod and ferrule out of the lower handle.
- 3. Thread the ferrule on or off the roc as necessary.
- 4. Place ferrule back in position and secure with cotter pin. If the engagement and clearance are still not correct, repeat the above steps until 1/8" of clearance is obtained and the crive mechanism engages properly.

The clutch rod must be adjusted each time the cutting height is changed. Figure 16 illustrates the clutch rod setting for the lowest cutting height. As the cutting height is raised, the ferrule must be moved toward the end of the rod. See figure 16.




FIGURE 16.

CHAIN ADJUSTMENT

- Loosen (do not remove) two sems hex bolts.
 See figure 17.
- 2. Pull pivot plate forward by hand. Do not force.
- 3. Tighten cap screws and check chain tension. Repeat adjustment if necessary.

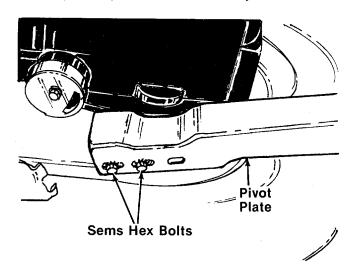


FIGURE 17.

THROTTLE

If adjustment becomes necessary, the throttle control wire assembly can be reset as follows:

 Loosen, but do not remove, screw securing throttle control wire assembly at engine. See figure 6.

- 2. Move throttle control lever on handle to "FAST" position.
- Move control lever on engine to full open position. Retighten screw to secure throttle control wire assembly.

CARBURETOR ADJUSTMENTS



If any adjustments are made to the engine while the engine is running (e.g. carburetor), keep clear of all moving parts. Be careful of heated surfaces and muffler.

Minor carburetor adjustment may be required to compensate for differences in fuel, temperature, altitude and load.

Refer to the separate engine manual packed with your mower for carburetor adjustment information.

LUBRICATION



Always stop engine and disconnect spark plug wire before cleaning, lubricating or doing any kind of work on lawn mower.

Blade Control—Lubricate the pivot points on the blade control handle and the brake cable at least once a season with light oil. See figure 18. The blade control must operate freely in both directions.




FIGURE 18.

Chute Deflector—The torsion spring and pivot point should be lubricated periodically with light oil to prevent any rust or binding. Deflector must work freely.

Wheels—Front and rear wheel bearings are of self-lubricating Fortiflex. They require no lubrication. However, if the wheels are removed for any reason, lubricate the surface of the axle bolt and the inner surface of the wheel with light oil. A 4 oz. plastic bottle of light oil lubricant is available. Order part number 737-0170. Engine oil may also be used.

Engine—Follow engine manual for lubrication instructions.

Throttle—Periodically Iubricate throttle control lever and throttle wire assembly with a few drops of light oil for ease of operation.

MAINTENANCE



When tipping the unit, empty the fuel tank and keep engine spark plug side up.

CUTTING BLADE

A. Removal for Sharpening or Replacement



Be sure to disconnect and ground the spark plug wire before working on the cutting blade to prevent accidental engine starting.

Remove the large bolt and lock washer which holds the blade and adapter to the engine crankshaft. Remove the blade and adapter from the crankshaft.

If the blade or blade adapter needs replacing, remove the two small bolts, lock washers and nuts which hold the blade to the adapter.



CAUTION

Periodically inspect the blade adapter for cracks, especially if you strike a foreign object. Replace when necessary.

B. Sharpening

Remove the cutting blade by following the directions of the preceding section.

When sharpening the blade, follow the or ginal angle of grind as a guide. It is extremely important that each cutting edge receives an equal amount of grinding to prevent an unbalanced blade. An unblanced blade will cause excessive vibration when rotating at high speeds, may cause damage to the mower and could break, causing personal injury.

It is recommended that the blade always be removed from the adapter for the best test of balance. The blade can be tested by balancing it on a round shaft screwdriver. Remove meta from the heavy side until it balances evenly.

C. Reassembly

Before reassembling the blade and the blade adapter to the unit, lubricate the engine crankshaft and the inner surface of the blade adapter with light oil. Lubricating the bolt holes, bolts and inner surface of the nuts with light oil is also recommended. A 4 oz. plastic bottle of light oil lubricant is available. Order part number 737-0170. Engine oil may also be used.

When replacing the blade, be sure to install the blade with the side of the blade marked "Bottom" (or with part number) facing the ground when the mower is in the operating position.

Blade Mounting Torque

3/8" Dia. Bolt 375 in. lb. min., 450 in. lb. max. 5/16" Dia. Bolt 150 in. lb. min., 250 in. lb. max.

To insure safe operation of your unit, all nuts and bolts must be checked periodically for correct tightness.

DECK

The underside of mower deck should be cleaned after each period of use as grass clippings, leaves, dirt and other matter will accumulate. This accumulation of grass clippings, etc., is undesirable as it will invite rust and corrosion and may cause an uneven discharge of grass clippings at the next cutting.

The deck may be cleaned by tilting the mower forward or on its side and scraping clean with a suitable tool or by washing with a stream of water from a garden hose.



Do not direct the stream of water at a hot engine as damage to the engine may result.

ENGINE OIL

Check oil level before starting engine and after every 5 hours of operation. ADD oil as necessary to keep level to full mark on dipstick. Before removing dipstick, clean area around dipstick to prevent dirt from entering oil fill opening. Engine should be in a level position when checking oil.

Change oil after first 5 hours of operation. Thereafter change every 25 hours. Change oil while engine is warm. Oil may be drained thru oil drain on bottom of engine. Oil capacity 1-1/4 pints.

AIR CLEANER

Service air cleaner every 25 hours under normal conditions. Clean every few hours under extremely dusty conditions. Poor engine performance and flooding usually indicates that the air cleaner should be serviced.

To service the air cleaner, refer to the separate engine manual packed with your unit.

SPARK PLUG

The spark plug should be cleaned and the gap reset once a season. Spark plug replacement is recommended at the start of each mowing season; check engine manual for correct plug type and gap specifications.

OFF-SEASON STORAGE

The following steps should be taken to prepare lawn mower for storage.

- Clean and lubricate mower thoroughly as described in the lubrication instructions.
- 2. Refer to engine manual fcr correct engine storage instructions.
- Coat mower's cutting blade with chassis grease to prevent rusting.
- 4. Store mower in a dry, clean area.



When storing any type of power equipment in an unventilated or metal storage shed, care should be taken to rustproof the equipment. Using a light oil or silicone, coat the equipment, especially chains, springs, bearings and cables.

HANDLE STORAGE

The handle may be placed in an upright position for storage.

Remove the hairpin cotter from the ferrule on the clutch rod. Remove the ferrule from the handle. Move hairpin cotters to outer hole on weld pins. See figure 2. Press inward on the bottom of the lower handle and push forward. The handle will lock in this position.

To place the handle in the operating position, remove the starter rope from the rope guide bolt. Grasp the lower handle at the bottom, pull inward

slightly and tip the handle backward. Place the cotter hairpins in the inner holes. With the spark plug wire disconnected and grounded, depress the blade control handle and pull the starter rope out from the engine. Slip the starter rope into the rope guide bolt. Reassemble the clutch rod.



Be certain to check the clutch rod adjustment.



The use of any accessory on this Rotary Mower other than those manufactured by the mower manufacturer is **not** recommended.

GRASS CATCHER Model 365 is available as optional equipment for the mower shown in this mar ual.



- 1. DO NOT operate the mower without the entire grass catcher or chute deflector in place.
- 2. DO NOT operate the mower without the protective shield on the rear of the deck in place.




Under normal usage bac material is subject to wear and should be checked periodically. Be sure any replacement bag complies with the mower manufacturer's recommendations.

For replacement bags, use only factory authorized replacement bag No. 764-0217.

Trouble Shooting Chart

	Treable chooting	Onare
Problem	Cause	Remedy
1 Engine fails to start	A Blade control handle disengaged B Check fuel tank for gas C Spark plug lead wire discon-	A Engage blade control handle.B Fill tank if empty.C Connect lead wire.
·	nected. D Throttle control lever not in the starting position E Faulty spark plug	 D Move throttle lever to start position. E Spark should jump gap between control electrode and side electrode. If spark does not jump, replace the spark plug.
	F Carburetor improperly adjusted, engine flooded	F Remove spark plug, dry the plug, crank engine with plug removed, and throttle in off position. Replace spark plug and lead wire and resume starting procedures.
	G Old stale gasoline H Engine brake engaged	G Drain and refill with fresh gasoline.H Follow starting procedure.
2 Hard starting or	A Spark plug wire loose	A Connect and tighten spark
loss of power	B Carburetor improperly adjusted C Dirty air cleaner	plug wire. B Adjust carburetor. See separate engine manual. C Clean air cleaner as described in separate engine manual.
3 Operation erratic	A Dirt in gas tank	A Remove the dirt and fill tank
	B Dirty air cleaner	with fresh gas. B Clean air cleaner as described
	C Water in fuel supply	in separate engine manual. C Drain contaminated fuel and fill tank with fresh gas.
	D Vent in gas cap plugged E Carburetor improperly adjusted	 D Clear vent or replace gas cap. E Adjust carburetor. See separate engine manual.
4 Occasional skip (hesitates) at high speed	 A Carburetor idle speed too slow B Spark plug gap too close C Carburetor idle mixture adjustmer t improperly set 	 A Adjust carburetor. See separate engine manual. B Adjust to .030". C Adjust carburetor. See separate engine manual.
5 Idles poorly	 A Spark plug fouled, faulty, or gap too wide B Carburetor improperly adjusted C Dirty air cleaner 	 A Reset gap to .030" or replace spark plug. B Adjust carburetor. See separate engine manual. C Clean air cleaner as described in separate engine manual.
6 Engine overheats	A Carburetor not adjusted properly B Air flow restricted C Engine oil level low	 A Adjust carburetor. See separate engine manual. B Remove blower housing and clean as described in separate engine manual. C Fill crankcase with the proper
7 Excessive vibration	A Cutting blade loose or unbalanced B Bent cutting blade	A Tighten blade and adapter. Balance blade.
Note: For repairs howard th		B Replace blade.

Note: For repairs beyond the minor adjustments listed above, contact your local authorized service dealer.

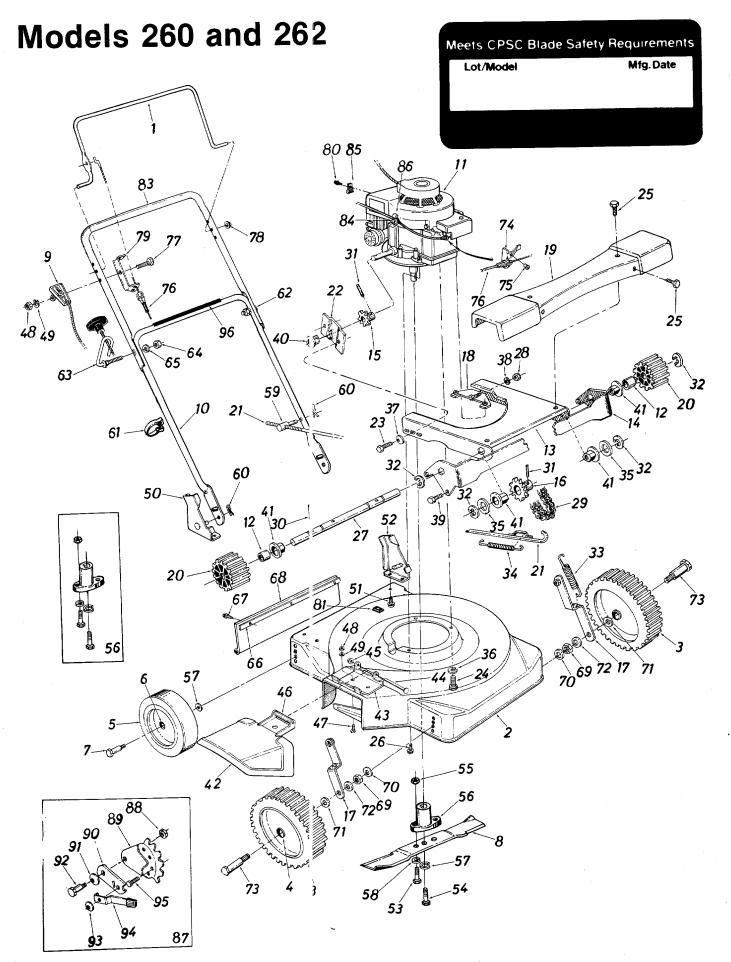

Models 260 and 262

PARTS LIST FOR MODELS 260 AND 262 ROTARY MOWERS

	EF. O.	PART NO.	COLOR	DESCRIPTION		REF.	T	DESCRIPTION	NEW PART
	1	747-050		Control Handle—R.H.	N	43	11130	Adapter Plate	3111
	2	14918		22" Deck Ass'y.		44	711-0555	Pivot Pin	1
;	3	734-053		Wheel Ass'y.—Front 8 x 1.75		45	726-0106	Push Nut 1/4" Rod	
	4	741-026	2	Flange Brg. (Plastic)		46	732-0253	Torsion Spring	
	5	**		Wheel Ass'y.—Rear 8 x 1.75		47	710-0289	Hex Bolt 1/4-20 x .50" Lg.*	
- - (6	741-026		Flange Brg. (Plastic)		48	712-0287	Hex Nut ¼-20 Thd.*	
'	7	738-021	3	Axle Bolt—Rear (260)		49	736-0329	L-Wash. 1/4" I.D.*	
İ		738-010	2	Axle Bolt—Rear (262)	ĺ	50	14164	Handle Brkt. Ass'y.—R.H.	
		742-012		Blade 22"	İ	51	710-0603	Hex Wash. Hd. Self-Tap Scr.	
9	9	746-056	0	Throttle Control Ass'y.		l		5/16-18 x .50" Lg.	
١.,	_			Comp.	N	52	14165	Handle Brkt. Ass'y.—L.H.	
10		749-039		Lower Handle (Chrome)		53	710-0888	Hex Bolt 5/16-24 x 1.00" Lg.	
۱.		749-044	6	Lower Handle (Painted)				(Grade 5) (Special)	
11		-		Engine		54	710-0331	Hex Bolt 3/8-24 x 2.25" Lg.	
12	2	02265		Crank Spacer .632" I.D. x				(Grade 5)	
14	,	10070		.75" O.D. x .442		55	712-0123	Hex Nut 5/16-24 Thd.*	1
1(10370		Pivot Plate		56	753-0348	Blade Adapter Kit	
14		10372		Drive Support		57	736-0217	Bell-Wash400" I.D. x .88"	
15		10377		Sprocket Ass'y.				O.D.	
17		10378 10379		Sprocket Ass'y.		58	736-0119	L-Wash. 5/16" I.D.*	
18		10379	1	Link Ass'y. Engine Bracket Ass'y.		59	711-0570	Engagement Ferrule	
19		10913	ļ	Drive Cover		60	714-0104	Intern. Cot. Pin 5/16" Dia.	
20		10913		Drive Cover Drive Pinion		61	726-0192	Cable Tie	
21		12613		Clutch Rod Ass'y.		62	710-0671	Curved Carriage Bolt 5/16-18	İ
22	5	13708		Bearing Support		00	740.0040	_ x 1.38" Lg.	
23		710-0352		Hex "B"-Tap Scr. 1/4 x .38"		63	710-0842	Rope Guide Bolt	
1	1	1 10 0002	-	Lg.		64	712-0267	Hex Nut 5/16-18 Thd.*	
24	1	710-0442	,	Hex Bolt 5/16-18 x 1.50" Lg.*		65 66	736-0119	L-Wash. 5/16" I.D.*	
25		710-0599		Hex Wash. Self-Tap Scr.		67	14836	Retainer Strip	
				½ -20 x .50" Lg.		01	710-0776	Hex Wash. Hd. Self-Tap Scr.	
26	3	710-0654	1	Hex Wash. Hd. TT-Tap Scr.	[68	731-0587	1/4 x .62" Lg.	
1		_		3/8-16 x 1.00" Lg.		69	712-0266	Rear Flap Ass'y.	
27	7	711-0435	5	Shaft		03	7 12-0200	Hex Cent. L-Nut 3/8-16 Thd. (260 Only)	
28	}	712-0116		Hex Ins. L-Nut 3/8-24 Thd.		70	736-0105	Bell-Wash400" I.D. x .88"	
29) [713-0135		#48 Chain 1/2" Pitch x 51	- 1	.	700 0100	O.D.	
				Links		71	736-0160	FI-Wash531" I.D. x .930"	
		713-0122	<u>}</u> ∣	Master Link	ľ	•	100 0100	O.D.	1 1
30)]	715-0246	6	Spring Pin Spir. 3/16" Dia. x	-	72	736-0300	Fl-Wash385" I.D. x .87" O.D.	
				1.25" Lg.		_		(260 Only)	
31		715-0247	' (Spring Pin Spir. 3/16" Dia. x		73	738-0414	Axle Bolt—Front (260)	
1		- 40 - : = :		1.00" Lg.			738-0144	Axle Bolt—Front (262)	
32		716-0106)	"E"-Ring for .625" Dia. Shaft		74	14924	Cable Brkt.	
33		732-0209	' [Extension Spring .47" O.D. x			726-0171	Pop Rivet .156" Dia. x .379	
104	-	700 0 400	, I.	2.03" Lg.	1		746-0552	Control Cable—49	N
34	· '	732-0433	· [Extension Spring .50" O.D. x	. 1	77	710-0106	Hex Bolt 1/4-20 x 1.25" Lg.*	'
25	.	726 0440	.].	5.0" Lg.			726-0135	Cap Speed Nut 5/16" Rod	
35	1	736-0116	·	FI-Wash635" I.D. x .93"			16201	Cable Mounting Brkt.	N
36	-	726 0440		O.D. x .060		80	710-0227	Hex Wash. Hd. Self-Tap Scr.	'
37		736-0119 736-0175		Wash. 5/16" I.D.*		_		#8 x .38" Lg.	
31	'	736-0175	, S	SprWash270" I.D. x .57"			731-0564	Plastic Plug	
38	-	736-0300		O.D. x .025 FI-Wash385" I.D. x .87"			749-0536	Upper Handle (Chrome)	
1 30	'	- JU-UJUU		O.D. x .06			749-0538	Upper Handle (Painted)	
_~ 39	-	738-0147		Shid. Bolt .500" Dia. x .170			710-0429	Hex B-Tap Scr. #10 x .38"	
40		748-014 <i>7</i>		Flange Brg.			751-0369	Casing Clamp	
41		748-0227		Hex Flange Brg630" I.D.		86	12894	Casing Clamp	
42		11679		Chute Deflector Ass'y.					- 1
"-			1	Comp.]			·	
<u> </u>									t

PARTS LIST FOR MODELS 250 AND 262 ROTARY MOWERS (CONTINUED)

REF. NO.	PART NO.	COLOI	DESCRIPTION	NEW PART
87	12321		Height Adj. Ass'y. Comp.—	
	12322		L.H. (262 Only) Height Adj. Ass'y. Comp.— R.H. (262 Only)	
88	712-0375		Hex Cent. L-Nut 3/8-16 Thd. (262 Only)	
89	12323		Index Plate (262 Only)	
90	10619		Pivot Bar (262 Only)	
91	736-0255		Belleville Washer (262 Only)	
92	738-0269		Shid. Bolt (262 Only)	
93	736-0105		Belleville Wash. 3/8" I.D.	
94	10531		Spring Lever Ass'y. w/Knob (262 Only)	
95	710-0209		Hex Sems Bolt 3/8-16 x .62" Lg.* (262 Only)	
96	777-34	77-3455 Instruction Label—Handle		
	8260-000-5		Hardware Pack]

^{*}For faster service contain standard nuts, bolts and washers locally. If these items cannot be obtained locally, order by part number and size as shown on parts list.

(462-Red Flake)

When ordering parts if color or finish is important, use color code shown above. (e.g. Red Flake—11430 (462).)

** Rear Wheel Assembly

Tre ad	Part No.
Waffle	734-0894
Twinline	734-0879
Sm ooth	734-0849
Gear	734-0538



This instruction manual covers various models and all spec fications shown do not necessarily apply to your model. Specifications subject to change without notice or obligation.

NOTE: The engine is not under warranty by the mower manufacturer...If repairs or service is needed on the engine, please contact your nearest author-

ized engin) service outlet. Check the 'Yellow Pages' of your telept one book under "Engines— Jasoline." .

PARTS INFORMATION

POWER EQUIPMENT PARTS AND SERVICE

Parts and service are available through the authorized service firms listed below. All orders should specify the model number of your unit, part numbers, description of parts and the quantity of each part required.

BRIGGS AND STRATTON, TECUMSEH AND PEERLESS PARTS AND SERVICE

Briggs & Stratton, Tecumseh and Peerless parts and service should be handled by your nearest authorized engine service firm. Check the yellow pages of your telephone directory under the listing **Engines—Gasoline**, Briggs & Stratton or Tecumseh Lauson.

NOTE: If any parts are found to be missing or defective upon assembly of this unit, write to advise the factory so that immediate replacement can be made.

ALABAMA	BIRMINGHAM	оню	CARROLL
Auto Electric & Carburetor Co	2625 4th Ave. S	Stebe's Mid-State Mower Supply	Box 366, 71 High St 43112
ARKANSAS Sutton's Lawn Mower Shop	NORTH LITTLE ROCK	Bleckrie, Inc	CLEVELAND 44102
Sutton's Lawn Mower Shop	5301 Roundtop Drive	Bleckrie, Inc.	/900 Lorain Ave 44 102
CALIFORNIA Billious	Box 368, Rt. 4	National Central	697 Sovilla Pd 44281
CALIFORNIA	PORTERVILLE	National Central	VOLINGSTOWN
COLORADO	DENVED	Burton Supply Co	1301 Logan Ave
Spitzer Industrial Products Co	6601 N	Burton Supply Co	Box 929
Sprizer maustrial Froducts Co	Washington St	OKLAHOMA Victory Motors, Inc.	MUSKOGEE
FLORIDA	JACKSONVILLE	Victory Motors, Inc.	605 S. Cherokee 74401
Radco Distributors	4909 Victor St.	OREGON	PORTLAND
COLORADO Spitzer Industrial Products Co FLORIDA Radco Distributors	Box 5459	OREGON Kenton Supply Co.	8216 N. Denver Ave 97217
	HIALPAH	PENNSYLVÁNÍA	HARRISBURG
Small Eng. Dist	7995 W. 26th Court ⊟3016	PENNSYLVANIA EECO Inc.	4021 N. 6th St 17110
GEORGIA	EAST POINT . 2834 Church St 30344		PHILADELPHIA
East Point Cycle & Key Inc	2834 Church St 30344	Thompson Rubber Co	5222-24 N. Fifth St 19120
ILLINOIS	LYONS 8615 Ogden Ave 30534		PITTSBURGH 11125 Frankstown Rd 15235
Keen Edge Co	8615 Ogden Ave 30534	Bluemont Co	DUNIVELLE AWNIEV
INDIANA	ELKHART 2101 Industrial Pkwy 16516	Frank Roberts & Sons	RD 2 15767
IOWA	DIPLOUE	Frank Roberts & Sons	SCRANTON
Power Lawn & Garden Equip	2551 J.F. Kennedy 32001	Scrapton Auto Ignition Co	SCRANTON 1133-35 Wyoming Ave. 18509
LOUISIANA	NEW ODI FANS	TENNESSEE	KNOXVILLE 2000 Western Ave 37921
Subren Engine Co	NEW ORLEANS830 Earhart Blvd70118	Master Repair Service	2000 Western Ave 37921
MARYLAND	TAKOMA PARK		MEMPHIS
Center Sunniv Co	TAKOMA PARK 6867 New Hampshire	American Sales & Service, Inc	3035-43 Bellbrook 38116°
MASSACHUSETTS Morton B. Collins Co	Ave20912	TEXAS	DALLAS . 423 E. Jefferson 7520
MASSACHUSETTS	SPRINGFIELD	Marr Brothers, Inc	423 E. Jefferson 75200
Morton B. Collins Co	300 Birnie Ave 01107		FORT WORTH
MICHIGAN	LANSING2500 S. Pennsylvania48910	Woodson Sales Corp	6733 Baker Blvd. Hwy. 10
Lorenz Service Co	2500 S. Pennsylvania . 48910		Hwy. 10
	MOUNT CLEMENS	B. Hand O. marks On	HOUSTON 2409 Commerce St 77003
Power Equipment Dist	340 Hubbard 46043	Bullard Supply Co	CAN ANTONIO
MINNESOTA	HOPKINS 420 Excelsior Ave. W. 55343	Engine House Inc	9610 Potto Lano
Hance Distributing Inc.	PILOYI	Engine House Inc	SAN ANTONIO 8610 Botts Lane P.O. Box 17867 78217
MISSISSIPPI	BILOXI 506 Caillavet St 39533	UTAH	BOUNTIFUL 485 N 500 W 84010
MICCOLIDI	KANGAGATIY	Powered Products	485 N 500 W 84010
Automotivo Equip Service	3117 Holmes St 64109	VIRGINIA	ASHLAND
Automotive Equip. Octatoo	ST. JOSEPH	VIRGINIA RBI Corp	101 Cedar Ridge Dr 23005
Boss-Frazer Supply Co	ST. JOSEPH 8th and Monterey 64503	WASHINGTON Equip. Northwest	SEATTLE
(1000 ()alex 5 app.) -	ST. LOUIS 2015 Lemay Ferry Rd. 63125	Equip. Northwest	1410 14th Ave98122
Henzler, Inc.	2015 Lemay Ferry Rd 63125	WISCONSIN Horst Dist. Inc.	CHILTON
NEW JERSEY	BELLMAWR	Horst Dist. Inc	444 N. Madison St 53014
NEW JERSEY Lawnmower Parts Inc.	717 Creek Rd 08030	NORTH CAROLINA Smith Hardware Co	GOLDSBORO
NEW MEXICO Spitzer Eng. & Parts Co	ALBUQUERQUE		
Spitzer Eng. & Parts Co	1023 Nira Ave. N.vv 87 103		GREENSBORO
NEW YORK	CARTHAGE West End Ave 13619	Dixie Sales Company	335 N. Green27402
Gamble Dist., Inc.	vvest End Ave 13019		

WARRANT' PARTS AND SERVICE POLICY

(0484)

The purpose of warranty is to protect the customer from defects in workmanship and materials, defects which are NOT detected at the time of manufacture. It does not provide for the unlimite 1 and unrestricted replacement of parts. Use and maintenance are the responsibility of the customer. The manufacturer cannot assun e responsibility for conditions over which it has no control. Simply put, if it's the manufacturer's fault, it's the manufacturer's responsibility.

CLAIMS AGAINST THE MANUFACTURER'S WARRANTY INCLUDES:

- 1. Replacement of Missing Parts on new equipment.
- 2. Replacement of Defective Parts within the warranty | eriod.
- 3. Repair of Defects within the warranty period.

All claims MUST be substantiated with the following information:

- 1. Model Number of unit involved.
- 2. Date unit was purchased or first put into service.
- 3. Date of failure.
- 4. Nature of failure.