


# OWNER'S GUIDE

OUTDOOR POWER EQUIPMENT  
for all seasons

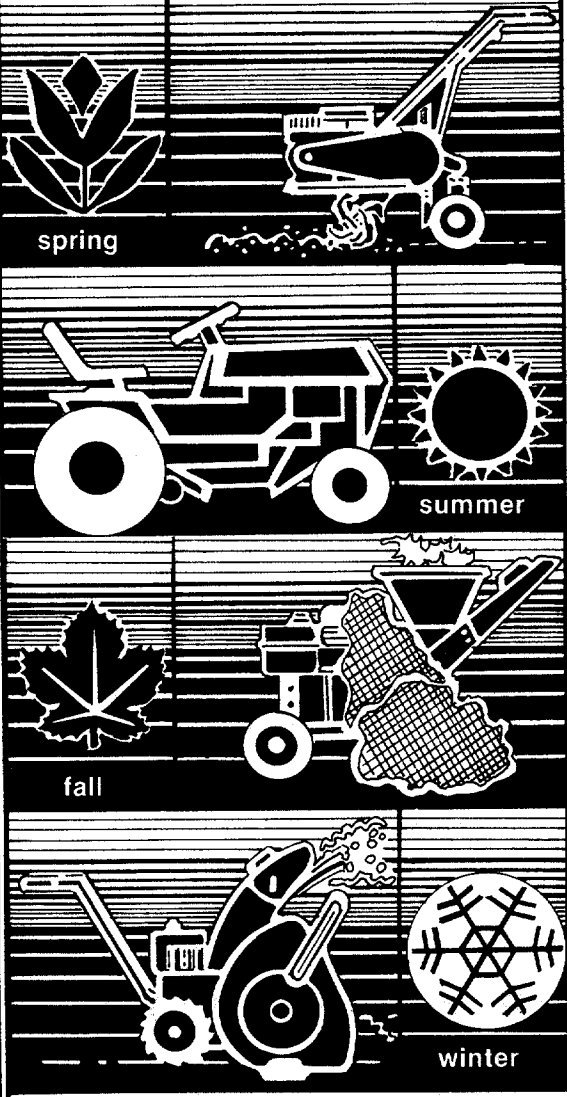

## 22" REAR DISCHARGE 3-SPEED ROTARY MOWER

### Model Number 125-365-000

195-019

**Important:**  
**Read Safety Rules and  
Instructions Carefully**

Thank you for purchasing  
an American-built product.

# INDEX

Safe Operation Practices .....	3	Maintenance .....	14
Assembly .....	4	Off-Season Storage .....	17
Controls .....	10	Trouble Shooting Chart .....	19
Operation .....	10	Illustrated Parts .....	20, 22
Adjustments .....	12	Repair Parts Lists .....	21, 23, 24
Lubrication .....	13	Parts Information .....	Back Cover



Instructions given with this symbol are for personal safety. Be sure to follow them.

## LIMITED WARRANTY

For one year from the date of original retail purchase, MTD PRODUCTS INC will either repair or replace, at its option, free of charge, F.O.B. factory or authorized service firm, any part or parts found to be defective in material or workmanship. Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. Transportation charges for any parts submitted for replacement under this warranty must be paid by the purchaser unless such return is requested by MTD PRODUCTS INC.

This warranty will not apply to any part which has become inoperative due to misuse, excessive use, accident, neglect, improper maintenance, alterations, or unless the unit has been operated and maintained in accordance with the instructions furnished. This warranty does not apply to the engine, motor, battery, battery charger or component parts thereof. Please refer to the applicable manufacturer's warranty on these items.

This warranty will not apply where the unit has been used commercially.

Warranty service is available through your local authorized service dealer or distributor. If you do not know the dealer or distributor in your area, please write to the Customer Service Department of MTD.

The return of a complete unit will not be accepted by the factory unless prior written permission has been extended by MTD.

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.



**WARNING**

This unit is equipped with an internal combustion engine and should not be used on or near any unimproved forest-covered, brush-covered or grass-covered land unless the engine's exhaust system is equipped with a spark arrester meeting applicable local or state laws (if any). If a spark arrester is used, it should be maintained in effective working order by the operator.

In the State of California the above is required by law (Section 4442 of the California Public Resources Code). Other states may have similar laws. Federal laws apply on federal lands. A spark arrester muffler is available at your nearest engine authorized service center.



**WARNING**

To reduce the potential for any injury, comply with the following safety instructions. Failure to comply with the instructions may result in personal injury.

## SAFE OPERATION PRACTICES FOR WALK-BEHIND MOWERS

### TRAINING

1. Read this owner's manual carefully in its entirety before attempting to assemble or operate this machine. Be completely familiar with the controls and the proper use of this machine before operating it. Keep this manual in a safe place for future and regular reference and for ordering replacement parts.
2. Your rotary mower is a precision piece of power equipment, not a plaything. Therefore, exercise extreme caution at all times.
3. Never allow children to operate a power mower. Only persons well acquainted with these rules of safe operation should be allowed to use your mower.
4. No one should operate this unit while intoxicated or while taking medication that impairs the senses or reactions.
5. Keep the area of operation clear of all persons, particularly small children and pets. Stop engine when they are in the vicinity of your mower. Although the area of operation should be completely cleared of foreign objects, an object may have been overlooked and could be accidentally thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.

### PREPARATION

1. Thoroughly inspect the area where the equipment is to be used. Remove all stones, sticks, wire, bones and other foreign objects which could be picked up and thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.
2. Do not operate equipment when barefoot or wearing open sandals. Always wear substantial footwear.
3. Do not wear loose fitting clothing that could get caught on the mower.
4. Check the fuel before starting the engine. Gasoline is an extremely flammable fuel. Do not fill the gasoline tank indoors, while the engine is running, or while the engine is still hot. Wipe off any spilled gasoline before starting the engine as it may cause a fire or explosion.
5. Disengage the self-propelled mechanism or drive clutch on units so equipped before starting the engine.
6. The blade control handle is a safety device. Never attempt to bypass its operation. Doing so makes the safety device inoperative and may result in personal injury through contact with the rotating blade. The blade control handle must operate easily in both directions.
7. Never attempt to make a wheel or cutting height adjustment while the engine is running.
8. Mow only in daylight or in good artificial light.
9. Never operate the equipment in wet grass. Always be sure of your footing. A slip and fall can cause

serious personal injury. Keep a firm hold on the handle and walk, never run.

### OPERATION

1. Do not change the engine governor settings or over-speed the engine. Excessive engine speeds are dangerous.
2. Do not put hands or feet near or under rotating parts. Keep clear of the discharge opening at all times as the rotating blade can cause injury.
3. Stop the blade when crossing gravel drives, walks or roads.
4. After striking a foreign object, stop the engine, remove the wire from the spark plug, and thoroughly inspect the mower for any damage. Repair the damage before restarting and operating the mower.
5. If the equipment should start to vibrate abnormally, stop the engine and check immediately for the cause. Vibration is generally a warning of trouble.
6. Shut the engine off and wait until the blade comes to a complete stop before removing the grass catcher or unclogging the chute. The cutting blade continues to rotate for a few seconds after the engine is shut off. Never place any part of the body in the blade area until you are sure the blade has stopped rotating.
7. Before cleaning, repairing or inspecting, make certain the blade and all moving parts have stopped. Disconnect the spark plug wire, and keep the wire away from the spark plug to prevent accidental starting.
8. Do not run the engine indoors.
9. Mow across the face of slopes, never up-and-down. Exercise extreme caution when changing direction on slopes. Do not mow excessively steep slopes. Always be sure of your footing. A slip and fall can cause serious personal injury.
10. Always disconnect electric mowers (line operated) before cleaning, repairing or adjusting.
11. Never operate mower without proper guards, plates or other safety protective devices in place.
12. **DO NOT OPERATE** this mower with the chute door open, unless the complete grass catcher is properly mounted on the mower.

### MAINTENANCE AND STORAGE

1. Check the blade and engine mounting bolts at frequent intervals for proper tightness.
2. Keep all nuts, bolts, and screws tight to be sure the equipment is in safe working condition.
3. Never store the equipment with gasoline in the tank inside of a building where fumes may reach an open flame or spark. Allow the engine to cool before storing in any enclosure.
4. To reduce fire hazard, keep the engine free of grass, leaves, or excessive grease.
5. Check the grass catcher bag frequently for wear or deterioration. For safety protection, replace only with new bag meeting original equipment specifications.

# SAFE OPERATION PRACTICES (Continued)

## BLADE BRAKE/CLUTCH MAINTENANCE

**NOTE:** Any required repair work on the blade brake/clutch should be performed by an authorized service dealer. If you cannot locate an authorized service dealer, contact the manufacturer as set forth on your copy of the Owner's Registration Card.

1. The blade brake/clutch hand control is a safety device. Never attempt to bypass its operation. Doing so makes the safety device inoperative and may result in personal injury through contact with the rotating blade. This hand control must operate freely in both directions.
2. Striking a solid object can cause damage to the blade brake/clutch or to the engine crankshaft. Extensive vibration of the mower during

operation is an indication of damage and the unit should be promptly inspected and repaired.

3. A leak in the lower engine crankshaft oil seal could expose the blade brake/clutch friction pads to excess oil resulting in blade or brake slippage, which could increase the stopping time of the blade. Oil collection on the floor beneath the mower during storage may be an indication of an oil seal leak. The unit should be checked by an authorized service dealer.
4. Periodically inspect the inner control cable in the area where it attaches to the hand control. If the cable becomes frayed, it could cause the blade brake/clutch to operate improperly. Also, be careful to avoid pinching the blade brake/clutch control cable when storing the handle.



### NOTE

This unit is shipped WITHOUT GASOLINE or OIL. After assembly, see separate engine manual for proper fuel and engine oil recommendations.

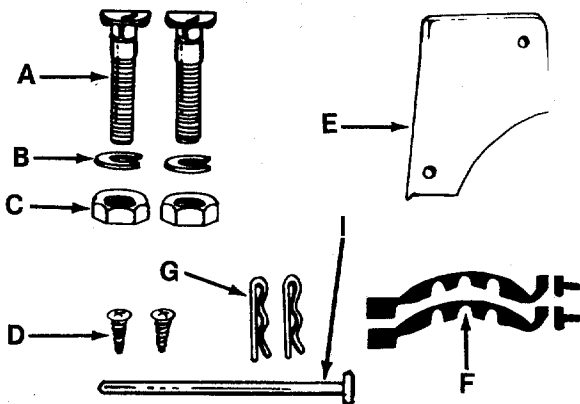


FIGURE 1.

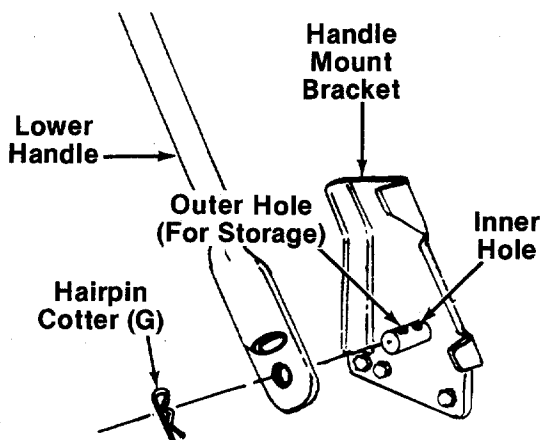


FIGURE 2.

## ASSEMBLY



### IMPORTANT

A 9 mm wrench or socket wrench is required to assemble the three speed shift cable.

#### Contents of Hardware Pack: (See figure 1)

- A (2) Curved Head Carriage Bolts 1.38" Long
- B (3) Lock Washers 5/16" I.D.
- C (3) Hex Nuts 5/16-18 Thread
- D (2) Phillips Head Screws
- E (1) Plastic Cap
- F (2) Cable Ties
- G (2) Hairpin Cotters
- H (2) Front Hub Caps (Optional—Not Shown)
- I (1) Pin 4 1/4" Long
- J (1) Plastic Plug (Not Shown)

1. Remove the lawn mower, loose parts, hardware pack and literature from the carton. Make certain all parts and literature have been removed before the carton is discarded.
2. Extend all control cables and place on the floor. Be careful not to bend or kink control cables.
3. Place lower handle in position over weld pins in handle mount brackets on deck. Make certain the instruction label on the lower handle can be read from the operating position. Secure by placing two hairpin cotters (G) in inner hole on weld pins. See figure 2.



### NOTE

There are two (2) holes in the handle mount brackets. Place hairpin cotter in the inner hole for operation. The outer hole is for storage. It may be necessary to bend the ends of the lower handle inward slightly to obtain a snug fit against the bracket.

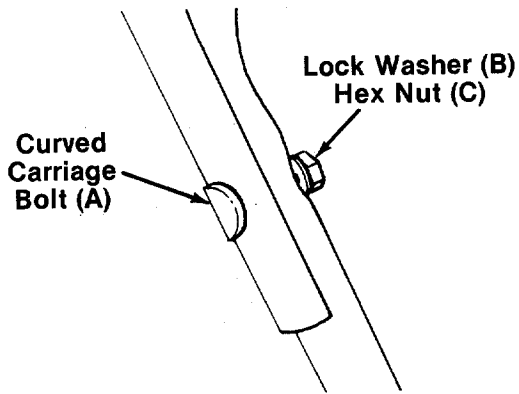


FIGURE 3.

- Place upper handle in position over lower handle. Control housing should be on the **left** side of the handle. Secure upper handle with two curved carriage bolts (A), lock washers (B) and hex nuts (C). See figure 3.

**NOTE**

Reference to left or right side of machine is determined from operator's position at the handle facing forward.

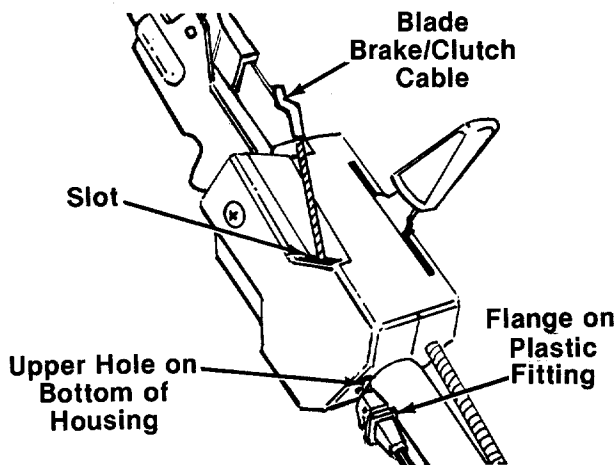


FIGURE 4.

- The blade brake/clutch cable is the cable which has a "Z" fitting on the loose end, and is attached to the blade brake/clutch underneath the deck.

Route the blade brake/clutch cable under the lower handle. Place end of cable into the upper hole on the bottom of the control housing, and through the slot on the side of the housing as shown. The angle of the flange on the plastic fitting must be positioned downward as shown in figure 4. Be careful not to bend or kink the cable.



**WARNING**

The cable must be assembled as shown for proper blade brake/clutch operation.

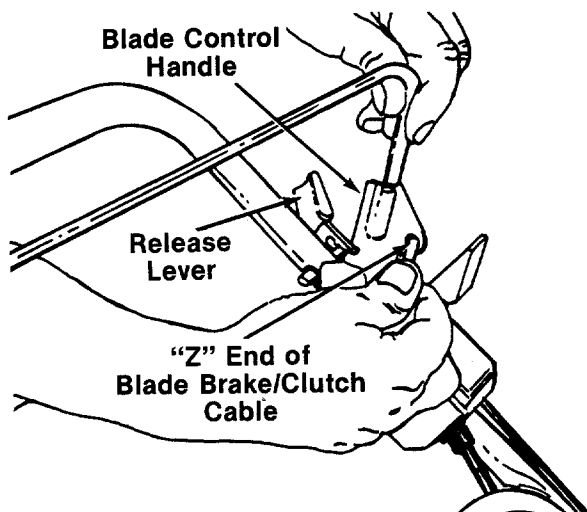


FIGURE 5.

- Snap the plastic fitting on the end of the cable into the control housing.
- Hook the "Z" end of the blade brake/clutch cable into the hole in the blade brake/clutch control handle. See figure 5. If additional slack is needed in order to hook the cable into the handle, proceed as follows.

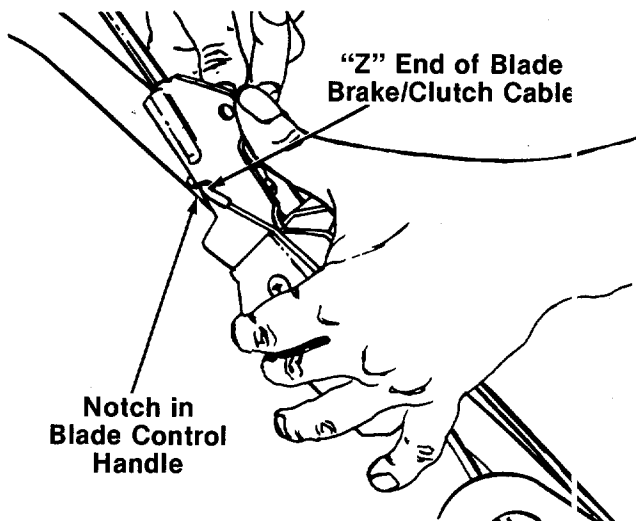


FIGURE 6.

- a. Hook the "Z" end of the cable into notch provided in the blade control handle. See figure 6.
- b. Push release lever (see figure 5), then squeeze blade control handle against upper handle.
- c. Release the blade control handle, unhook the cable from the notch and hook it into the hole in the blade control handle.

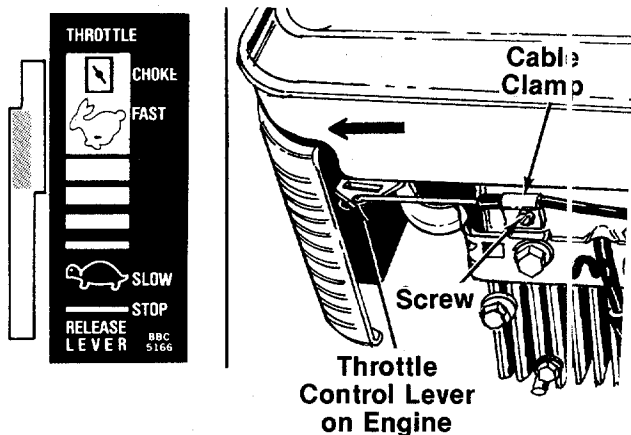


FIGURE 7.

8. Move throttle control lever on handle forward until it stops in "Fast" position. (**Do not** push all the way forward to "Choke" position.) See figure 7.
9. Slide the throttle control lever on the engine as far toward the outside of the engine as it will go **easily** as shown in figure 7. (**Do not** force it into the extreme outside position, which is the "Choke" position.)
10. The throttle control cable is attached to the upper handle. Hook the "Z" end of the throttle control cable into the hole in the control lever on the engine.
11. Loosen the screw on the cable clamp shown in figure 7. Slip the control casing under the clamp. With the throttle lever on the engine still in the "Fast" position, tighten the screw to secure the throttle control cable. Be certain the clamp is positioned so it holds the cable in a straight line, parallel to the engine shroud.
12. Loosen the screw on the clamp on the side of the engine. Secure the cable **away from the muffler**. Be careful not to bend or kink the cable. Tighten the screw.

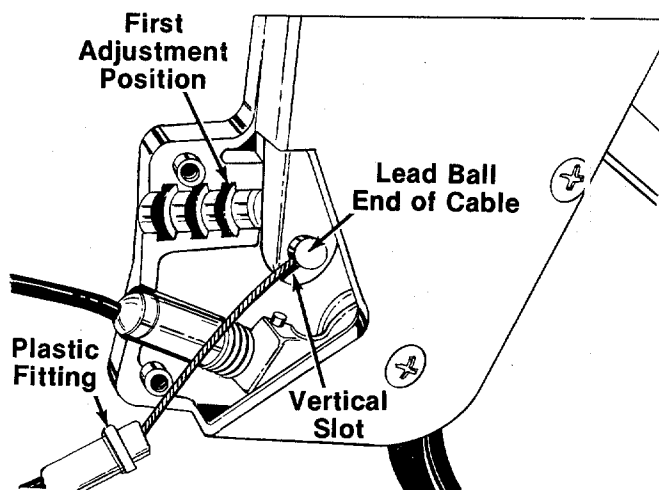


FIGURE 8.

13. The drive clutch control cable is attached to the deck. Attach the cable to the lever in the clutch control housing, located in the middle of the upper handle, as follows.
  - a. Place the lead ball end of the cable into the fitting provided in the end of the clutch control lever. Slip the braided wire into the vertical slot as shown in figure 8.

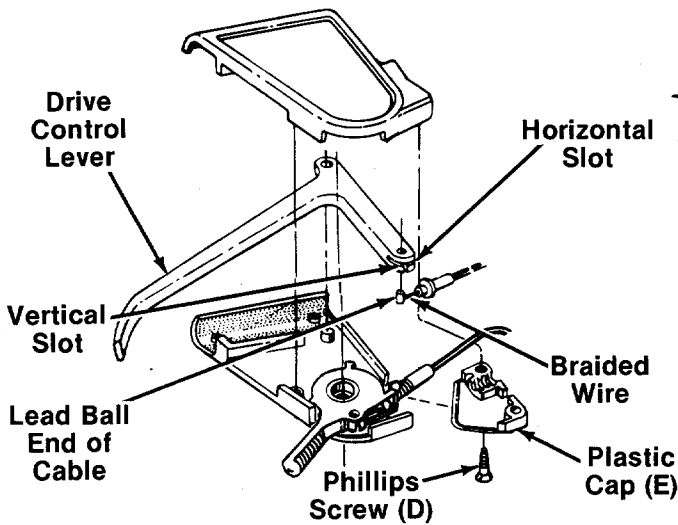


FIGURE 9.

- b. Slide the braided wire around in the horizontal slot. See figure 9.
- c. Place the plastic fitting on the control cable into the first adjustment position in the clutch control housing. See figure 8.
- d. Secure the plastic cap (E) to the clutch control housing using the two Phillips head screws (D). See figure 9.



**WARNING**

Drive clutch adjustment must be checked before the unit is operated, as described in the operation section.

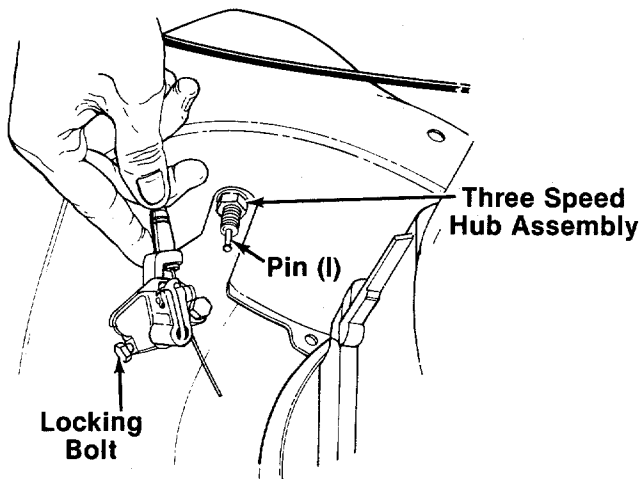


FIGURE 10.

- 14. The three speed shift cable is attached to the drive clutch control housing on the upper handle. Attach the shifting mechanism on the other end of the cable to the three speed hub assembly as follows.
  - a. Place the three speed shift lever in the third speed position (all the way down).
  - b. Insert pin (I) into hub assembly as shown in figure 10.
  - c. Loosen the locking bolt on the mechanism shown in figure 10 using a 9 mm wrench or socket.

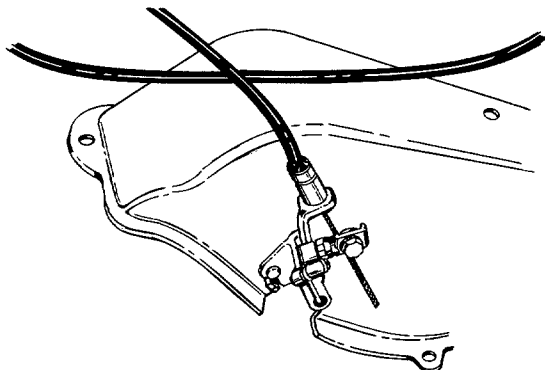


FIGURE 11.

- d. Push the mechanism on the end of the cable all the way onto the pin and hub assembly. Tighten the locking bolt while holding the mechanism firmly in place. See figure 11.

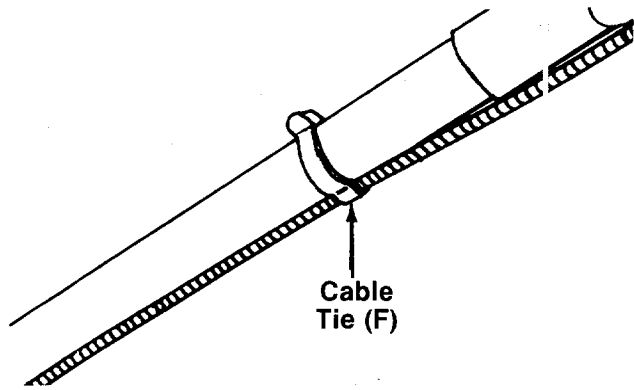


FIGURE 12.

- ← 15. Secure the control cables to handle with cable ties (F) provided. See figure 12.
- 16. Insert plastic plug (J) into hole in the top rear of the deck by slipping one end of plug into hole, then pressing down on the other end of plug.
- 17. Check **all** nuts and bolts for correct tightness.

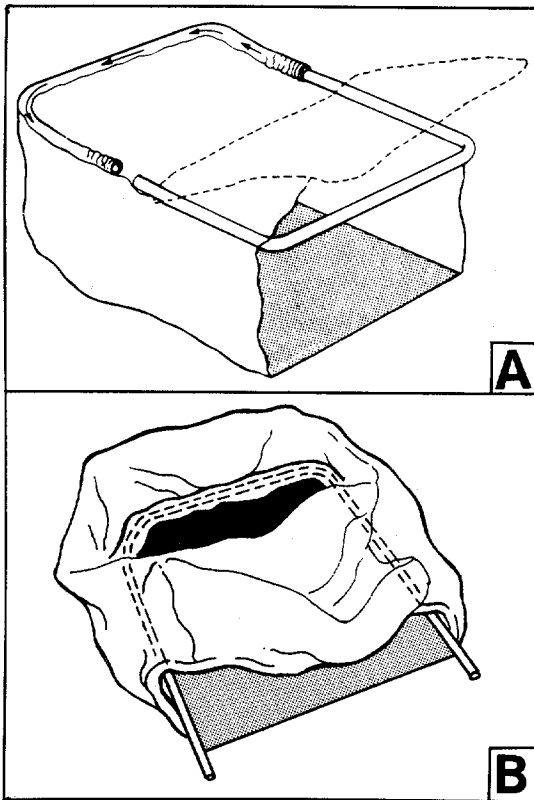


FIGURE 13—Bag with Flip Top Opening.

## Grass Catcher Assembly

There are two different types of grass bags, bags with and without flip top openings. Follow the instructions which pertain to your unit.

- ← 1. Grass Bags with Flip Top Opening:
  - a. Attach bag to rear frame by inserting one end of frame into pocket from inside bag. See figure 13A.
  - b. Thread all material on one side of frame before working it around the frame.
  - c. After threading, both ends of frame should be inside of bag. See figure 13B.

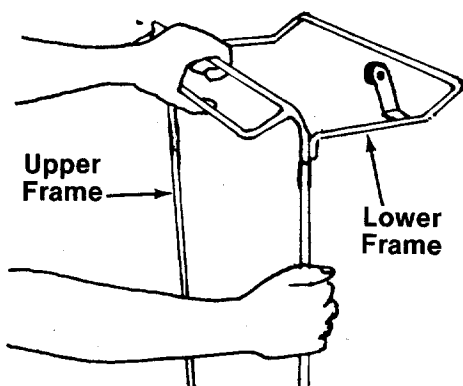


FIGURE 14.

- ← 2. Join the upper frame and lower frame assembly as shown in figure 14.



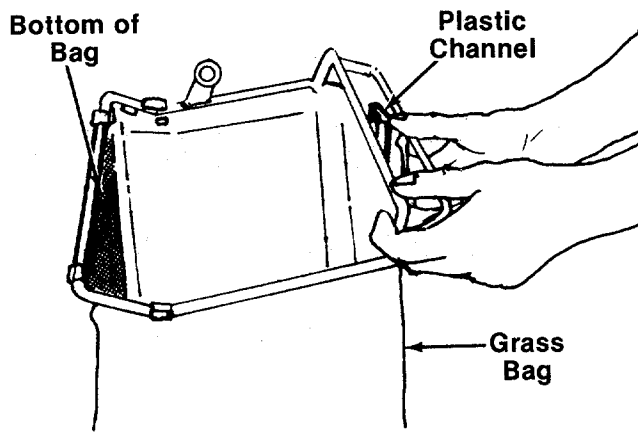


FIGURE 15.

3. Grass bags without Flip Top Opening: Place bag over frame (black plastic side is the bottom of bag). Upper frame goes to the top of bag.
4. Secure bag to frame by slipping plastic channels on bag over frame. See figure 15.
5. Grass Bags with Flip Top Opening: Close top of bag by stretching loose material over the end of the frame.



**WARNING**

Never operate the mower with the bag open.

## To Attach Bag To Mower



**WARNING**

**DO NOT** operate the mower with the chute door open unless the complete grass catcher is properly mounted on the mower.

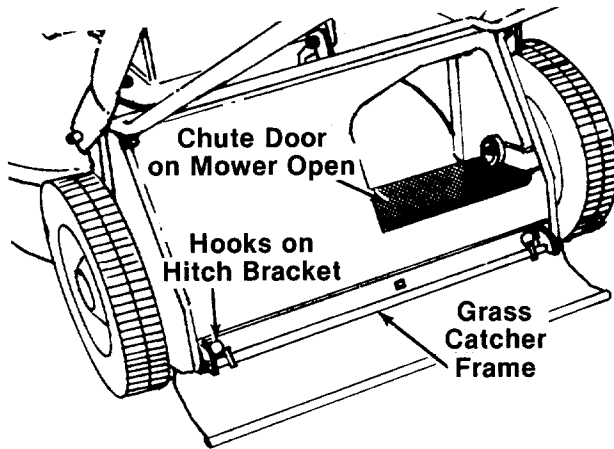


FIGURE 16.

1. Attach the grass catcher frame to grass catcher hitch bracket on rear of the mower by hooking grass catcher into hooks on grass catcher hitch bracket. See figure 16.
2. Lift the rear of grass catcher up. The roller on the grass catcher will push the chute door on the mower open. See figure 16.



**NOTE**

Figure 16 is shown with the chute door open for photo clarity only.

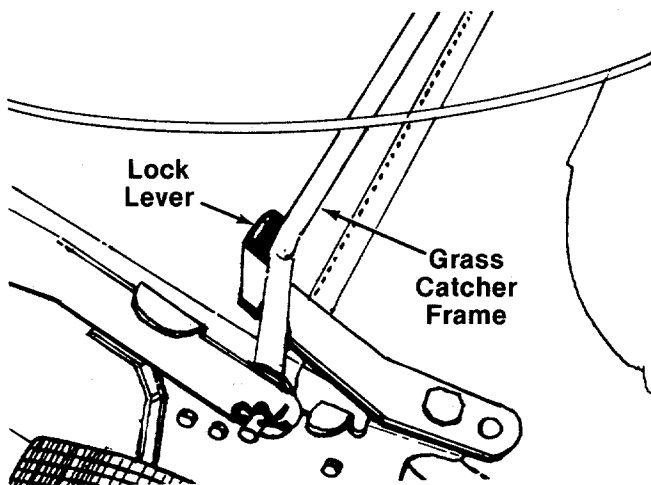


FIGURE 17.

The grass catcher frame will snap into place, secured by the lock lever. See figure 17.

To remove the grass catcher, unhook the lock lever and slip the grass catcher off the unit. See figure 17.

# CONTROLS

## THROTTLE CONTROL

The throttle is located on the left side of handle. It controls engine speed. See figure 18.

## DRIVE CLUTCH CONTROL

Squeezing the drive clutch control engages the drive mechanism to the rear wheels. Releasing the clutch control stops the rear wheels from driving. Release the drive clutch control to slow down when negotiating an obstacle, making a turn or stopping. See figure 18.

## BLADE BRAKE/CLUTCH CONTROL

### WARNING

THIS CONTROL MECHANISM IS A SAFETY DEVICE. NEVER ATTEMPT TO BYPASS ITS OPERATIONS

The blade brake/clutch control is located on the upper handle of the mower. The blade brake/clutch handle engages and disengages the blade.

To engage the blade, pull the side release lever away from the unit. See figure 18. Pull the blade brake/clutch control handle against the upper handle. Release side lever.

Release the blade brake/clutch control handle to stop the blade from turning.

## THREE SPEED SHIFT LEVER

The three speed shift lever is located on the drive clutch control housing on the upper handle. See figure 18. This lever is used to select the operating speed of the mower. Release the drive clutch control and stop the mower before changing speeds.

### IMPORTANT

Do not move the shift lever while the drive clutch control is engaged.

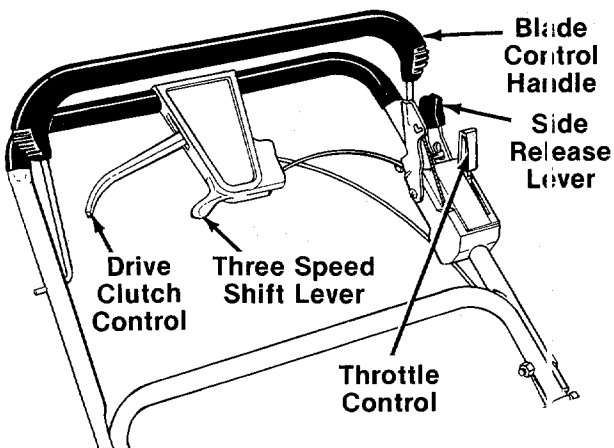


FIGURE 18.

# OPERATION

## Caution

Do Not Operate Mower Unless This Guard Or Entire Grasscatcher Is In Its Proper Place.

# DANGER

## KEEP HANDS and FEET AWAY



FIGURE 19.

Keep hands and feet away from the chute area on cutting deck. See figure 19.

### NOTE

For shipping purposes your mower is set with the wheels in a low cutting height position. For best results raise the cutting position until it is determined which height is best for your lawn. See cutting height adjustment section.

## BEFORE STARTING

1. Fill sump with oil as instructed in the separate engine manual packed with your unit.
2. Fill fuel tank, using clean, fresh, lead-free, low-lead or regular grade leaded gasoline. Fill tank completely!

DO NOT MIX OIL WITH GASOLINE.

3. Attach spark plug wire to spark plug.
4. Open fuel shut-off valve, located beneath the fuel tank. See figure 20.

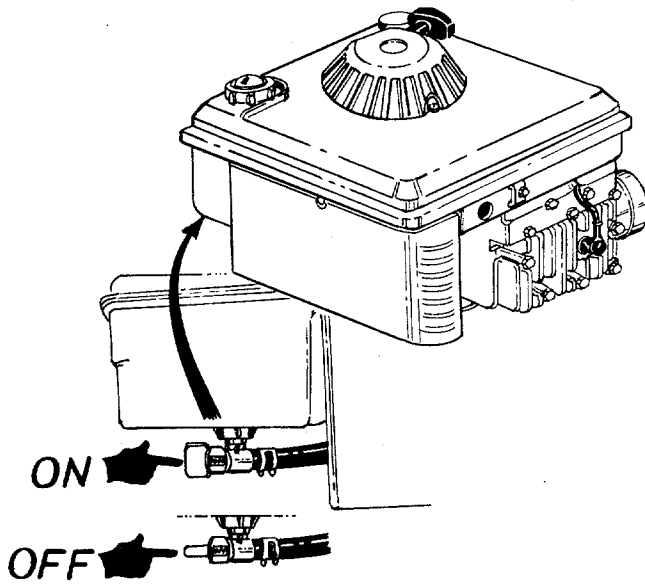


FIGURE 20.

- Before each use, check for proper drive clutch operation by performing the following before starting the engine:

With the drive clutch control released, push mower forward. It should move freely. **Pull mower backward. It should move freely.**

If it does not and the rear wheels tend to lock up, the clutch may not be releasing completely. Do not start the engine until corrections have been made. Check the control cable for severe bend, kinks and binding, or grass build-up in the pulley groove. Correct and adjust as required.

#### TO START ENGINE



When starting the unit for the first time, face the mower against a solid object such as a wall, fence, etc. Start the unit, and if it shows any signs of motion with the drive clutch control disengaged, shut the engine off immediately. Check the position of the drive clutch control cable. The plastic fitting must be assembled in the first adjustment position inside the housing, all the way to the right, as shown in figure 8.

- Move throttle control lever to "START" position.

- With the blade brake/clutch handle **released**, crank engine by pulling recoil starter with a quick firm pull. Do not pull out so far that rope stops with a jerk as this will cause rope failure. Do not allow rope and handle to snap back into place.
- After engine starts, move throttle control to desired engine speed.



Place the three speed shift lever in first speed position (all the way up) when operating the unit for the first time.

#### TO STOP ENGINE

- Move throttle control lever to "STOP" position.
- Disconnect spark plug wire from spark plug and ground against the engine to prevent accidental starting while equipment is unattended.

#### TO ENGAGE THE BLADE

- Start engine as instructed above. Allow the engine to warm up for **one minute** before attempting to engage the blade.
- To engage the blade, pull the side release lever away from the unit. Pull the blade brake/clutch control handle down against the upper handle. Release the side lever. See figure 18.



If a warm engine falters or stalls when attempting to engage the blade, refer to Carburetor Adjustment Section of this owner's manual.

- Release the blade brake/clutch control handle to stop the blade from turning.



**Always release the blade brake/clutch control handle before stopping the engine.** If the engine begins to stall, release the blade brake/clutch control handle immediately.

Should the engine stall with the blade brake/clutch control in the operating position (control handle **not** released), difficulty may be encountered in pulling the starter rope to restart the engine. Proceed as follows.

1. Disconnect the spark plug wire from the spark plug.
2. Move the throttle lever to STOP position.
3. Hold the blade brake/clutch control in the engaged position.
4. While holding the blade brake/clutch control handle in this position, pull the starter rope.
5. As the starter rope is being pulled, release the blade brake/clutch control handle.

The starter rope should now operate correctly. Reconnect the spark plug wire for normal operation.

## ▶ IMPORTANT

If you strike a foreign object, stop the engine. Remove wire from spark plug, thoroughly inspect the mower for any damage, and repair the damage before restarting and operating the mower.

Striking a solid object can cause damage to the blade brake/clutch or to the engine crankshaft. Extensive vibration of the mower during operation is an indication of damage. The unit should be promptly inspected and repaired.

## USING YOUR ROTARY MOWER



**DO NOT** operate the mower with the chute door open unless the complete grass catcher is properly mounted on the mower.

Be sure that lawn is clear of stones, sticks, wire, or other objects which could damage lawn mower or engine. Such objects could be accidentally thrown by the mower in any direction and cause serious personal injury to the operator and others.

Operate a new engine at intermediate speeds and light load for the first few hours as you would a new automotive engine.

For the best results, do not cut wet grass because it tends to stick to the underside of the mower, preventing proper discharge of grass clippings, and could cause you to slip and fall. New grass, thick grass or wet grass may require a narrower cut. Blade speed should be adjusted to the condition of the lawn.

For best results, cut off one-third or less of the total length of the grass. Lawn should be cut in the fall as long as there is growth.

This mower is designed to be operated at full throttle to give you the best cut and do the most effective job of bagging the cut grass.

## ADJUSTMENTS



Do not at any time make any adjustment to lawn mower without first stopping engine and disconnecting spark plug wire.

### DRIVE CLUTCH CONTROL ADJUSTMENT

If the unit does not self-propel with the drive clutch control engaged, remove the plastic cap from beneath the drive clutch control housing. Move the plastic fitting on the control cable to the next adjustment position on the left. Reassemble the plastic cap and retest. See figure 21.

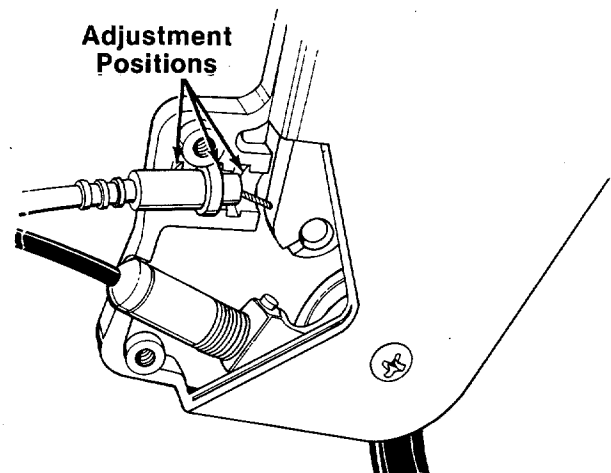


FIGURE 21.

## CUTTING HEIGHT ADJUSTMENT

An adjusting plate and thumb lever at each wheel position provides cutting height adjustment. Each adjusting plate has nine height positions. Height of cut will be changed when the thumb lever is moved from one hole to another. Simply depress the lever towards wheel and move wheel and lever assembly to desired position. See figure 22.

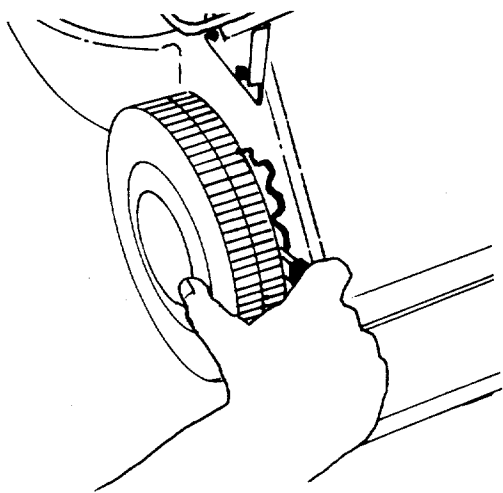


FIGURE 22.

Cutting height will be raised as front levers are moved to the front, and rear levers are lowered. Cutting height will be lowered as front levers are moved to the rear, and rear levers are raised. All wheels must be placed in the same relative position.

For rough or uneven lawns, move the wheels to a position which will give a higher cutting height.

## THROTTLE

The throttle control wire assembly can be adjusted if necessary. Refer to steps 8 through 12 of Assembly Instructions.

## CARBURETOR ADJUSTMENTS



If any adjustments are made to the engine while the engine is running (e.g. carburetor), disengage all clutches and blades. Keep clear of all moving parts. Be careful of heated surfaces and muffler.

Minor carburetor adjustments may be required to compensate for differences in fuel, temperature, altitude and load. Refer to the separate engine manual packed with your mower.



If a warm engine falters or stalls when attempting to engage the blade, the carburetor mixture should be adjusted 1/8 turn richer (counter-clockwise). See figure 23.

The carburetor should be adjusted with the air cleaner in place and the blade control handle in the blade disengaged position.

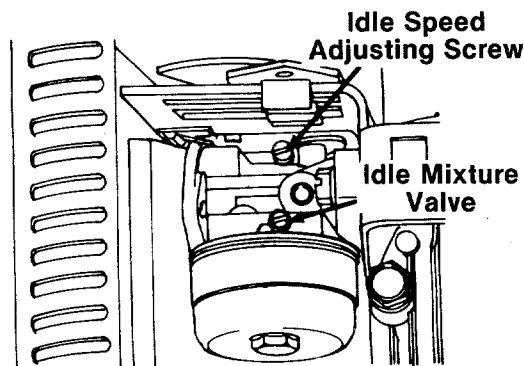


FIGURE 23.

## LUBRICATION



Always stop engine and disconnect spark plug wire before cleaning, lubricating or doing any kind of work on lawn mower.

**Blade Brake/Clutch**—Lubricate the pivot points on the blade brake/clutch handle and the cable at least once a season with light oil. The control must operate freely in both directions.

**Discharge Chute Door Mechanism**—The torsion spring and pivot point should be lubricated periodically with light oil to prevent any rust or binding. Door must work freely.

**Wheels**—Mower may be provided with ball bearing wheels. Lubricate at least once a season with light oil. Also, if the wheels are removed for any reason, lubricate the surface of the axle bolt and the inner surface of the wheel with light oil. A 4 oz. plastic bottle of light oil lubricant is available. Order part number 737-0170. Engine oil may also be used.

**Engine**—Follow engine manual for lubrication instructions.

**Throttle**—Periodically lubricate throttle control lever and throttle wire assembly with a few drops of light oil for ease of operation.

**Chain**—Periodically lubricate the chain with appropriate chain lubricant. A stiff or rusted chain can be restored by removing the master link, soaking the chain in kerosene or a solvent, letting it air dry and wiping the chain with a rag saturated with lubricant.

If the rotary mower is operated in a sandy area, the chain should not be lubricated with oil. Excessive oil on a chain will collect dirt and cause excessive wear on the chain and sprockets.

When sharpening the blade, follow the original angle of grind as a guide. It is **extremely important** that each cutting edge receives an equal amount of grinding to prevent an unbalanced blade. An unbalanced blade will cause excessive vibration when rotating at high speeds, may cause damage to the mower and could break, causing personal injury.

The blade can be tested for balance by balancing it on a round shaft screwdriver. Remove metal from the heavy side until it balances evenly.

When replacing the blade, be sure to install the blade with the side of the blade marked "Bottom" (or with part number) facing the ground when the mower is in the operating position.

### Blade Mounting Torque

Make certain that the center bolt which secures the blade brake/clutch and the two hex nuts which secure the blade are tightened to between 350 inch pounds (minimum) and 600 inch pounds (maximum).

To insure safe operation of your unit, ALL nuts and bolts must be checked periodically for correct tightness.

### DECK

The underside of mower deck should be cleaned after each period of use as grass clippings, leaves, dirt and other matter will accumulate. This accumulation of grass clippings, etc., is undesirable as it will invite rust and corrosion and may cause an uneven discharge of grass clippings at the next cutting.

The deck may be cleaned by tilting the mower forward or on its side and scraping clean with a suitable tool or by washing with a stream of water from a garden hose.

## MAINTENANCE



### WARNING

Be sure to disconnect and ground the spark plug wire before performing any repairs or maintenance.



### NOTE

When tipping the unit, empty the fuel tank and keep engine spark plug side up.

### CUTTING BLADE

To remove the cutting blade for sharpening or replacement, remove the two hex nuts and lock washers which hold the blade to the blade brake/clutch. See figure 24.

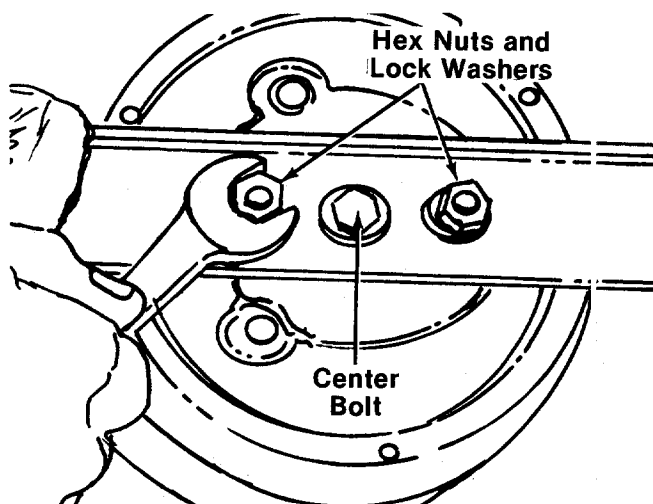


FIGURE 24.



### NOTE

Do not direct the stream of water at a hot engine as damage to the engine may result.

### ENGINE OIL

Check oil level before starting and after every 5 hours of operation. ADD oil as necessary to keep level to full mark on dipstick. Before removing dipstick, clean area around dipstick to prevent dirt from entering oil fill opening. Engine should be in a level position when checking oil.

Change oil after first 5 hours of operation. Thereafter change every 25 hours. Change oil while engine is warm. Oil may be drained thru oil fill opening by tipping the unit on its side. Oil capacity 1 1/4 pints.

## AIR CLEANER

Service air cleaner every 25 hours under normal conditions. Clean every few hours under extremely dusty conditions. Poor engine performance and flooding usually indicates that the air cleaner should be serviced.

To service air cleaner, refer to the separate engine manual packed with your mower.

## SPARK PLUG

The spark plug should be cleaned and the gap reset once a season. Spark plug replacement is recommended at the start of each mowing season; check engine manual for correct plug type and gap specifications.

## BELT REMOVAL AND REPLACEMENT

1. Disconnect the spark plug wire and ground it.
2. Drain the fuel tank or place a piece of plastic film beneath the cap to prevent gasoline leakage.
3. Remove the mechanism for the three speed shift cable from the three speed hub. Refer to Assembly Instructions.
4. Remove the 15 mm nut which holds the three speed hub to the belt guard. See figure 25.
5. Remove the three screws which hold the belt guard (and idler assembly). See figure 25.

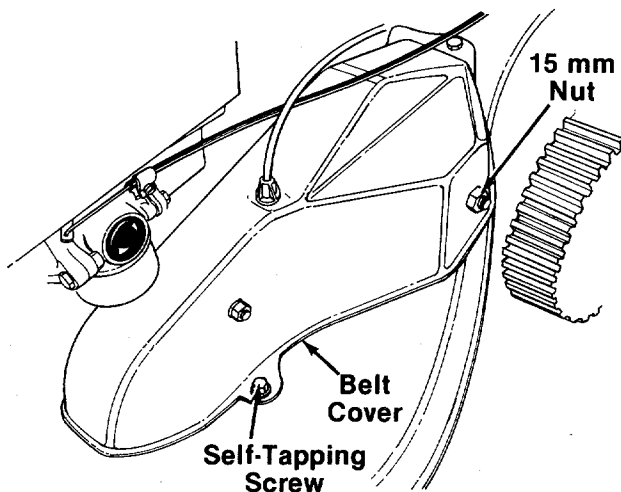


FIGURE 25.

6. Remove the belt from the idler as you lift off the belt guard.
7. Slide the belt off the pulley as shown in figure 26.
8. Loosen the nut on the inside of the three speed hub. See figure 26.

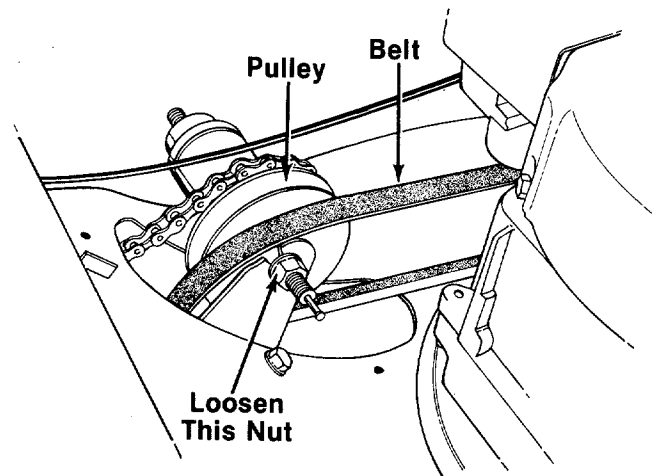


FIGURE 26.

9. Lift the three speed hub out of the three speed hub bracket. See figure 27.



### NOTE

When reassembling the three speed hub, be certain the washer is between the hub bracket and the pulley.

10. Remove the belt from the pulley and the engine pulley.

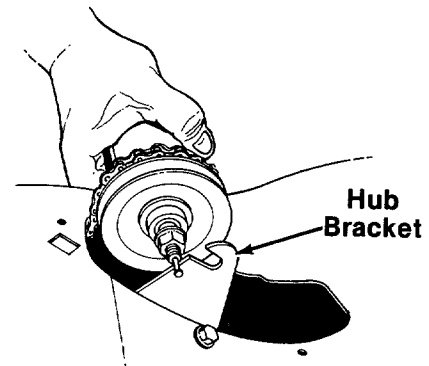


FIGURE 27.

11. Reassemble in reverse order with the new belt, making certain the idler pulley is under the belt. See figure 28.

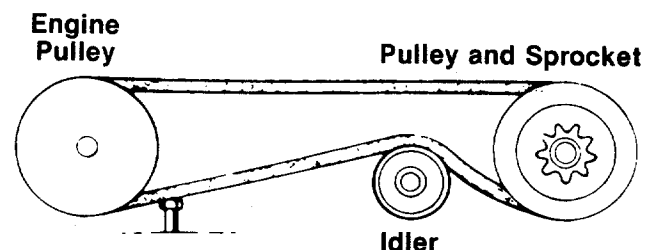


FIGURE 28.

## BLADE BRAKE/CLUTCH

This unit is equipped with a blade brake/clutch. If for some reason the blade brake/clutch becomes inoperative, it is suggested that all repair work on the blade brake/clutch should be performed by an authorized service dealer. The unit should be inspected by an authorized service dealer if any of the following conditions are noticed.

1. Frayed clutch control cable.
2. Leaking oil seal (oil collection on the floor during mower storage).
3. Extensive vibration of the unit.

### Blade Brake/Clutch Removal

1. Disconnect the spark plug wire and ground it against the engine block.
2. Empty fuel tank and drain oil from crankcase.
3. Remove the cable ties which secure control cables to the handle.
4. Disconnect the "Z" fitting on the blade brake/clutch cable from the clutch control handle.
5. Remove one truss machine screw on the inside of the control housing as shown in figure 29.
6. Loosen the truss machine screw on the outside of the control housing until the two halves of control housing can be separated enough for the control cable to be freed. Slide the blade brake/clutch cable out of the control housing.
7. Retighten the truss machine screws on the control housing.

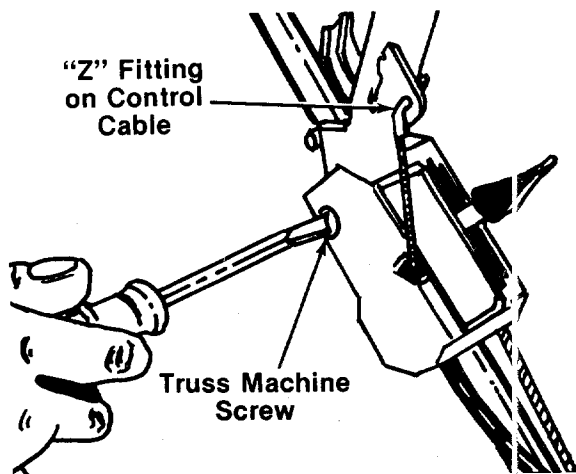


FIGURE 29.

8. Disconnect the throttle control cable from the engine by loosening screw on engine and disconnecting the "Z" fitting. Refer to figure 7.
9. Tip the mower on its side. Remove the blade by removing two hex nuts and lock washers. Refer to figure 24.

### NOTE

When reassembling, tighten hex nuts to between 350 and 600 in. lbs.

10. Remove the center bolt as follows.
  - a. Insert a screwdriver into the slot provided in the blade brake/clutch housing where the control cable enters housing. See figure 30.
  - b. Place a 9/16" wrench on the center bolt. Turn the wrench slowly until the screwdriver catches in a groove provided inside the clutch. The screwdriver will now keep the clutch from turning, and the center bolt, and two Belleville washers may be removed.

### IMPORTANT

Upon reassembly, be certain to tighten center bolt to between 350 and 600 in. lbs.

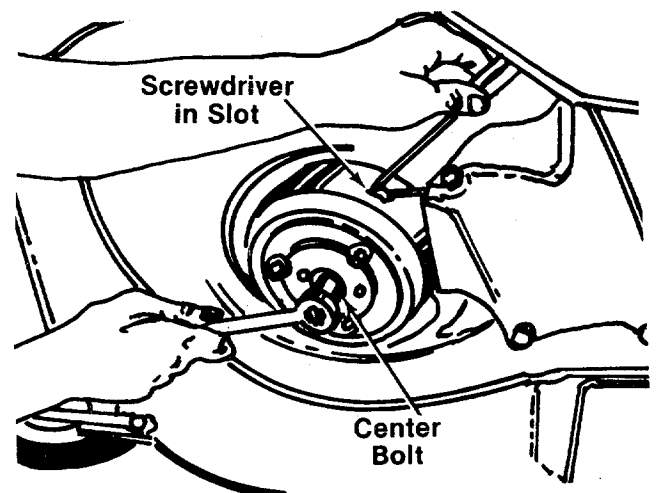
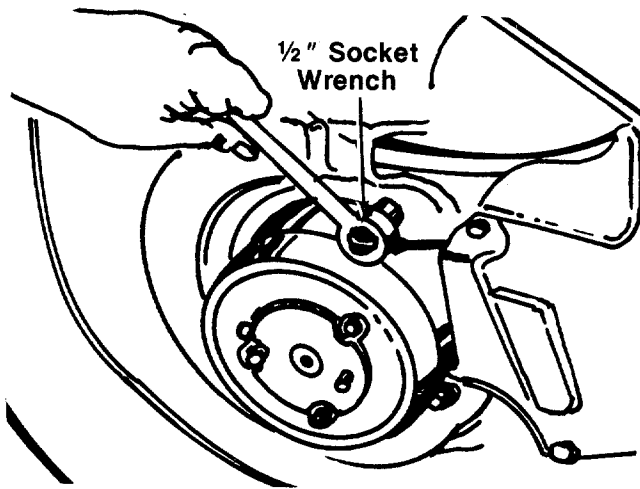


FIGURE 30.

11. Support the engine with one hand. Remove the three self-tapping screws which secure the deck and blade brake/clutch to the engine. A 1/2" socket wrench is required. See figure 31.





**FIGURE 31.**

12. Slide the blade brake/clutch cable through the hole in the deck as you lift off the engine and blade brake/clutch. Be careful not to kink control cable.
13. Remove blade brake/clutch from engine crankshaft.

#### **Blade Brake/Clutch Installation**

1. Place the new blade brake/clutch on engine crankshaft. Line up holes on blade brake/clutch with mounting holes on engine.
2. Place the two Belleville washers onto crankshaft. Cupped side of washers must be against the blade brake/clutch. Secure with hex bolt finger tight only.
3. Place cable through engine mounting hole on deck.
4. Reverse steps 1 through 12 of preceding section for reassembly.

## **OFF-SEASON STORAGE**

The following steps should be taken to prepare lawn mower for storage.

1. Clean and lubricate mower thoroughly as described in the lubrication instructions.
2. Refer to engine manual for correct engine storage instructions.
3. Coat mower's cutting blade with chassis grease to prevent rusting.
4. Store mower in a dry, clean area.

### **NOTE**

When storing any type of power equipment in an unventilated or metal storage shed, care should be taken to rustproof the equipment. Using a light oil or silicone, coat the equipment, especially the bearings and cables.

## **HANDLE STORAGE**

The handle can be stored in an upright position to take less space. Move hairpin cotter to outer hole on weld pins (see figure 2). Grasp the lower handle at the bottom and pull apart slightly. Tip the handle forward. It will lock in this position. Reverse this procedure to place the handle in the operating position.

### **NOTE**

Be careful not to kink or pinch blade brake/clutch cable when storing the handle.

 **NOTE**

The use of any accessory on this Rotary Mower other than those manufactured by the mower manufacturer is **not** recommended.

GRASS CATCHER Model 028 is available as replacement equipment for the mower shown in this manual.




1. DO NOT operate the mower with the chute door open unless the complete grass catcher is properly mounted on the mower.
2. DO NOT operate the mower without the protective shield on the rear of the deck in place.

 **NOTE**

Under normal usage bag material is subject to wear and should be checked periodically. Be sure any replacement bag complies with the mower manufacturer's recommendations.

For replacement bags, use only factory authorized replacement bag No. 764-0171 (without Flip Top) or 764-0170 (with Flip Top).

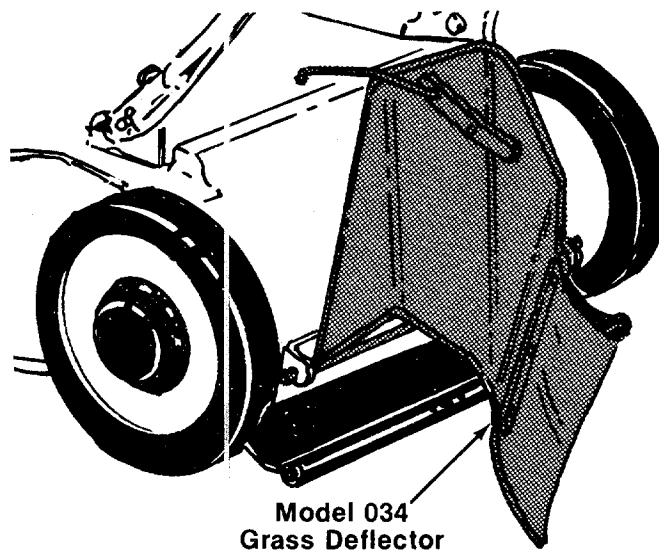


Grass Deflector model 195-034-000 is available as optional equipment.

## Trouble Shooting Chart

Problem	Cause	Remedy
<b>1</b> Engine fails to start	<b>A</b> Check fuel tank for gas <b>B</b> Fuel shut-off valve closed <b>C</b> Spark plug lead wire disconnected <b>D</b> Throttle control lever not in the starting position <b>E</b> Faulty spark plug  <b>F</b> Carburetor improperly adjusted, engine flooded  <b>G</b> Old stale gasoline	<b>A</b> Fill tank if empty. <b>B</b> Open fuel shut-off valve. <b>C</b> Connect lead wire.  <b>D</b> Move throttle lever to start position. <b>E</b> Spark should jump gap between control electrode and side electrode. If spark does not jump, replace the spark plug. <b>F</b> Remove spark plug, dry the plug, crank engine with plug removed, and throttle in off position. Replace spark plug and lead wire and resume starting procedures. <b>G</b> Drain and refill with fresh gasoline.
<b>2</b> Hard starting or loss of power	<b>A</b> Spark plug wire loose <b>B</b> Carburetor improperly adjusted <b>C</b> Dirty air cleaner	<b>A</b> Connect and tighten spark plug wire. <b>B</b> Adjust carburetor. See separate engine manual. <b>C</b> Clean air cleaner as described in separate engine manual.
<b>3</b> Operation erratic	<b>A</b> Dirt in gas tank <b>B</b> Dirty air cleaner <b>C</b> Water in fuel supply <b>D</b> Vent in gas cap plugged <b>E</b> Carburetor improperly adjusted	<b>A</b> Remove the dirt and fill tank with fresh gas. <b>B</b> Clean air cleaner as described in separate engine manual. <b>C</b> Drain contaminated fuel and fill tank with fresh gas. <b>D</b> Clear vent or replace gas cap. <b>E</b> Adjust carburetor. See separate engine manual.
<b>4</b> Occasional skip (hesitates) at high speed	<b>A</b> Carburetor idle speed too slow <b>B</b> Spark plug gap too close <b>C</b> Carburetor idle mixture adjustment improperly set	<b>A</b> Adjust carburetor. See separate engine manual. <b>B</b> Adjust to .030". <b>C</b> Adjust carburetor. See separate engine manual.
<b>5</b> Idles poorly	<b>A</b> Spark plug fouled, faulty, or gap too wide <b>B</b> Carburetor improperly adjusted <b>C</b> Dirty air cleaner	<b>A</b> Reset gap to .030" or replace spark plug. <b>B</b> Adjust carburetor. See separate engine manual. <b>C</b> Clean air cleaner as described in separate engine manual.
<b>6</b> Engine overheats	<b>A</b> Carburetor not adjusted properly <b>B</b> Air flow restricted  <b>C</b> Engine oil level low	<b>A</b> Adjust carburetor. See separate engine manual. <b>B</b> Remove blower housing and clean as described in separate engine manual. <b>C</b> Fill crankcase with the proper oil.
<b>7</b> Excessive vibration	<b>A</b> Cutting blade loose or unbalanced <b>B</b> Bent blade	<b>A</b> Tighten blade. Balance blade. <b>B</b> Replace blade.

**Note:** For repairs beyond the minor adjustments listed above, contact your local service center.

# Model 365

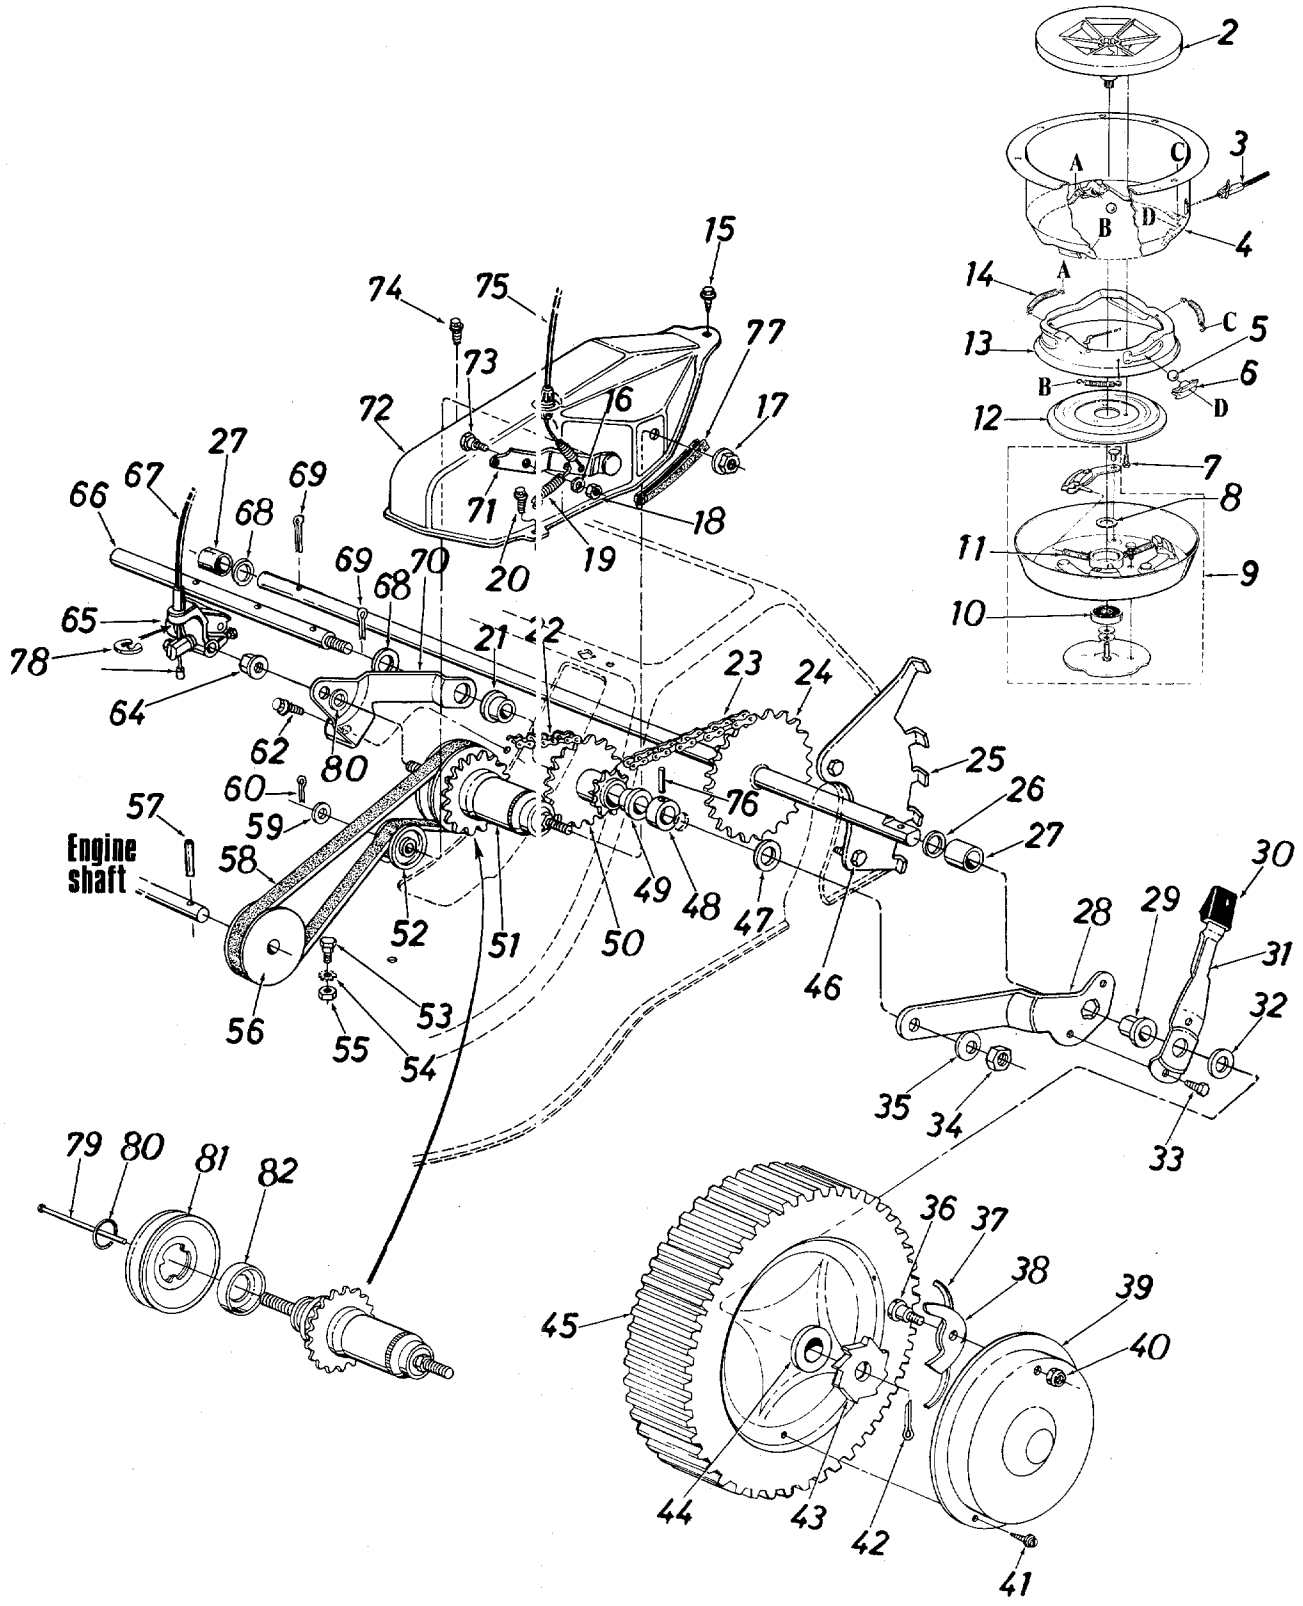

# Model 365

## PARTS LIST FOR MODEL 365 ROTARY MOWER



REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART	REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART
1	717-0485		Blade/Brake Clutch Ass'y.		41	710-0748		Pan Hd. Tap Scr. #12 x .50" Lg.*	
2	719-0256		Fan Adapter		42	714-0115		Cotter Pin 1/8" Dia. x 1.00" Lg.*	
3	746-0400		BBC-Clutch Cable x 46" Lg.		43	748-0187		Ratchet Wheel 1.62" O.D.	
4	14307		Clutch Housing		44	741-0180		FI-Ball Brg. 1/2" I.D.	
5	741-0326		Steel Ball .500" Dia.		45	734-1026		Wheel Ass'y. Comp. 8 x 1.75	
6	731-0520		Ball Block		46	710-0892		Hex L-Wash. Hd. AB-Tap Scr. 1/4 x .62" Lg.	
7	710-0875		Hex Wash. TT-Tap Cl-Scr. 1/4-20 x .75" Lg.		47	736-0219		Bell-Wash. .400" I.D. x 1.13" O.D.	
8	736-0333		FI-Wash. .690" I.D. x 1.060" O.D.		48	750-0387		Spacer .505" I.D. x .88" O.D.	
9	14300		Clutch Blade Housing Ass'y.		49	741-0248		Flg. Brg. .506" I.D. Plastic	
10	741-0124		Ball Brg. .669" I.D. x 1.574" O.D.		50	713-0359		9 and 21 Tooth Sprocket Ass'y.	N
11	732-0396		Compression Spring .32" O.D. x 2.00" Lg.		51	717-0825		Shimano 3-Sp. Hub w/18 Tooth Sprocket	N
12	14304		Clutching Cone		52	756-0360		FI-Idler Plastic 1.62" Dia.	
13	14305		Brake Cup Cone		53	738-0140		Shld. Bolt .437" Dia. x .180	
14	732-0397		Extension Spring .35" O.D. x 1.75" Lg.		54	736-0119		L-Wash. 5/16" I.D.*	
15	710-0456		Hex Drilling Scr. #10 x .50" Lg.		55	712-0267		Hex Nut 5/16-18 Thd.*	
16	736-0329		L-Wash. 1/4" I.D.*		56	756-0462		1/2" "V"-Engine Pulley .50" I.D. x 2.80" O.D.	
17	712-0340		Hex Nut 3/8-24 Thd. (Special)	N	57	715-0144		Spring Pin Spir. 3/16" Dia. x 1.50" Lg.	
18	712-0287		Hex Nut 1/4-20 Thd.*		58	754-0292		"V"-Belt 1/2" x 26.0" Lg.	N
19	732-0357		Extension Spring .33" O.D. x 1.12" Lg.		59	736-0160		FI-Wash. .531" I.D. x .930" O.D.	
20	710-0599		Hex Wash. S-Tap Scr. 1/4-20 x .50" Lg.		60	714-0115		Cotter Pin 1/8" Dia. x 1.00" Lg.*	
21	741-0248		Flg. Brg. .506" I.D.—Plastic		62	710-0726		Hex Wash. Hd. Tap Scr. 5/16-18 x .75" Lg.	
22	713-0361		#48 Chain 1/2" Pitch x 38 Links (Endless)		63	736-0226		FI-Wash. .469" I.D. x .88" O.D.	
23	713-0256		#48 Chain 1/2" Pitch x 32 Links (Endless)		64	712-0340		Hex Nut 3/8-24 Thd. (Special)	N
24	13414		Rear Shaft Ass'y. 20.75" Lg.		65	717-0824		Shimano 3-Sp. Shift Bell Crank	N
25	16097		Index Plate Rear—L.H.	N	66	738-0471		Pulley Shaft 10" Lg.	N
	16098		Index Plate Rear—R.H. (Not Shown)	N	67	717-0823		Shimano 3-Sp. Solid Shift Cable	N
26	736-0326		FI-Wash. .510" I.D. x 1.0" O.D.		68	736-0160		FI-Wash. .531" I.D. x .930" O.D.	
27	750-0190		Spacer .740" I.D. x .83" O.D.		69	714-0111		Cotter Pin 3/32" Dia. x 1.00" Lg.*	
28	16099		Pivot Brkt.—L.H.	N	70	16304		3-Sp. Hub Bracket	N
	16100		Pivot Brkt.—R.H. (Not Shown)	N	71	13415		Idler Bracket Ass'y.	N
29	741-0324		Hex Flange Brg. .506" I.D.—Plastic		72	16305		3-Sp. Belt Cover	N
30	720-0190		Spring Lever Knob		73	738-0255		Shld. Bolt .375" Dia. x .181	
31	732-0467		Spring Lever	N	74	710-0642		Hex TT-Tap Scr. 1/4-20 x .75" Lg.	
32	736-0160		FI-Wash. .531" I.D. x .930" O.D.		75	746-0466		S.P. Cable—53" Lg.—Blue	N
33	710-0352		Hex B-Tap Scr. 1/4 x .38" Lg.		76	715-0120		Spring Pin Spir. 3/16" Dia. x 1.0" Lg.	
34	712-0342		Hex Jam Nut 3/8-16 Thd.		77	731-0511		Trim Strip	
35	736-0105		Bell-Wash. .400" I.D. x .88" O.D.		78	717-0832		Snap Ring (Special)	N
					79	717-0830		Shifting Pin (Special)	N
36	738-0137		Shld. Bolt .342" Dia. x .268		80	717-0826		Pulley Snap Ring (Special)	N
37	10622		Spring—Nylon		81	756-0463		1/2" V-Pulley 1.375" I.D. x 3.25" O.D.	N
38	748-0188		Pawl		82	717-0831		Shimano 3-Sp. Dust Cover	N
39	10647		Hub Cap						
40	712-0324		Hex Ins. L-Nut 1/4-20 Thd.						

# Model 365

Meets CPSC Blade Safety Requirements

Lot/Model

Mfg. Date

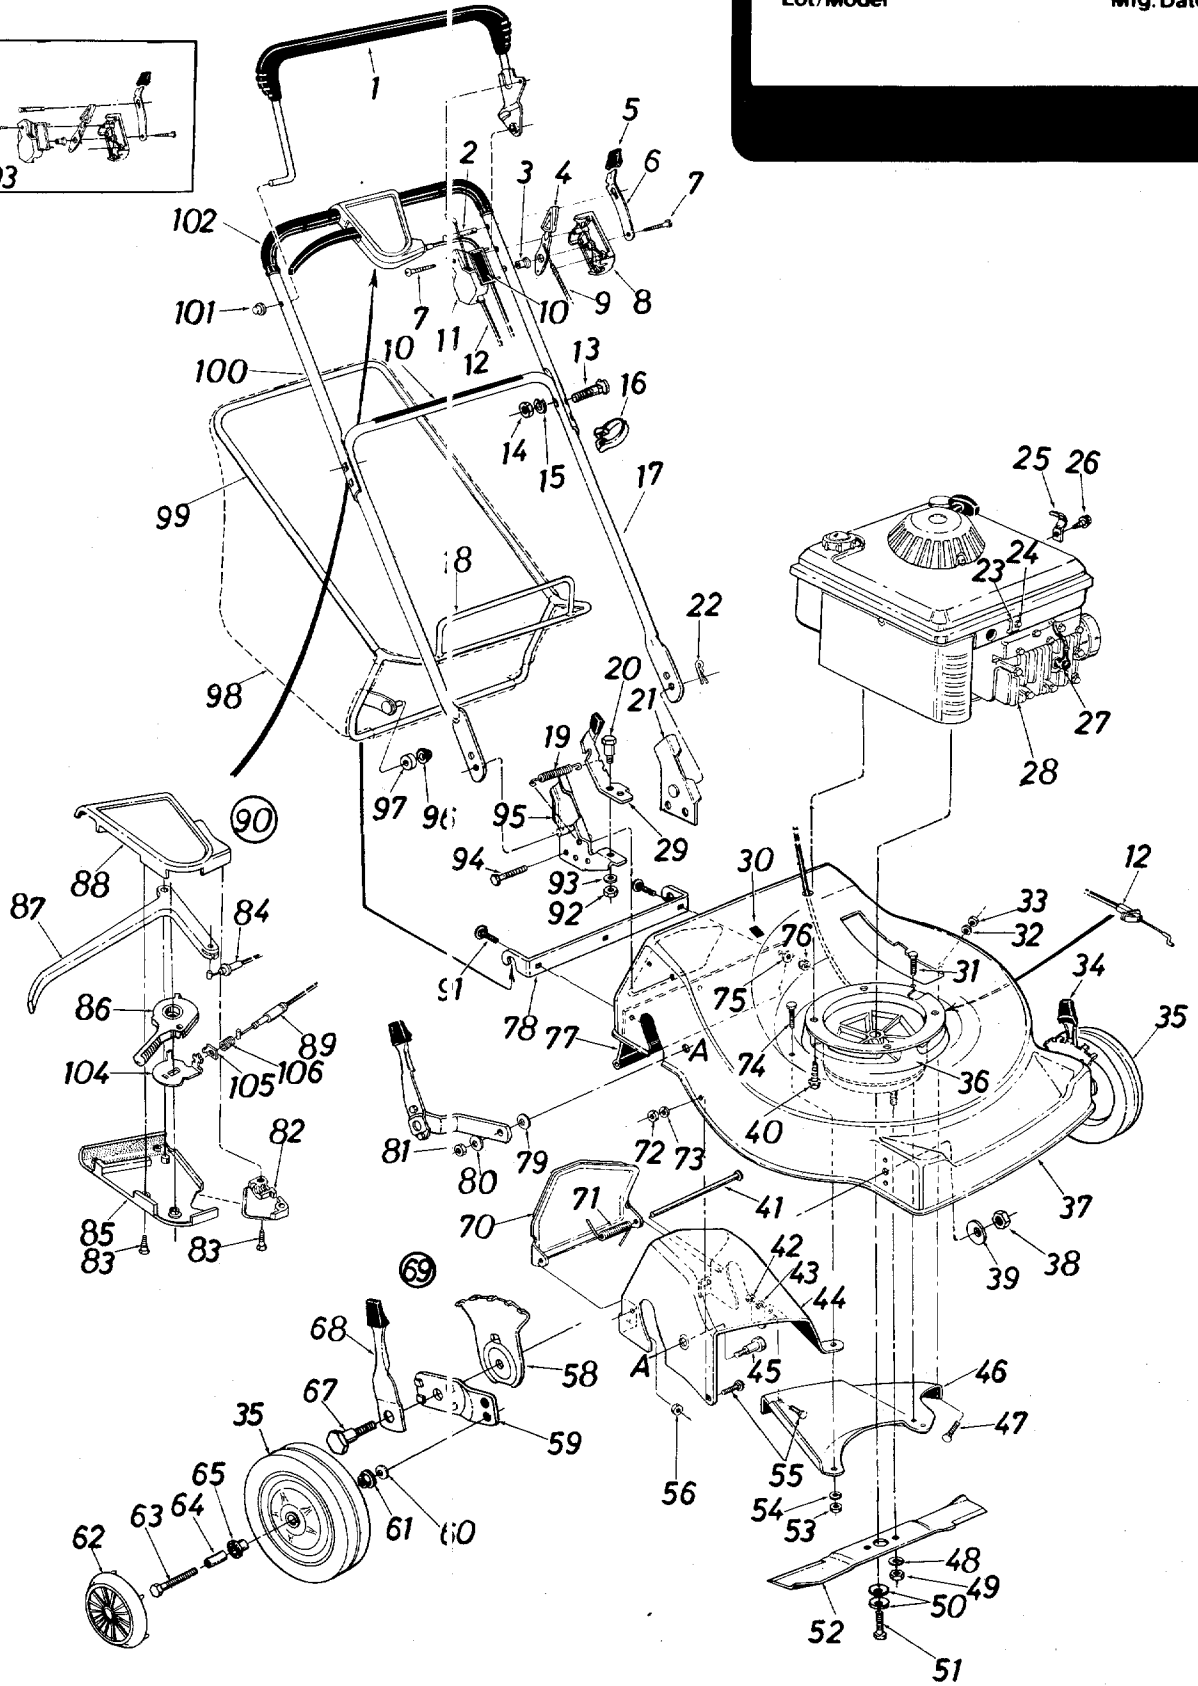

# Model 365

## PARTS LIST FOR MODEL 365 ROTARY MOWER

REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART	REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART
1	731-0609		L.H. Bail Ass'y.		46	14014		Rear Baffle—L.H.	
2	731-0607		Lock Pin		47	710-0167		Carr. Bolt 1/4-20 x .50" Lg.*	
3	731-0524		Control Disc Pin		48	736-0169		L-Wash. 3/8" I.D.*	
4	731-0528		Throttle Control Lever		49	712-0328		Hex Nut 3/8-24 Thd.	
5	720-0190		Spring Lever Knob					(Grade 8)	
6	732-0401		Lockout Spring		50	736-0105		Bell-Wash. .40" I.D. x .88" O.D.	
7	710-0796		Truss Mach. Hi-B Tap Scr. #12 x 1.50" Lg.		51	710-0818		Hex Cl-Bolt 3/8-24 x 2.0" Lg. (Grade 8)	
8	731-0523		Control Panel Half		52	742-0222		22" Blade	
9	746-0472		Throttle Control Wire—58" Lg.		53	712-0287		Hex Nut 1/4-20 Thd.*	
10	777-5166		Control Labels		54	736-0329		L-Wash. 1/4" I.D.*	
11	731-0526		Clutch Panel Half		55	710-0167		Carr. Bolt 1/4-20 x .50" Lg.*	
12	746-0400		Clutch Cable 46" Lg.—Black		56	712-0271		Hex Sems Nut 1/4-20 Thd.	
13	710-0671		Curve Carr. Bolt 5/16-18 x 1.38" Lg.		58	15261		Height Adj. Plate	
14	712-0267		Hex Nut 5/16-18 Thd.*		59	15262		Wheel Pivot Bar	
15	736-0119		L-Wash. 5/16" I.D.*		60	736-0105		Bell-Wash. .40" I.D. x .88" O.D.	
16	726-0192		Cable Tie		61	741-0267		Fig. Ball Brg. 3/8" I.D.	
17	749-0505		Lower Handle (Chrome)		62	731-0354		Plastic Hub Cap	
17	749-0504		Lower Handle (Painted)		63	710-0347		Hex Bolt 3/8-16 x 1.75" Lg.	
18	14582		Catcher Lower Frame Ass'y.		64	750-0434		Spacer .375" I.D. x .505" O.D.	
19	732-0357		Extension Spring 1.12" Lg.		65	741-0484		Fig. Ball Brg. 1/2" I.D.	
20	738-0155		Shld. Bolt .437" Dia. x .162		67	738-0507		Shld. Bolt .50" Dia. x .430	
21	12297		Handle Bracket Ass'y.—L.H.		68	14832		Spring Lever Ass'y. w/Knob	
22	714-0104		Hairpin Cotter 5/16" Dia.		69	14578		Height Adj. Ass'y.—R.H.	
23	710-0429		Hex "B"-Tap Scr. #10 x .38" Lg.		70	13407		Chute Door	
24	751-0333		Casing Clamp		71	732-0346		Torsion Spring	
25	12894		Cable Clip		72	712-0287		Hex Nut 1/4-20 Thd.*	
26	710-0895		Hex Sems Scr. #10-32 x .62" Lg.		73	736-0329		L-Wash. 1/4" I.D.*	
27	735-0639		Spark Plug Insulator		74	710-0206		Hex Bolt 1/4-20 x .88" Lg.	
28	—		Engine		75	736-0211		Fl-Wash. .285" I.D. x 1.25" O.D.	
29	14845		Grass Catcher Lock Lever w/Knob		76	712-0271		Hex Sems Nut 1/4-20 Thd.	
30	731-0564		Plug		77	731-0664		Rear Flap	
31	710-0642		Hex TT-Tap Scr. 1/4-20 x .75" Lg.		78	14012		Grass Catcher Hitch Brkt.	
32	736-0329		L-Wash. 1/4" I.D.*		79	736-0219		Bell-Wash. .400" I.D. x 1.13" O.D.	
33	712-0287		Hex Nut 1/4-20 Thd.*		80	736-0105		Bell-Wash. .400" I.D. x .88" O.D.	
34	14579		Height Adj. Ass'y.—L.H.		81	712-0342		Hex Jam Nut 3/8-16 Thd.	
35	734-0643		Front Wheel Ass'y. Comp. 8 x 1.75		82	731-0763		Cable Mounting Cap	N
36	717-0485		Blade/Brake Clutch Ass'y.—Comp.		83	710-0841		Flat "C"-Sunk Hd. Tap Scr. #10 x .75" Lg.	
37	16327		22" Deck Ass'y.	N	84	746-0466		S.P. Cable x 53" Lg.	N
38	712-0798		Hex Nut 3/8-16 Thd.*		85	731-0762		3-Sp. S.P. Control—Lower Cover	N
39	736-0356		Bell-Wash. .39" I.D. x 1.38" O.D.		86	717-0822		Shimano 3-Sp. Shift Lever	N
40	710-0654		Hex Wash. Hd. TT-Tap Scr. 3/8-16 x 1.0" Lg.		87	731-0620		Control Lever	
41	738-0386		Hinge Pin		88	731-0761		3-Sp. S.P. Control—Upper Cover	N
42	712-0287		Hex Nut 1/4-20 Thd.*		89	717-0823		Shimano 3-Sp. Solid Shift Cable	N
43	736-0329		L-Wash. 1/4" I.D.*		90	753-0417		Clutch Control Housing Comp.	N
44	14236		Rear Chute—R.H.		91	710-0703		Carr. Bolt 1/4-20 x .75" Lg.*	
45	738-0430		Shld. Bolt .500" Dia. x .685"		92	712-0267		Hex Nut 5/16-18 Thd.*	
					93	736-0119		L-Wash. 5/16" I.D.*	

# Model 365

## PARTS LIST FOR MODEL 365 ROTARY MOWER (Continued)

REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART	REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART
94	710-0892		Hex L-Wash. Hd. AB-Tap Scr. 1/4" x .62" Lg.		101	726-0135		Cap Speed Nut	
95	14592		Handle Bracket Ass'y.— R.H.		102	718-0145		Grip	
96	726-0100		Push Nut 3/8" Rod		103	753-0361		Control Housing Comp.	
97	731-0430		Plastic Roller		104	717-0827		Shimano 3-Sp. Shift Lever Brkt.	N
98	764-0171		Grass Bag (Without Flip Top)		105	717-0829		Shimano 3-Sp. Cable Spring Brkt.	N
99	764-0170		Grass Bag (With Flip Top)		106	717-0828		Shimano 3-Sp. Cable Mounting Spring	N
100	749-0278		Catcher Upper Frame						
	749-0437		Upper Handle (Chrome)						
	740-0439		Upper Handle (Painted)						

\*For faster service obtain standard nuts, bolts and washers locally. If these items cannot be obtained locally, order by part number and size as shown on parts list.

(462—Red Flake)

When ordering parts, if color or finish is important use the appropriate color code shown above. (e.g. Red Flake Finish—14005 (462).)



This instruction manual covers various models and all specifications shown do not necessarily apply to your model. Specifications subject to change without notice or obligation.

NOTE: The engine is not under warranty by the mower manufacturer...If repairs or service is needed on the engine, please contact your nearest authorized engine service outlet. Check the "Yellow Pages" of your telephone book under "Engines—Gasoline."











# PARTS INFORMATION

## POWER EQUIPMENT PARTS AND SERVICE

Parts and service are available through the authorized service firms listed below. All orders should specify the model number of your unit, part numbers, description of parts and the quantity of each part required.

## BRIGGS AND STRATTON, TECUMSEH AND PEERLESS PARTS AND SERVICE

Briggs & Stratton, Tecumseh and Peerless parts and service should be handled by your nearest authorized engine service firm. Check the yellow pages of your telephone directory under the listing **Engines—Gasoline**, Briggs & Stratton or Tecumseh Lauson.

**NOTE:** If any parts are found to be missing or defective upon assembly of this unit, write to advise the factory so that immediate replacement can be made.

<b>ALABAMA</b>	<b>BIRMINGHAM</b>	<b>OHIO</b>	<b>CARROLL</b>
Auto Electric & Carburetor Co. . . . .	2625 4th Ave. S. . . . . 35233	Stebe's Mid-State Mower Supply . . . . .	Box 366, 71 High St. . . . . 43112
<b>ARKANSAS</b>	<b>NORTH LITTLE ROCK</b>	Bleckrie, Inc. . . . .	<b>CLEVELAND</b>
Sutton's Lawn Mower Shop . . . . .	5301 Roundtop Drive . . . . .	National Central . . . . .	7900 Lorain Ave. . . . . 44102
	Box 368, Rt. 4 . . . . . 72117	Burton Supply Co. . . . .	<b>WADSWORTH</b>
<b>CALIFORNIA</b>	<b>PORTERVILLE</b>		687 Seville Rd. . . . . 44281
Billious . . . . .	75 North D Street . . . . . 93257		<b>YOUNGSTOWN</b>
<b>COLORADO</b>	<b>DENVER</b>		1301 Logan Ave. . . . .
Spitzer Industrial Products Co. . . . .	6601 N. . . . .		Box 929 . . . . . 44501
	Washington St. . . . . 80229	<b>OKLAHOMA</b>	<b>MUSKOGEE</b>
<b>FLORIDA</b>	<b>JACKSONVILLE</b>	Victory Motors, Inc. . . . .	605 S. Cherokee . . . . . 74401
Radco Distributors . . . . .	4909 Victor St. . . . .	<b>OREGON</b>	<b>PORTLAND</b>
	Box 5459 . . . . . 32207	Kenton Supply Co. . . . .	8216 N. Denver Ave. . . . . 97217
	<b>HIALEAH</b>	<b>PENNSYLVANIA</b>	<b>HARRISBURG</b>
Small Eng. Dist. . . . .	7995 W. 26th Court . . . . . 33016	EECO Inc. . . . .	4021 N. 6th St. . . . . 17110
<b>GEORGIA</b>	<b>EAST POINT</b>		<b>PHILADELPHIA</b>
East Point Cycle & Key Inc. . . . .	2834 Church St. . . . . 30344	Thompson Rubber Co. . . . .	5222-24 N. Fifth St. . . . . 19120
<b>ILLINOIS</b>	<b>LYONS</b>	Bluemont Co. . . . .	<b>PITTSBURGH</b>
Keen Edge Co. . . . .	8615 Ogden Ave. . . . . 60534	Frank Roberts & Sons . . . . .	11125 Frankstown Rd. . . . . 15235
<b>INDIANA</b>	<b>ELKHART</b>		<b>PUNXSUTAWNEY</b>
Parts & Sales Inc. . . . .	2101 Industrial Pkwy. . . . . 46516		R.D. 2 . . . . . 15767
<b>IOWA</b>	<b>DUBUQUE</b>	<b>SCRANTON</b>	
Power Lawn & Garden Equip. . . . .	2551 J.F. Kennedy . . . . . 52001	Scranton Auto Ignition Co. . . . .	1133-35 Wyoming Ave. . . . . 18509
<b>LOUISIANA</b>	<b>NEW ORLEANS</b>	<b>TENNESSEE</b>	<b>KNOXVILLE</b>
Suhren Engine Co. . . . .	8330 Earhart Blvd. . . . . 70118	Master Repair Service . . . . .	2000 Western Ave. . . . . 37921
<b>MARYLAND</b>	<b>TAKOMA PARK</b>	American Sales & Service, Inc. . . . .	<b>MEMPHIS</b>
Center Supply Co. . . . .	6867 New Hampshire . . . . . 20912		3035-43 Bellbrook . . . . . 38116
	Ave. . . . .	<b>TEXAS</b>	<b>DALLAS</b>
<b>MASSACHUSETTS</b>	<b>SPRINGFIELD</b>	Marr Brothers, Inc. . . . .	423 E. Jefferson . . . . . 75203
Morton B. Collins Co. . . . .	300 Birnie Ave. . . . . 01107	Woodson Sales Corp. . . . .	<b>FORT WORTH</b>
<b>MICHIGAN</b>	<b>LANSING</b>		6733 Baker Blvd. . . . .
Lorenz Service Co. . . . .	2500 S. Pennsylvania . . . . . 48910		Hwy. 10 . . . . . 76118
	<b>MOUNT CLEMENS</b>	Bullard Supply Co. . . . .	<b>HOUSTON</b>
Power Equipment Dist. . . . .	340 Hubbard . . . . . 48043	Engine House Inc. . . . .	2409 Commerce St. . . . . 77003
<b>MINNESOTA</b>	<b>HOPKINS</b>		<b>SAN ANTONIO</b>
Hance Distributing Inc. . . . .	420 Excelsior Ave. W. . . . . 55343		8610 Botts Lane . . . . .
<b>MISSOURI</b>	<b>KANSAS CITY</b>		P.O. Box 17867 . . . . . 78217
Automotive Equip. Service . . . . .	3117 Holmes St. . . . . 64109	<b>UTAH</b>	<b>BOUNTIFUL</b>
Ross-Frazier Supply Co. . . . .	<b>ST. JOSEPH</b>	Powered Products . . . . .	485 N 500 W. . . . . 84010
	8th and Monterey . . . . . 64503	<b>VIRGINIA</b>	<b>ASHLAND</b>
Henzler, Inc. . . . .	<b>ST. LOUIS</b>	RBI Corp. . . . .	101 Cedar Ridge Dr. . . . . 23005
	2015 Lemay Ferry Rd. . . . . 63125	<b>WASHINGTON</b>	<b>SEATTLE</b>
<b>NEW JERSEY</b>	<b>BELLMAWR</b>	Equip. Northwest . . . . .	1410 14th Ave. . . . . 98122
Lawnmower Parts Inc. . . . .	717 Creek Rd. . . . . 08030	<b>WISCONSIN</b>	<b>CHILTON</b>
<b>NEW MEXICO</b>	<b>ALBUQUERQUE</b>	Horst Dist. Inc. . . . .	444 N. Madison St. . . . . 53014
Spitzer Eng. & Parts Co. . . . .	1023 Third Ave. N.W. . . . . 87103	<b>NORTH CAROLINA</b>	<b>GOLDSBORO</b>
<b>NEW YORK</b>	<b>CARTHAGE</b>	Smith Hardware Co. . . . .	515 N. George St. . . . . 27530
Gamble Dist., Inc. . . . .	West End Ave. . . . . 13619	Dixie Sales Company . . . . .	335 N. Green . . . . . 27402

### WARRANTY / PARTS AND SERVICE POLICY

(0484)

The purpose of warranty is to protect the customer from defects in workmanship and materials, defects which are NOT detected at the time of manufacture. It does not provide for the unlimited and unrestricted replacement of parts. Use and maintenance are the responsibility of the customer. The manufacturer cannot assume responsibility for conditions over which it has no control. Simply put, if it's the manufacturer's fault, it's the manufacturer's responsibility; if it's the customer's fault, it's the customer's responsibility.

#### CLAIMS AGAINST THE MANUFACTURER'S WARRANTY INCLUDES:

1. Replacement of Missing Parts on new equipment.
2. Replacement of Defective Parts within the warranty period.
3. Repair of Defects within the warranty period.

All claims MUST be substantiated with the following information:

1. Model Number of unit involved.
2. Date unit was purchased or first put into service.
3. Date of failure.
4. Nature of failure.