
OWNERSOUDE

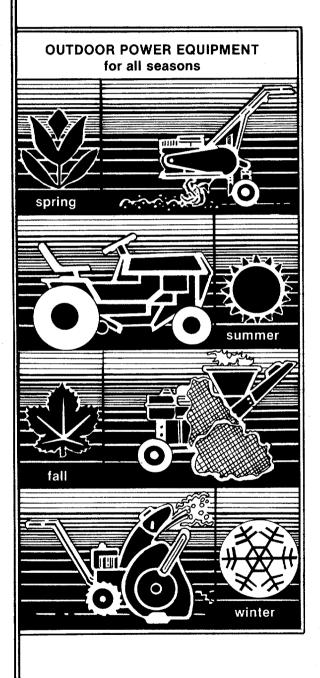

22" Hi-Wheel Self-Propelled Rotary Mower

Model Number 125-553-000

Important:

Read Safety Rules and Instructions Carefully

Thank you for purchasing an American-built product.

PRINTED IN U.S.A. FORM NO. 770-4086

INDEX

Safe Operation Practices3	Maintenance10
Assembly Instructions4	Off-Season Storage
Controls7	Illustrated Parts
Operation	Repair Parts Lists
Adjustments9	Trouble Shooting Chart
Lubrication	Parts Information Back Cover



Instructions given with this symbol are for personal safety. Be sure to follow them.

LIMITED WARRANTY

For one year from the date of original retail purchase, MTD PRODUCTS INC will either repair or replace, at its option, free cf charge, F.O.B. factory or authorized service firm, any part or parts found to be defective in material or workmanship. Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. Transportation charges for any parts submitted for replacement under this warranty must be paid by the purchaser unless such return is requested by MTD PRODUCTS INC.

This warranty will not apply to any part which has become inoperative due to misuse, excessive use, accident, neglect, improper maintenance, alterations, or unless the unit has been operated and maintained in accordance with the instructions furnished. This warranty does not apply to the engine, motor, battery, battery charger or component parts thereof. Please refer to the applicable manufacturer's warranty on these items.

This warranty will not apply where the unit has been used commercially.

Warranty service is available through your local authorized service dealer or distributor. If you do not know the dealer or distributor in your area, please write to the Customer Service Department of MTD.

The return of a complete unit will not be accepted by the factory unless prior written permission has been extended by MTD.

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.



This unit is equipped with an internal combustion engine and should not be used on or near any unimproved forest-covered, brush-covered or grass-covered land unless the engine's exhaust system is equipped with a spark arrester meeting applicable local or state laws (if any). If a spark arrester is used, it should be maintained in effective working order by the operator.

In the State of California the above is required by law (Section 4442 of the California Public Resources Code). Other states may have similar laws. Federal laws apply on federal lands. A spark arrester muffler is available at your nearest engine authorized service center.



To reduce the potential for any injury, comply with the following safety instructions. Failure to comply with the instructions may result in personal injury.

SAFE OPERATION PRACTICES FOR WALK-BEHIND MOWERS

TRAINING

- Read this owner's manual carefully in its entirety before attempting to assemble or operate this machine. Be completely familiar with the controls and the proper use of this machine before operating it. Keep this manual in a safe place for future and regular reference and for ordering replacement parts.
- Your rotary mower is a precision piece of power equipment, not a plaything. Therefore, exercise extreme caution at all times.
- Never allow children to operate a power mower. Only persons well acquainted with these rules of safe operation should be allowed to use your mower.
- No one should operate this unit while intoxicated or while taking medication that impairs the senses or reactions.
- 5. Keep the area of operation clear of all persons, particularly small children and pets. Stop engine when they are in the vicinity of your mower. Although the area of operation should be completely cleared of foreign objects, an object may have been overlooked and could be accidently thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.

PREPARATION

- Thoroughly inspect the area where the equipment is to be used. Remove all stones, sticks, wire, bones and other foreign objects which could be picked up and thrown by the mower in any direction and cause serious personal injury to the operator or any others allowed in the area.
- Do not operate equipment when barefoot or wearing open sandals. Always wear substantial footwear.
- 3. Do not wear loose fitting clothing that could get caught on the mower.
- 4. Check the fuel before starting the engine. Gasoline is an extremely flammable fuel. Do not fill the gasoline tank indoors, while the engine is running, or while the engine is still hot. Wipe off any spilled gasoline before starting the engine as it may cause a fire or explosion.
- Disengage the self-propelled mechanism or drive clutch on units so equipped before starting the engine.
- 6. The blade control handle is a safety device. Never attempt to bypass its operation. Doing so makes the safety device inoperative and may result in personal injury through contact with the rotating blade. The blade control handle must operate easily in both directions.
- 7. Never attempt to make a wheel or cutting height adjustment while the engine is running.
- 8. Mow only in daylight or in good artificial light.
- 9. Never operate the equipment in wet grass. Always

be sure of your footing. A slip and fall can cause serious personal injury. Keep a firm hold on the handle and walk, never run.

OPERATION

- Do not change the engine governor settings or overspeed the engine. Excessive engine speeds are dangerous.
- Do not put hands or feet near or under rotating parts. Keep clear of the discharge opening at all times as the rotating blade can cause injury.
- Stop the blade when crossing gravel drives, walks or roads.
- 4. After striking a foreign object, stop the engine, remove the wire from the spark plug, and thoroughly inspect the mower for any damage. Repair the damage before restarting and operating the mower.
- 5. If the equipment should start to vibrate abnormally, stop the engine and check immediately for the cause. Vibration is generally a warning of trouble.
- 6. Shut the engine off and wait until the blade comes to a complete stop before removing the grass catcher or unclogging the chute. The cutting blade continues to rotate for a few seconds after the engine is shut off. Never place any part of the body in the blade area until you are sure the blade has stopped rotating.
- Before cleaning, repairing or inspecting, make certain the blade and all moving parts have stopped.
 Disconnect the spark plug wire, and keep the wire away from the spark plug to prevent accidental starting.
- 8. Do not run the engine indoors.
- Mow across the face of slopes, never up-and-down. Exercise extreme caution when changing direction on slopes. Do not mow excessively steep slopes. Always be sure of your footing. A slip and fall can cause serious personal injury.
- 10. Always disconnect electric mowers (line operated) before cleaning, repairing or adjusting.
- 11. Never operate mower without proper guards, plates or other safety protective devices in place.

MAINTENANCE AND STORAGE

- Check the blade and engine mounting bolts at frequent intervals for proper tightness.
- Keep all nuts, bolts, and screws tight to be sure the equipment is in safe working condition.
- Never store the equipment with gasoline in the tank inside of a building where fumes may reach an open flame or spark. Allow the engine to cool before storing in any enclosure.
- 4. To reduce fire hazard, keep the engine free of grass, leaves, or excessive grease.
- Check the grass catcher bag frequently for wear or deterioration. For safety protection, replace only with new bag meeting original equipment specifications.



Reference to right or left hand side of the mower is observed from the operating position.

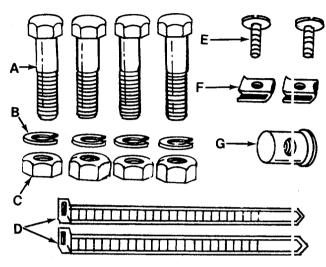


FIGURE 1.

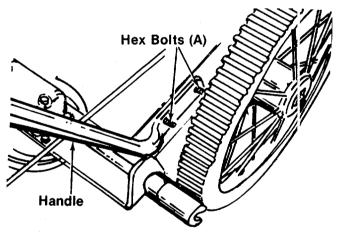


FIGURE 2.

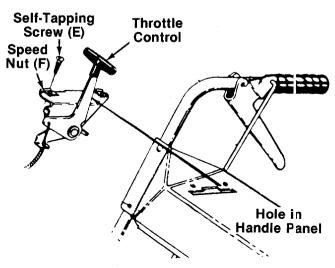


FIGURE 3.

ASSEMBLY INSTRUCTIONS



This unit is shipped WITHOUT GAS-OLINE or OIL. After assembly, see separate engine manual for proper fuel and engine oil recommendations.

- Remove the lawn mower, loose parts, hardware pack and literature from the carton. Make certain all parts and literature have been removed before the carton is discarded.
- Extend the throttle control assembly and lay on the floor. Be careful not to bend or kink control wire.

-Contents of Hardware Pack:

- A (4) Hex Bolts 5/16-24 x 1.25" Long
- B (4) Lock Washers 5/16" I.D.
- C (4) Hex Nuts 5/16-24 Thread
- D (2) Cable Ties
- E (2) Self-Tapping Screws .50" Long
- F (2) Speed Nuts
- G (1) Ferrule
- H (4) Plastic Plugs

Loose Parts in Carton:

Handle Assembly
Drive Clutch Control Rod

←HANDLE ASSEMBLY

- Line up the holes in the handles with the holes in the frame. Secure with hex bolts (A), lock washers (B) and hex nuts (C). See figure 2. Start all four nuts and bolts by hand, then tighten securely.
- Tighten the carriage bolts and nuts which hold the handle panel to the handles, except for the upper carriage bolt on the left hand handle. Leave this bolt loose until after the blade clutch control cable is installed.

← THROTTLE CONTROL INSTALLATION

Place the speed nuts (F), flat side up, onto the throttle control. Place throttle control lever up through the hole in the handle panel. Secure with self-tapping screw (E) as shown in figure 3.

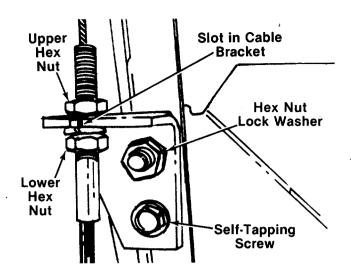


FIGURE 4.

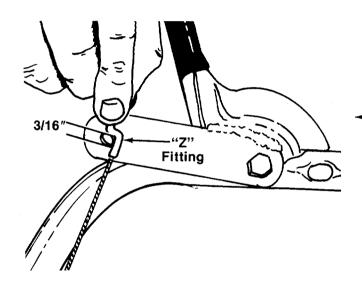


FIGURE 5.

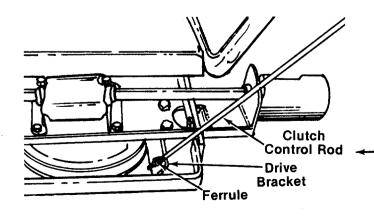


FIGURE 6.

BLADE CLUTCH CONTROL CABLE INSTALLATION

- 1. The blade clutch control cable is attached to the unit. Remove the hex nut from the threaded end of the clutch control cable casing, and slide the nut up the cable.
- 2. Slip the cable into the slot in the cable bracket, which is located behind the left hand—handle. See figure 4. Slide the threaded end of the cable casing up through the bracket. Rethread the hex nut onto the end of the cable casing a few turns. See figure 4.
- 3. Place the clutch grip on the left handle in the raised position. Hold the "Z" end of the cable against the clutch grip as shown in figure 5. Adjust the lower hex nut (underneath the cable bracket) so that the middle of the "Z" fitting is 3/16" above the bottom of the hole on the clutch grip as shown in figure 5.
- 4. Tighten the upper hex nut against the cable bracket.
- Remove the self-tapping screw from the cable bracket. Remove the hex nut and lock washer from the carriage bolt, then remove the cable bracket. See figure 4.
- —6. Hook the "Z" end of the cable into the hole on the clutch grip. Place the cable bracket in position on the handle so there will be no bend or kink in the cable when the clutch grip is in the engaged position (against the handle). Secure with hex nut, lock washer and self-tapping screw.




CAUTION

The final adjustment of the blade clutch control cable must be made before the engine is started. Final adjustment will be covered on page 7.

7. Secure cable to handle with cable ties (D). Cut off excess end of cable ties.

DRIVE CLUTCH CONTROL ROD INSTALLATION

- 1. Remove hairpin cotter and clevis pin which secure clutch grip to the right hand handle. See figure 7. Remove clutch grip.
- Place ferrule (G) in position on drive bracket.
 See figure 6. Thread clutch control rod through ferrule until approximately 1-3/8" of threads show below ferrule. See figure 6.

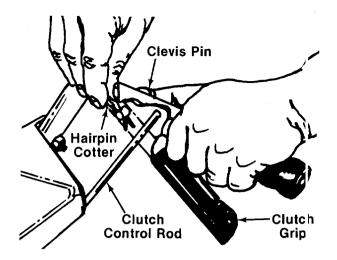


 Hook other end of clutch control rod into clutch grip. Secure clutch grip to handle with —clevis pin and hairpin cotter. See figure 7.



CAUTION

Final adjustment of the clutch rod must be made before the engine is started. Adjustment is covered in "Final Adjustment" section.

FIGURE 7.

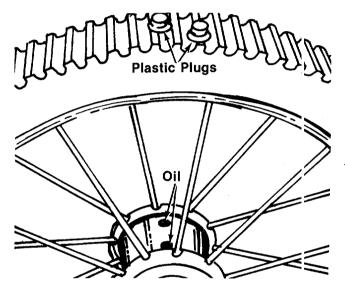

REAR WHEEL LUBRICATION

Add several drops of oil to the hubs of the rear wheels as shown in figure 8. Insert the plastic plugs (H) into the hubs of the rear wheels.

FIGURE 8.

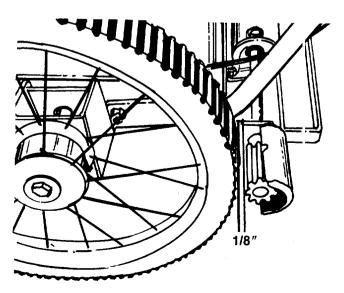


FIGURE 9.

FINAL ADJUSTMENTS Drive Clutch Adjustment (Make this adjustment with the engine off.)

With the drive clutch grip released as shown in figure 7, there should be a minimum clearance of 1/8" between the drive pinions and wheels. See—figure 9. With the clutch engaged (clutch grip squeezed), the pinions should engage solidly into the tread of the wheels.

If adjustment is needed, remove the hairpin cotter and clevis pin. Remove the clutch grip. If there is not 1/8" of clearance, unthread the control rod from the ferrule a few turns. If the pinions do not engage solidly into the wheels, thread the control rod further into the ferrule.

Reassemble the clutch grip and check the adjustment. Repeat as necessary.

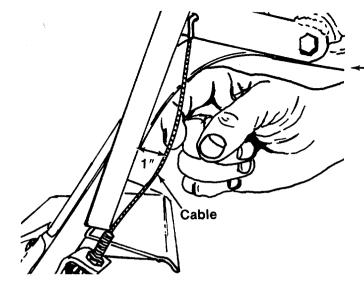


FIGURE 10.

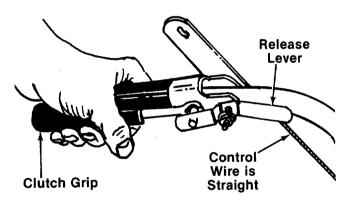


FIGURE 11.

Blade Clutch Adjustment

With the clutch grip in the released (raised) position, the blade clutch control cable should have approximately 1" deflection as shown in figure 10.



There must be slack in the blade clutch cable when the clutch grip is in the released position. Periodically adjust the cable as necessary to maintain the slack.

Push the release lever to free the clutch grip, then squeeze the clutch grip against the handle. The control cable should now be straight. See figure 11


The blade clutch adjustment may be checked as follows.

- 1. Disconnect the spark plug wire from the spark plug and ground it against the engine block.
- 2. Block the wheels of the unit.
- 3. Remove the spindle cover from the frame.
- -4. With the blade clutch grip released, pull the recoil starter rope several times. The belt and blade pulley on top of the deck should not turn.
 - 5. Reassemble the spindle cover.



If the belt slips when cutting heavy grass, the cable could be too loose and should be readjusted as specified.

CONTROLS

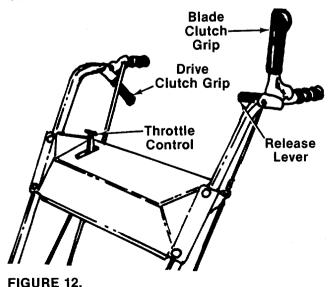

THROTTLE CONTROL

The throttle control is located on the right hand side of handle panel. It controls engine speed. See figure 12.

DRIVE CLUTCH GRIP

The drive clutch grip is located on the right handle of the mower. Squeezing the clutch grip engages the drive pinions into the wheels. Release the clutch handle and the forward motion of the mower stops. You must release the clutch handle to make a turn. See figure 12.

BLADE CLUTCH GRIP

The blade clutch grip is located on the left handle. Push the release lever to free the blade clutch grip, then squeeze the clutch grip against the handle to engage the blade. Release the grip to stop the blade from turning. See figure 12.

OPERATION



FIGURE 13.

Keep hands and feet away from the chute area on cutting deck. See figure 13.

BEFORE STARTING

- Prior to initial operation, use a light cil to lubricate the shoulder bolts at the pivot points where the top drive frame assembly contacts the frame. Refer to figure 16 on page 10.
- Check the lubricant level in the gear box. It
 must be maintained half full at all times and
 should be checked prior to each mowing. See
 the lubrication section of this manual.
- Check the final adjustment section of the Assembly Instructions to be sure the drive clutch and blade clutch controls are working properly.
- 4. Fill sump with oil as instructed in the separate engine manual packed with your unit.
- 5. Fill fuel tank using clean, fresh, lead-free, low-lead, or regular grade leaded gasoline. Fill tank completely!

DO NOT MIX OIL WITH GASOLINE.

TO START ENGINE

- 1. Be certain both clutch grips are in the disengaged position (released). See figure 12.
- Move the throttle control to the "CHCKE" position. See figure 12.

- 3. From the left side, opposite the discharge chute and with one foot on the deck, grasp the recoil starter handle and pull out rapidly. Allow the rope to rewind slowly. If the engine does not start after two or three tries, move the throttle control to the "FAST" position and try again.
- 4. After the engine starts, move the throttle control into the "FAST" position.

TO STOP

- 1. The engine is stopped by moving the throttle control lever to "STOP" position.
- 2. The blade is stopped by releasing the blade clutch grip, located on the left handle.
- 3. Ground movement is stopped by releasing the drive clutch grip, located on the right handle.
- 4. Disconnect spark plug wire from the spark plug and ground to prevent accidental starting while equipment is unattended.

USING YOUR ROTARY MOWER

Be sure that lawn is clear of stones, sticks, wire, or other objects which could damage lawn mower or engine. Such objects could be accidently thrown by the mower in any direction and cause serious personal injury to the operator and others.

Appropriate clothing should be worn when cutting brush or heavy weeds. Safety shoes and safety glasses are highly recommended.

Operate a new engine at intermediate speeds and light load for the first few hours as you would a new automotive engine.

For best results, do not cut wet grass because it tends to stick to the underside of the mower, preventing proper discharge of grass clippings, and could cause you to slip and fall. New grass, thick grass or wet grass may require a narrower cut. Blade speed should be adjusted to the condition of the lawn.

The best mowing pattern is one that allows the clippings to discharge towards the uncut part of the lawn. This permits recutting of the clippings to further pulverize them. When cutting high weeds, discharge towards cut portion, then recut at right angles to first direction.

For best results, cut off one-third or less of the total length of the grass. Lawn should be cut in the fall as long as there is growth.

This mower is designed to be operated at full throttle to give you the best cut. However, unit should be run at slower speeds until operator is thoroughly familiar with controls.



If you strike a foreign object, stop the engine. Remove wire from spark plug, thoroughly inspect the mower for any damage, and repair the damage before restarting and operating the mower. Extensive vibration of the mower during operation is an indication of damage. The unit should be promptly inspected and repaired.

ADJUSTMENTS



Do not at any time make any adjustment to lawn mower without first stopping engine and disconnecting spark plug wire.

DRIVE AND BLADE CLUTCH ADJUSTMENTS

To adjust the drive clutch and blade clutch, refer to the final adjustment section of the assembly instructions.

Clearance between drive pinion and drive wheel should be approximately 1/8" when drive clutch grip is released. Refer to figure 9. Excess clearance will cause premature belt wear. Adjust cable as necessary.

THROTTLE

If adjustment becomes necessary, the throttle control wire assembly can be reset as follows:

- 1. Loosen, but do not remove, screw securing throttle control wire assembly at engine.
- 2. Move throttle control lever on handle to "CHOKE" position.
- 3. Move control lever on engine to full open position. Retighten screw to secure throttle control wire assembly.

CARBURETOR ADJUSTMENTS



If any adjustments are made to the engine while the engine is running (e.g. carburetor), disengage all clutches and blades. Keep clear of all moving parts and be careful of heated surfaces and muffler.

Minor carburetor adjustment may be required to compensate for differences in fuel, temperature, altitude and load.

If carburetor adjustment is required, refer to the separate engine manual packed with your unit.

HEIGHT ADJUSTMENT



Before changing the cutting height, stop the engine and disconnect the spark plug wire.

Unscrew the rear axle bolt and place it in one of the four height adjustment holes. The belleville washer must be installed exactly as shown in figure 14 (cupped side against the frame).

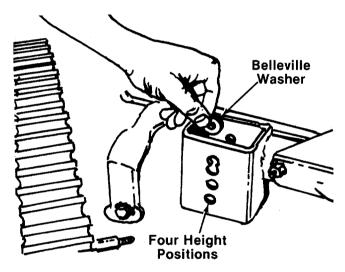


FIGURE 14.

Adjust the front wheels in the same manner. All wheels must be in the same relative position. See figure 15.




FIGURE 15.

LUBRICATION



Always stop engine and disconnect spark plug wire before cleaning, lubricating, or doing any kind of work on the lawn mower.

 Wheels—Front and rear wheel bearings are ball bearing. Lubricate periodically with a few drops of light oil. To lubricate the rear wheels, remove the oil caps and add several drops of oil

Also, if the wheels are removed for any reason, lubricate the surface of the axis bolt and the inner surface of the wheel with light oil. A 4 oz. plastic bottle of light oil lubricant is available. Order part number 737-0170. Engine oil may also be used.

- 2. **Throttle**—Periodically lubricate throttle control lever and throttle wire assembly with a few drops of light oil for ease of operation.
- 3. **Engine**—Follow engine manual for lubrication instructions.
- 4. Gear Box—Check lubricant in the gear box. This must be maintained half full at all times and should be checked prior to each moving. The gear box is packed at the factory with Alduralube Heavy or Temprite No. 2. It is suggested that this or an equivalent type and quality fibrous high heat wheel bearing grease be used in maintaining this mechanism.
- Chute Deflector—The torsion spring and pivot point should be lubricated periodically with light oil to prevent any rust or binding. Deflector must work freely.
- 6. Clutch Control—Lubricate the pivot point on the clutch handle, the cable and the "Z" fitting on end of cable at least once a season with light oil. The control must operate freely in both directions.
- 7. **Pinion Bearings**—Lubricate with a few crops of engine oil once a season. See figure 16.
- 8. The blade spindle bearings are sealed and require no further lubrication.
- Lubricate the idler brake bracket assembly at the pivot point with an automotive chassis grease at least once a season. Refer to page 16, reference number 32.
- 10. Lubricate the shoulder bolts at the pivot points where the top drive frame assembly contacts the frame. See figure 16. Lubricate

all other linkage after every 25 hours of operation with light oil.


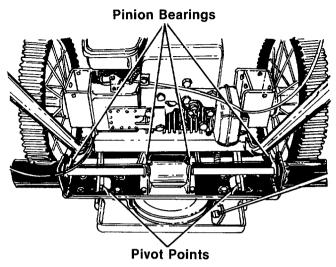


FIGURE 16.

MAINTENANCE

CUTTING BLADE

A. Removal for Sharpening or Replacement



Be sure to disconnect and ground the spark plug wire before working on the cutting blade to prevent accidental engine starting.

 Remove the large bolt and lock washer which holds the scalp plate, blade and adapter to the blade spindle. See figure 17.

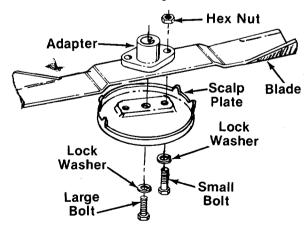


FIGURE 17.

- 2. Remove the scalp plate, blade and adapter from the spindle.
- 3. If the scalp plate, blade or blade adapter needs replacing, remove the two small bolts, lock washers and nut which hold the scalp plate and blade to the adapter.



Periodically inspect the blade adapter for cracks, especially if you strike a foreign object. Replace when necessary.

B. Sharpening

Remove the cutting blade by following the directions of the preceding section.

When sharpening the blade, follow the original angle of grind as a guide. It is **extremely important** that each cutting edge receives an equal amount of grinding to prevent an unbalanced blade. An unbalanced blade will cause excessive vibration when rotating at high speeds, may cause damage to the mower, and could break, causing personal injury.

The blade can be tested for balance by balancing it on a round shaft screwdriver. Remove metal from the heavy side until it balances evenly. See figure 18.

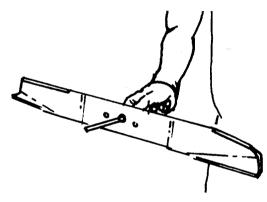


FIGURE 18.



It is recommended that the blade always be removed from the adapter for the best test of balance.

C. Reassembly

Before reassembling the scalp plate, blade and the blade adapter to the unit, lubricate the blade spindle and the inner surface of the blade adapter with light oil. Lubricating the bolt holes, bolts and inner surface of the nuts with light oil is also recommended. A 4 oz. plastic bottle of light oil lubricant is available. Order part number 737-0170. Engine oil may also be used.

When replacing the blade, be sure to install the blade with the side of the blade marked "Bottom" (or with part number) facing the ground when the mower is in the operating position.

Blade Mounting Torque

3/8" Dia. Bolt 375 in. lb. min., 450 in. lb. max. 5/16" Dia. Bolt 150 in. lb. min., 250 in. lb. max.

To insure safe operation of your unit, ALL nuts and bolts must be checked periodically for correct tightness.

DECK

The underside of mower deck should be cleaned after each period of use as grass clippings, leaves, dirt and other matter will accumulate. This accumulation of grass clippings, etc., is undesirable as it will invite rust and corrosion and may cause an uneven discharge of grass clippings at the next cutting.

The deck may be cleaned by tilting the mower forward or on its side and scraping clean with a suitable tool or by washing with a stream of water from a garden hose.



Do not direct the stream of water at a hot engine as damage to the engine may result.

ENGINE OIL

Check oil level before starting and after every 5 hours of operation or each period of use. ADD oil as necessary to keep level FULL TO POINT OF OVERFLOWING. Before removing oil fill plug, clean area around plug to prevent dirt from entering oil fill hole. Engine should be in a level position when checking oil.

Change oil after first 5 hours of operation. Thereafter, change every 25 hours. Change oil while engine is warm. Oil may be drained through oil drain at the base of the engine. Be sure unit is level so that oil drains completely. Oil capacity 13/4 pints.

AIR CLEANER

Clean air cleaner every 25 hours under normal conditions. Clean every few hours under extremely dusty conditions. Poor engine performance and flooding usually indicates that the air cleaner should be serviced. To service the air cleaner, refer to the separate engine manual packed with your unit.

SPARK PLUG

The spark plug should be cleaned and the gap reset once a season. Spark plug replacement is recommended at the start of each mowing season; check engine manual for correct plug type and gap specification.

BELT REPLACEMENT

Drive Belt (See Figure 19)

- 1. Disconnect the spark plug wire and ground it against the engine block.
- 2. Remove the bottom frame assembly.
- 3. Remove the pulley from the pinion shaft. Do not misplace pulley key on pinion shaft
- 4. Remove and replace the drive belt.
- 5. When replacing the pulley, be sure the key is in place on the pinion shaft and that the small hub of the pulley faces up.
- 6. Replace the bottom frame assembly.

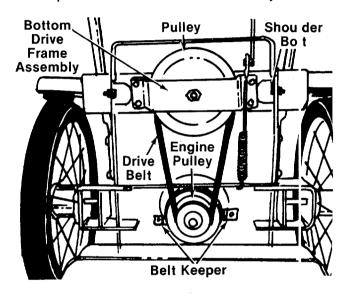


FIGURE 19.

Blade Belt

- Unhook the spring. Remove the shoulder bolts, lock washers and hex nuts which secure the drive mechanism to the frame. See figure 19.
- 2. Remove the drive belt from the engine pulley. See figure 19.
- 3. Remove the belt keeper from each side of the engine pulley. See figure 19.
- 4. Remove the spindle cover from the frame.
- 5. Remove shoulder bolts (belt keepers) at blade pulley. See figure 20.
- 6. Remove hex lock nut at brake bracket assembly. See figure 20.
- 7. Remove brake spring, flat washer and brake return spring from brake bracket assembly. See figure 20.
- 8. Remove the idler pulley from the idler brake bracket assembly. See figure 20.
- 9. Remove shoulder bolt (belt keeper) next to stationary idler. See figure 20.

 Remove and replace the belt. Reassemble in reverse order.

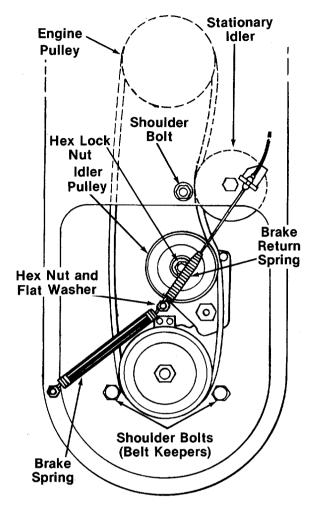


FIGURE 20.

OFF-SEASON STORAGE

The following steps should be taken to prepare lawn mower for storage.

- 1. Clean and lubricate mower thoroughly as described in the lubrication instructions.
- 2. Refer to engine manual for correct engine storage instructions.
- 3. Coat mower's cutting blade with chassis grease to prevent rusting.
- 4. Store mower in a dry, clean area.



When storing any type of power equipment in an unventilated or metal storage shed, care should be taken to rustproof the equipment. Using a light oil or silicone, coat the equipment, especially springs, bearings and cables.



The use of any accessory on this Rotary Mower other than those manufactured by the mower manufacturer is **not** recommended.

GRASS CATCHER Model 065 is available as optional equipment for the mower shown in this manual.



- 1. DO NOT operate the mower without the entire grass catcher or chute deflector in place.
- 2. DO NOT operate the mower without the protective shield on the rear of the deck in place.




Under normal usage bag material is subject to wear and should be checked periodically. Be sure any replacement bag complies with the mower manufacturer's recommendations.

For replacement bags, use only factory authorized replacement bag No. 764-0217.

Meets CPSC Blade Safety Requirements

Lot/Model Mfg. Date

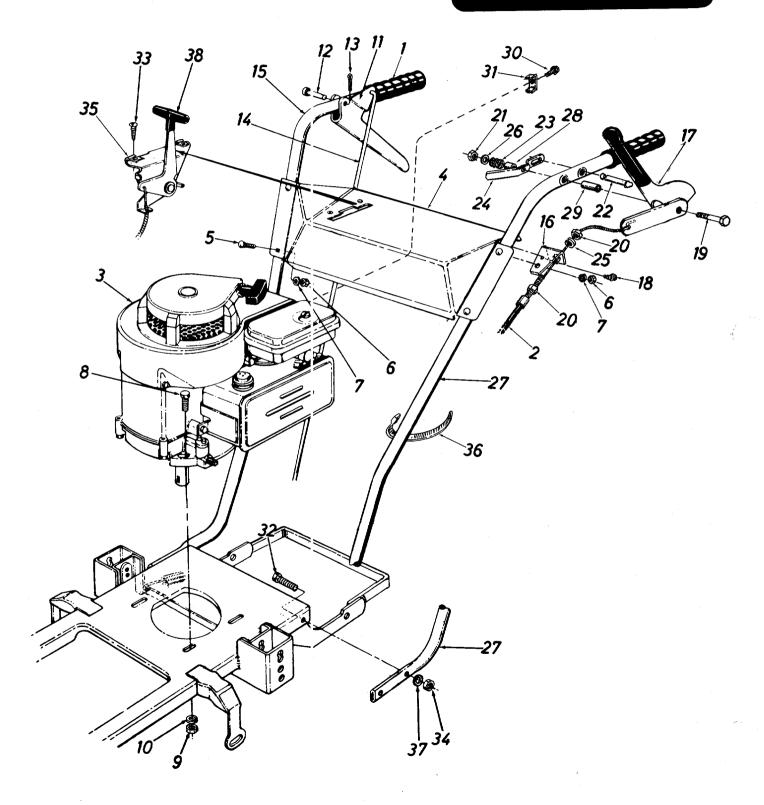

PARTS LIST FOR MODEL 553 ROTARY MOWER

PARTS LIST FOR MODEL 553 ROTARY MOWER						
REF. NO.	PART COLOR NO. CODE	DESCRIPTION	NEW PART			
1	720-0204	Grip				
	746-0507	Clutch Cable—39.0"				
2 3		Engine				
4	15336	Handle Panel				
5	710-0458	Carr. Bolt 5/16-18 x 1.75"				
		Lg.*				
6	712-0267	Hex Nut 5/16-18 Thd.*				
7	736-0119	L-Wash. 5/16" I.D.*				
8	710-0158	Hex Bolt 5/16-24 x 1.25" Lg.*				
9	712-0123	Hex Nut 5/16-24 Thd.*				
10	736-0170	L-Wash. 5/16" I.D.				
11	12921	Clutch Grip Ass'y.				
12	711-0415	Clevis Pin .375" Dia. Intern. Cotter Pin 5/16" Dia.				
13	714-0104	Drive Control Rod				
14 15	747-0165 749-0560	Handle—R.H.				
16	16047	Clutch Cable Brkt.				
17	15853	Blade Clutch Grip Ass'y.				
18	710-0599	Hex Wash. S-Tap Scr. ¼-20				
'0	7 10-0555	x .50" Lg.				
19	710-0641	Hex Bolt 1/4-20 x 2.25" Lg.*				
20	712-0256	Hex Jam Nut 5/16-24 Thd.				
21	712-0291	Hex Cent. L-Nut 1/4-20 Thd.				
22	711-0719	Lock Pin				
23	732-0334	Compression Spring				
24	732-0441	Lockout Spring				
25	736-0119	L-Wash. 5/16" I.D.*				
26	736-0498	Internal Tooth L-Wash.				
27	749-0561	Handle—L.H.				
28	750-0565	Spacer .44" Lg.				
29	750-0566	Spacer 1.03" Lg.				
30	710-0429	Hex AB-Tap Scr. #10 x .38"				
	754 0000	Lg.				
31	751-0333	Casing Clamp				
32	710-0158	Hex Bolt 5/16-24 x 1.25" Lg.*				
33	710-0224	Hex Wash. Hd. AB-Tap Scr. #10 x .50" Lg.				
34	712-0123	Hex Nut 5/16-24 Thd.*				
35	712-0344	Speed Nut 10Z U-Type				
36	725-0157	Cable Tie				
37	736-0119	L-Wash. 5/16" I.D.*				
38	746-0378	Throttle Control				
38	746-0378	Throttle Control				


^{*}For faster service obtain standard nuts, bolts and washers locally. If these items cannot be obtained locally, order by part number and size as shown on parts list.

(462—Red Flake) When ordering parts, if color or finish is important, use the appropriate color code shown at left. (e.g. Red Flake Finish—11992 (462).)



This instruction manual covers various models and all specifications shown do not necessarily apply to your model. Specifications subject to change without notice or obligation.

NOTE: The engine is not under warranty by the mower manufacturer...If repairs or service is needed on the engine, please contact your nearest authorized engine service outlet. Check the "Yellow Pages" of your telephone book under "Engines—Gasoline."

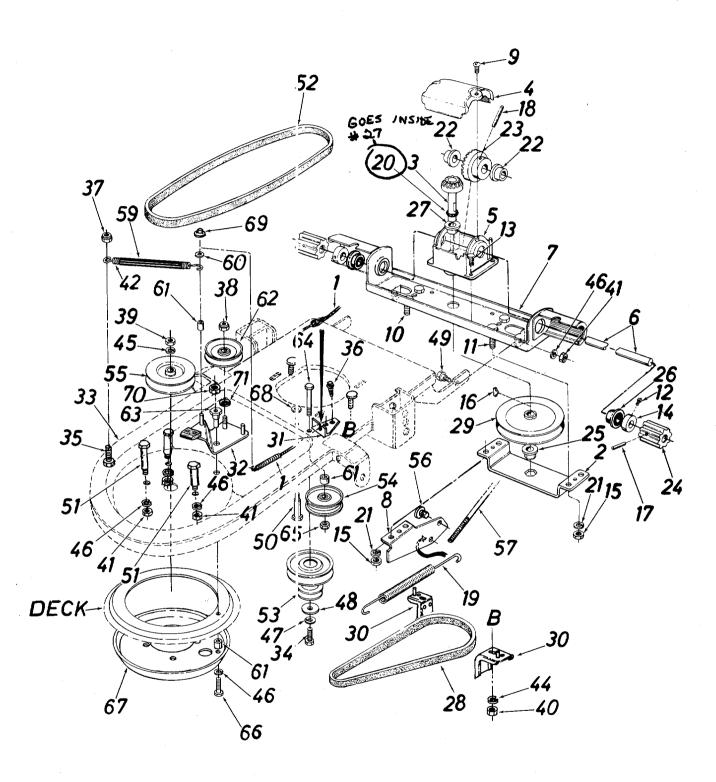

Lubricate with 2 oz. High Temp. 450°F. Grease. Order Part No. 737-0120.

PARTS LIST FOR MODEL 553 ROTARY MOWER

REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART	REF.	PART NO.	r	· · · · · · · · · · · · · · · · · · ·	NEW PART
1	746-050)7	Clutch Cable—39.0"		35	710-025	2	Hex Bolt 1/4-20 x .75" Lg.*	
2	07112		Bottom Frame		36	710-077	6	Hex Wash. Hd. AB-Tap Scr.	
3	07957		Pinion Ass'y.					1/4 " x .62" Lg.	
4	08187		Gear Box Cover		37	712-010		Hex Cent. L-Nut 1/4-20 Thd.	
5	08189		Gear Box†		38	712-011		Hex Ins. L-Nut 3/8-24 Thd.	
6	08348		Drive Shaft		39	712-024		Hex Jam Nut 5/8-11 Thd.	
7	16044		Top Drive Frame Ass'y.		40	712-026		Hex Nut 5/16-18 Thd.*	
8	12587	40	Spring Brkt.		41	712-079		Hex Nut 3/8-16 Thd.*	
9	710-014	18	Hex Wash. Hd. F-Tap Scr.		42	732-030		Extension Spring	
10	710-020	ne	#8 -32 x .38" Lg. Hex Bolt ¼-20 x .88" Lg.*		44 45	736-011 736-015		L-Wash. 5/16" I.D.* L-Wash. 5/8" I.D.*	
10	710-020		Hex Bolt 1/4-20 x .86 Lg. Hex Bolt 1/4-20 x .75" Lg.*		46	736-015		L-Wash. 3/8" I.D.	
12	710-023		Set Scr. 5/16-18 x .25" Lg.		47	736-010		L-Wash. 3/8" I.D.—H.D.	:
13	710-042		Hex Wash. Hd. AB-Tap Scr.		48	736-021		FI-Wash406" I.D. x 1.25"	
13	7 10-07	, O	1/4" x .62" Lg.		40	730-023	5	O.D.	:
14	711-016	sa l	74 X .02 Lg. Collar 5/8" I.D.		49	738-014	વ	Shid. Bolt .498" Dia. x .340"	
15	712-028		Hex Nut 1/4-20 Thd.*		50	738-014		Shid. Bolt .498" Dia. x 1.64"	
16	714-022		#2 Woodruff Key 3/32" x		51	738-021		Shid. Bolt .498" Dia. x 1.450"	
	1 1 7 0 2 1	-	1/2" Dia.		52	754-027		V-Belt ½" x 44.0" Lg. (Blade)	
17	715-015	50	Spring Pin .188" Dia. x 1.12"		53	756-040		Two Step Engine Pulley	
''	'		Lg.		54	756-040		Flat Idler Pulley	
18	715-024	46	Spring Pin Spiral .188" Dia.		55	756-039		½" V-Pulley .503" I.D. x	
			x 1.25" Lg.				=	4.50" O.D.	
19	732-018	35	Extension Spring		56	711-061	9	Adj. Ferrule	
20	735-019	93	O-Ring		57	747-016	5 .	Drive Control Rod	
₹21	736-032		L-Wash. ¼" I.D.		58	712-042		Hex Ins. L-Nut 5/16-18 Thd.	
22	748-01	10	Flange Bearing .630" I.D.†		59	731-067		Plastic Tube	
23	748-013		Bevel Gear		60	736-027	5	FI-Wash343 I.D. x .687 O.D.	
24	748-018		Drive Pinion					x .063	
25	748-022	26	Hex Flange Bearing .503" I.D.		61	750-049	7	Spacer .376 I.D. x .622 O.D. x .44" Lg.	
26	748-013		Ball Bearing .630" I.D.		62	756-029		4.0" Idler Pulley	
27	748-026	69	Hex Flange Bearing .503"		63	738-056		Shoulder Spacer	
			I.D. w/Groove†		64	710-053		Hex Bolt 3/8-24 x 1.75" Lg.*	
28	754-014		V-Belt 1/2" x 33.0" Lg. (Drive)		65	712-029		Hex L-Nut 3/8-24 Thd.	
29	756-039	93	½" V-Pulley .504" I.D. x 6.5"		66	710-072	4	Hex Bolt 3/8-24 x 1.5" Lg.*	
_			O.D.		67	15486		Blade Reinforcement Plate	
30	10426		Belt Keeper Ass'y.		68	712-018		Hex L-Nut 3/8-16 Thd.	
31	15093		Clutch Cable Brkt.		69	726-010		Push Cap 1/4"	
32	15851		Idler Brake Brkt. Ass'y.		70	712-071		Hex Jam Nut 3/8-24 Thd.	
33	15860		Frame Ass'y.		71	736-023	5	Fl-Wash406 I.D. x 1.25 O.D.	
34	710-01	52	Hex Bolt 3/8-24 x 1.00" Lg.*					x .172 Thk.	
				L					


^{*}For faster service obtain standard nuts, bolts and washers locally. If these items cannot be obtained locally, order by part number and size as shown on parts list.

(462—Red Flake) When ordering parts, if color or finish is important, use the appropriate color code shown at left. (e.g. Red Flake Finish—11992 (462).)

†Order Kit 753-0218

The engine is not under warranty by the mower manufacturer. If repairs or service is needed on the engine, please contact your nearest authorized engine service outlet. Check the "Yellow Pages" of your telephone book under "Engines—Gasoline."



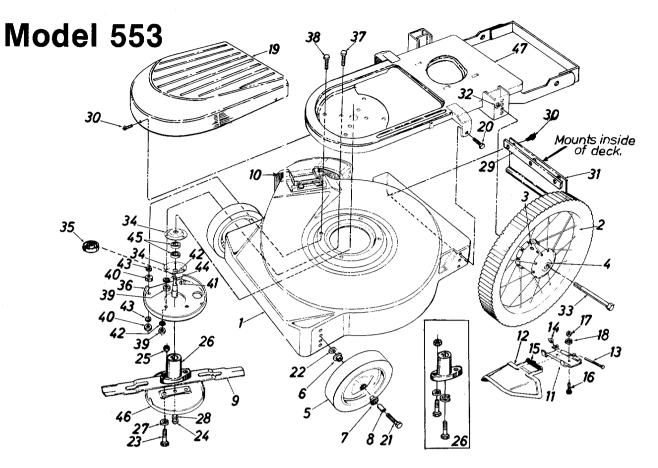

PARTS LIST F()R MODEL 553 ROTARY MOWER									
REF. NO.	PART NO.	COLOR CODE	DESCRIPTION	NEW PART		PART NO.	COLOR CODE	DESCRIPTION	NEW PART
1	14918		22" Deck Ass'y.		23	710-088	38	Hex Bolt 5/16-24 x 1.00" Lg.	
2	734-043	8	16" Wheel Ass'y. Comp.		24	710-033	31	Hex Bolt 3/8-24 x 2.25" Lg.	
	734-018	10	Rim Only		25	712-012	23	Hex Nut 5/16-24 Thd.*	1
	734-039	1	Tire Only		26	753-034	48	Blade Adapter Kit]
3	718-013		Oil Cap		27	736-01		L-Wash. 5/16" I.D.*	1
4	741-011	3	Ball Bearing		28	736-02	17	L-Wash. 3/8" I.D.—H.D.	1
5	734-064	2	Wheel Ass'y. Comp.		29	14836		Retaining Strip	1
			8 x 1.75 (Twinline Tread)	•	30	710-077	76	Hex Wash. Hd. AB-Tap Scr.	1
	734-064	4	Wheel Ass'y. Comp. 8 x .75					1/4 " x .62" Lg.	1
	,		(Waffle Tread)		31	731-058	37	Rear Flap Ass'y.	
6	741-026	7	Flanged Ball Bearing 3/8		32	736-010	05	Bell-Wash400" I.D. x .88"	1
			I.D.	}	33	738-0114 Rear Axle Bolt		Rear Axle Bolt	
7	741-048	34	Flanged Ball Bearing 1/2" I.D.	İ	34	08253		Bearing Housing	1
8	750-043	34	Spacer		35	13703		Bearing Shield	
9	742-012	25	22" Blade		36	15486		Blade Reinforcement Plate	
10	11679		Chute Deflector Ass'y.		37	710-018	58	Hex Bolt 5/16-24 x 1.25" Lg.*	<u>'</u>
	:		Comp.		38	710-019	91	Hex Bolt 3/8-24 x 1.25" Lg.	
11	11130		Adapter Plate		39	712-012	23	Hex Nut 5/16-24 Thd.*	
12	11141		Deflector Ass'y.	İ	40	712-02	41	Hex Nut 3/8-24 Thd.*	
13	711-055	55	Pivot Pin		41	714-036	35	#6 Hi-Pro Key 5/32" x 5/8"	
14	726-010)6	Push Cap 1/4 " Rod					Dia.	
15	732-025	3	Torsion Spring		42	736-01	19	L-Wash. 5/16" I.D.*	
16	710-028		Hex Bolt 1/4-20 x .50" Lg.*		43	736-016		L-Wash. 3/8" I.D.*	1
17	712-028		Hex Nut 1/4-20 Thd.*		44	738-05		Blade Spindle	
18	736-032	9	L-Wash. 1/4" I.D.*		45	749-09	19	Ball Bearing .787" I.D. x	
19	08295		Blade Spindle Cover					1.85" O.D.	
20	710-020	9	Hex Sems Scr. 3/8-16 x .62"		46	07919		Scalp Plate	
21	710-042		Hex Bolt 3/8-16 x 2.0" Lg	-	47	15860		Frame Ass'y.	
22	736-010)5	Bell-Wash400" I.D. x .83"						

Trouble Shooting Chart

Cause	Remedy		
 A Check fuel tank for gas B Spark plug lead wire disconnected C Throttle control lever not in the starting position D Faulty spark plug 	 A Fill tank if empty. B Connect lead wire. C Move throttle lever to start position. D Spark should jump gap between control electrode and side electrode. If spark does not jump, replace the spark 		
E Carburetor improperly adjusted, engine floodedF Old stale gasoline	plug. E Remove spark plug, dry the plug, crank engine with plug removed, and throttle in off position. Replace spark plug and lead wire and resume starting procedures. F Drain and refill with fresh gasoline.		
A Spark plug wire loose	A Connect and tighten spark		
B Carburetor improperly	plug wire. B Adjust carburetor. See separate		
adjusted	engine manual. C Clean air cleaner as described		
o birty air cicario.	in separate engine manual.		
A Dirt in gas tank	A Remove the dirt and fill tank with fresh gas.		
B Dirty air cleaner	B Clean air cleaner as described in separate engine manual.		
C Water in fuel supply	C Drain contaminated fuel and fill tank with fresh gas.		
 D Vent in gas cap plugged E Carburetor improperly adjusted 	D Clear vent or replace gas cap. E Adjust carburetor. See separate engine manual.		
A Carburetor idle speed too	A Adjust carburetor. See separate engine manual.		
B Spark plug gap too close	B Adjust to .030".		
justment improperly set	C Adjust carburetor. See separate engine manual.		
 A Spark plug fouled, faulty, or gap too wide B Carburetor improperly adjusted C Dirty air cleaner 	 A Reset gap to .030" or replace spark plug. B Adjust carburetor. See separate engine manual. C Clean air cleaner as described in separate engine manual. 		
A Carburetor not adjusted properly B Air flow restricted	A Adjust carburetor. See separate engine manual. B Remove blower housing and		
C Engine oil level low	clean as described in separate engine manual. C Fill crankcase with the proper oil.		
A Cutting blade loose or unbalanced B Bent blade	A Tighten blade and adapter. Balance blade. B Replace blade.		
	A Check fuel tank for gas B Spark plug lead wire disconnected C Throttle control lever not in the starting position D Faulty spark plug E Carburetor improperly adjusted, engine flooded F Old stale gasoline A Spark plug wire loose B Carburetor improperly adjusted C Dirty air cleaner A Dirt in gas tank B Dirty air cleaner C Water in fuel supply D Vent in gas cap plugged E Carburetor improperly adjusted A Carburetor idle speed too slow B Spark plug gap too close C Carburetor idle mixture adjustment improperly set A Spark plug fouled, faulty, or gap too wide B Carburetor improperly set A Spark plug fouled, faulty, or gap too wide B Carburetor improperly adjusted C Dirty air cleaner A Carburetor not adjusted properly B Air flow restricted C Engine oil level low A Cutting blade loose or unbalanced		

Note: For repairs beyond the minor adjustments listed above contact your local authorized service dealer.

PARTS INFORMATION

POWER EQUIPMENT PARTS AND SERVICE

Parts and service are available through the authorized service firms listed below. All orders should specify the model number of your unit, part numbers, description of parts and the quantity of each part required.

BRIGGS AND STRATTON, TECUMSEH AND PEERLESS PARTS AND SERVICE

Briggs & Stratton, Tecumseh and Peerless parts and service should be handled by your nearest authorized engine service firm. Check the yellow pages of your telephone directory under the listing **Engines—Gasoline**, Briggs & Stratton or Tecumseh Lauson.

NOTE: If any parts are found to be missing or defective upon assembly of this unit, write to advise the factory so that immediate replacement can be mad a.

ALABAMA	BIRMINGHAM	(OHIO	CARROLL
Auto Electric & Carburetor Co	2625 4th Ave. S	233	Stebe's Mid-State Mower Supply	Box 366-71 High St 43112
ARKANSAS Sutton's Lawn Mower Shop	NORTH LITTLE ROCK			CLEVELAND
Sutton's Lawn Mower Shop	5301 Roundtop Drive		Bleckrie, Inc	7900 Lorain Ave 44102
CALIFORNIA Billious	Box 368, Rt. 4 721	117	National Central	WADSWORTH
Pillious	PORTERVILLE		National Central	687 Seville Rd 44281
COLORADO	75 North D Street 932	257	Burton Supply Co	YOUNGSTOWN
Spitzer Industrial Products Co	6601 N		Burton Supply Co	1301 Logan Ave.
opitzer industrial rioducts co	Washington St 200	220 6	OKLAHOMA Victory Motors, Inc.	Box 929
FLORIDA Radco Distributors	JACKSONVILLE	229	Victory Motors Inc	MUSKUGEE
Radco Distributors	4909 Victor St.	(DREGON	PORTIAND
	Box 5459 322	207	DREGON Kenton Supply Co	8216 N Denver Δve 97217
	ΗΙΔΙ ΕΔΗ	P	PENNSYLVANIA	HARRISBURG
Small Eng. Dist	7995 W. 26th Court 330	016	PENNSYLVÁNÍA EECO Inc	4021 N. 6th St 17110
GEORGIA East Point Cycle & Key Inc	EAST POINT			PHILADELPHIA
ILLINOIS	2834 Church St 303	344	Thompson Rubber Co	
ILLINOIS Keen Edge Co	9615 Onder Ave	E0.4		PITTSBURGH
INDIANA	OO IS OGUEH AVE 305	534	Bluemont Co	11125 Frankstown Rd 15235
INDIANA Parts & Sales Inc	2101 Industrial Pkwy 165	516	Eronk Doborto & Cons	PUNXSUTAWNEY
IOWA	DUBLIQUE	310	Frank Roberts & Sons	SCRANTON
Power Lawn & Garden Equip	2551 J.F. Kennedy 520	001	Scranton Auto Ignition Co	1133.35 Wyoming Avo. 19500
LOUISIANA	NEW ORLEANS		ENNESSEE	KNOXVILLE
LOUISIANA Suhren Engine Co	8330 Earhart Blvd 701	118	ENNESSEE Master Repair Service	2000 Western Ave 37921
MARYLAND Center Supply Co	TAKOMA PARK			MEMPHIS
Center Supply Co	6867 New Hampshire		American Sales & Service, Inc	
MASSACHUSETTS Morton B. Collins Co	Ave 209	1912 ד		
MASSACHUSETTS	SPRINGFIELD		Marr Brothers, Inc	DALLAS 423 E. Jefferson 75205
Morton B. Collins Co	300 Birnie Ave 011	107	Woodson Sales Corp	FORT WORTH
MICHIGAN Lorenz Service Co	2500 C Depositionia 490	010	Woodson Sales Corp	6733 Baker Blvd.
Lorenz Service Co	MOUNT CLEMENS	910		6733 Baker Blvd. Hwy. 10
Power Equipment Dist	340 Hubbard 480	UNG	Bullard Supply Co	HOUSTON
MINNESOTA	HOPKINS	040		AAN ANTONIO
Hance Distributing Inc.	420 Excelsior Ave. W 553	343	Engine House Inc	9610 Potts Long
MISSISSIPPI Biloxi Sales & Service, Inc	BILOXI			
Biloxi Sales & Service, Inc	506 Caillavet St 395	533 L	JTAH	BOUNTIFUL
MISSOURI Automotive Equip. Service	KANSAS CITY		POWERED Products	485 N 500 W 84010
Automotive Equip. Service	3117 Holmes St 341	109 v	IRGINIA	ASHLAND
Ross-Frazer Supply Co	ST. JOSEPH		TRGINIA RBI Corp	. 101 Cedar Ridge Dr 23005
Ross-Frazer Supply Co	8th and Monterey 345	3U3 1A	VASHINGTON Equip. Northwest	SEATTLE
Henzler, Inc.	2015 Lampy Form Rd 321	105	Equip. Northwest	. 1410 14th Ave 98122
NEW JERSEY	RELIMAND		VISCONSIN Horst Dist. Inc.	CHILTON
NEW JERSEY Lawnmower Parts Inc	717 Creek Rd 180	030	HOIST DIST. INC.	. 444 N. Madison St 53014
NEW MEXICO	ALBUQUERQUE	N N	ORTH CAROLINA Smith Hardware Co	GOLDSBORO
Spitzer Eng. & Parts Co	1023 Third Ave. N.W 371		omini Hardware Co	. 515 N. George St 27530
NEW YORK Gamble Dist., Inc	CARTHAGE	=	Divio Salon Company	GREENSBORO
Gamble Dist., Inc	West End Ave 136	619	Dixie Sales Company	. 335 N. Green 27402

WARRANTY PARTS AND SERVICE POLICY

(0484)

The purpose of warranty is to protect the customer from c efects in workmanship and materials, defects which are NOT detected at the time of manufacture. It does not provide for the unlimited and unrestricted replacement of parts. Use and maintenance are the responsibility of the customer. The manufacturer cannot assume responsibility for conditions over which it has no control. Simply put, if it's the manufacturer's fault, it's the manufacturer's responsibility.

CLAIMS AGAINST THE MANUFACTURER'S WARRANTY INCLUDES:

- 1. Replacement of Missing Parts on new equipment.
- 2. Replacement of Defective Parts within the warranty period.
- 3. Repair of Defects within the warranty period.

All claims MUST be substantiated with the following information:

- 1. Model Number of unit involved.
- 2. Date unit was purchased or first put into service.
- 3. Date of failure.
- 4. Nature of failure.