



INSTALLATION INSTRUCTIONS  
**FSA-1005 and KSA-1005**  
**FLAT PANEL DISPLAY SECURITY KIT**

Prior to assembly, unpack carton completely and verify contents.  
 If you are missing any of the following components, please contact Customer Service at 1-800/582-6480




Figure 1

- |                                       |                              |
|---------------------------------------|------------------------------|
| (4) Security Pivot Bolt, 4"           | (4) M4 x 12mm Security Screw |
| (1) 1/4-20 x .25" Security Screw      | (4) M4 x 20mm Security Screw |
| (1) 1/4-20 x .625" Set Screw          | (1) 1/8" Hex Key             |
| (1) 5/16-18 x .75" Security Set Screw | (1) 5/32" Security Hex Key   |
|                                       | (1) 3/16" Security Hex Key   |

**BEFORE PROCEEDING, READ INSTALLATION INSTRUCTIONS COMPLETELY**

**CAUTION! FLAT PANEL DISPLAYS ARE EXTREMELY FRAGILE.**

**Note: In some installations (i.e. single arm mount) not all fasteners included in this kit will be required.**

1. Remove and replace existing fasteners on small flat panel mount (dual arm assembly shown for reference) with tamper-resistant fasteners (see Figure 2).

**Note: There are two possible wall plates with different security requirements.**

**Option I:** If your wall plate uses a 1/4-20 setscrew, replace it using the 1/4-20 x .625" setscrew. The existing setscrew in the wall plate is too long to be used in conjunction with the 1/4-20 x .25" security screw.

**Option II:** If your wall plate uses a 5/16-18 set screw, replace the setscrew with the security version included in this kit.

**Note: In some installations (i.e. single arm mount) not all fasteners included in this kit will be required.**

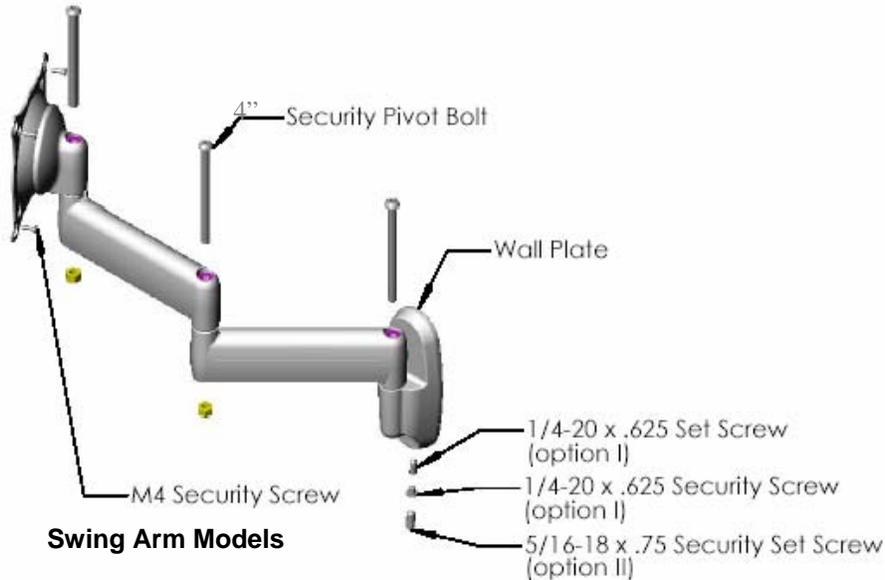


Figure 2