


# COOPER LIGHTING - SURE-LITES®



## ELX SERIES

Edge-Lit  
AC Only

Recessed


### EXIT LIGHTING

- Dual Voltage Input  
120/277 VAC or 120/347 VAC  
60 Hz
- 20 gauge recessed steel  
housing with nine conduit  
knockouts
- Injection molded high-  
impact acrylic panel
- LED or Fluorescent  
Lamping
- AC fluorescent: two energy  
saving, long life F8T5  
fluorescent lamps
- Fluorescent lamps wired for  
separate circuits
- Mirror background  
standard on double face  
exits
- Molded letters and  
chevrons improve aesthetic  
appearance and increase  
visibility
- Torsion springs secure trim  
plate to housing
- Easily removable  
electronics tray
- Damp Location Listed
- UL 924 Listed, Life Safety  
NFPA 101, NEC/OSHA,  
most state and local codes  
UL FTBR Listed - Standard  
Fluorescent, LED with 2C  
Option

### DESCRIPTION

The Sure-Lites ELX Series Recessed Exits are designed for architectural excellence and minimal presence. The crystal clear wedge shaped panel allows architectural details to shine through while providing excellent light distribution and exit visibility. Long life, energy-efficient LED lamps reduce energy costs and eliminate routine lamp maintenance.


### DIMENSIONS

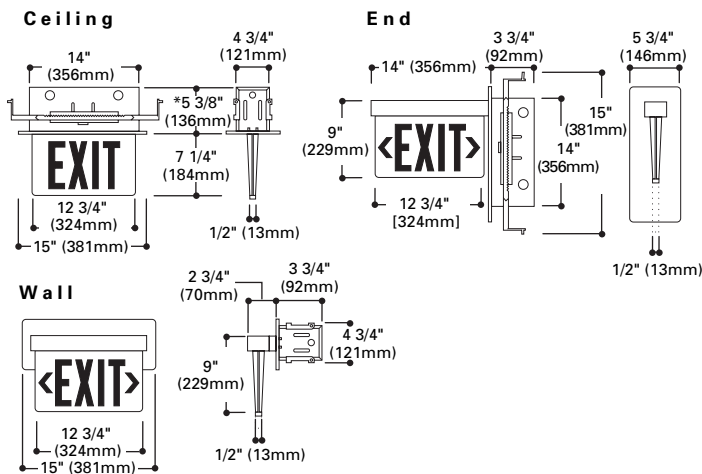

\*Fluorescent Only (LED=3 3/4")

### ORDERING INFORMATION

SAMPLE NUMBER: ELX4100RMARE

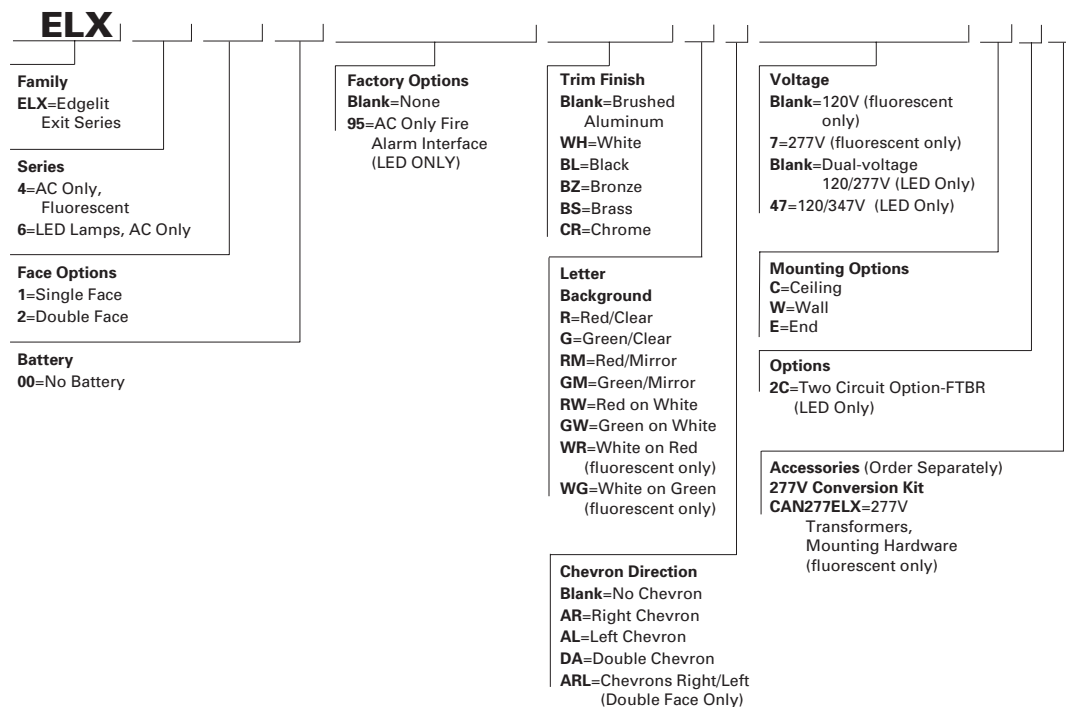

### CHEVRON CONFIGURATION

	FRONT	BACK	FACE
AR	EXIT>	Blank	Single
AL	<EXIT	Blank	Single
DA	<EXIT>	Blank	Single
DA	<EXIT>	<EXIT>	Double
ARL	EXIT>	<EXIT	Double

### Energy Data

	Input Power:			Input Current (Max.):			Power Factor:			T.H.D.:		
	120V	277V	347V	120V	277V	347V	120V	277V	347V	120V	277V	347V
<b>Fluorescent Exits</b>												
Fluorescent Exits -8W Lamps	20W	26W	—	.30A	.31A	—	>.56	>.30	—	>10%	>11%	—
<b>LED Exits</b>												
LED Exits -Red Letters	1.5W	2.1W	2.0W	.04A	.04A	.04A	>.34	>.19	>.15	<35%	<19%	<17%
LED Exits - Green Letters	3.0W	3.1W	3.2W	.03A	.03A	.03A	>.73	>.34	>.28	<50%	<30%	<26%

<sup>1)</sup> Consult your Cooper Lighting Representative.