


Decorative Emergency Ballast **SU-EM**

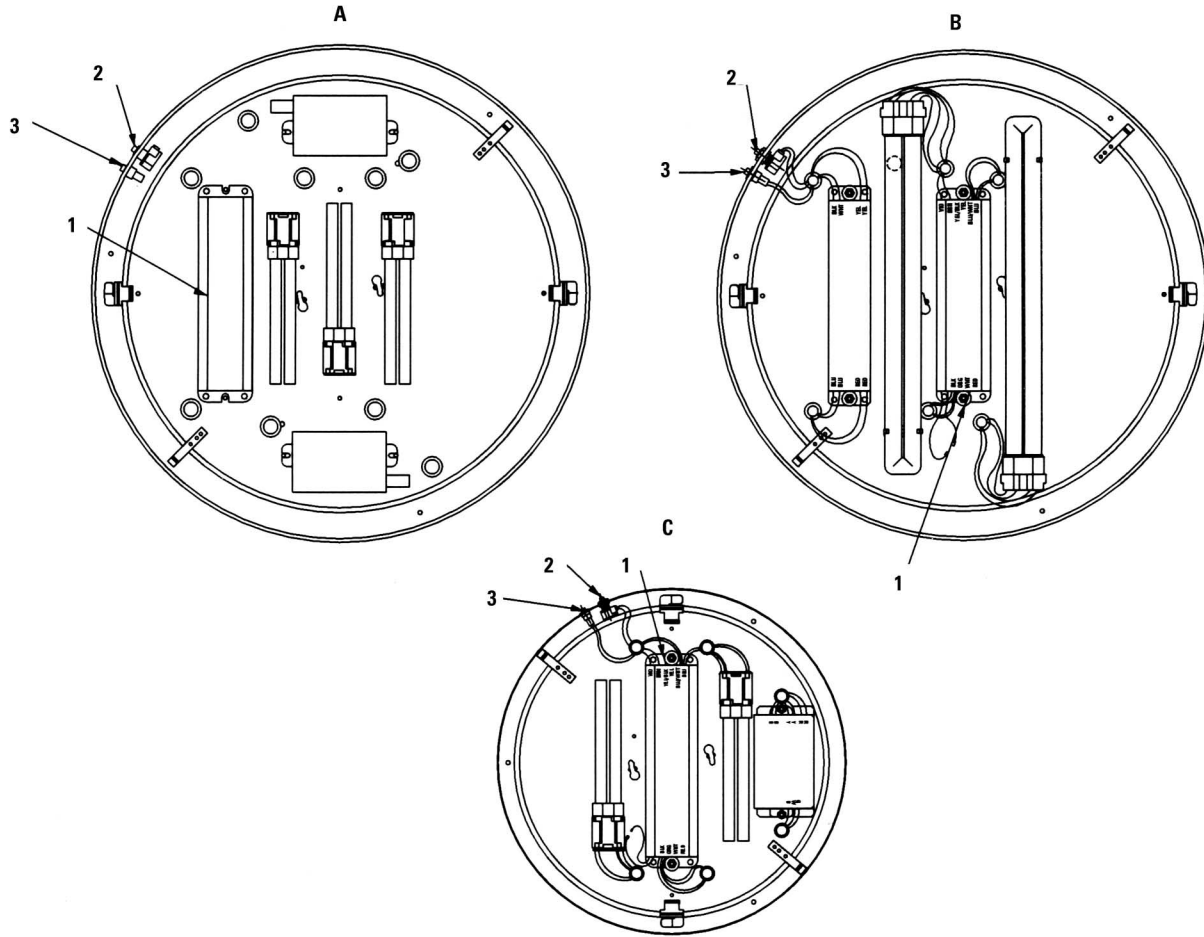

Ordering Information

	Lamp	Wattage	Ballast	Recharge Time	Charging Current
A	(3) Quad 4-Pin	26W	Electronic Universal Voltage 120V or 277V	24 Hours	280 mA
B	(2) Twin 4-PIN	39W	120V OR 277V		
C	(2) Quad 4-Pin	26 W	Electronic Universal Voltage 120V or 277V		

Features

- Battery Pack:** Provides 90-minute emergency lighting when AC power fails. Fully enclosed, long-life nickel cadmium; charges from 120 and 277VAC. Meets National Electric and Life Safety Code.
- Test Switch:** Single pole.
- Charging Indicator Light:** LED

Lumen Output W/Battery Pack

Lamp Types	Watts	Lumens 2 Lamp
PL-C 26W/4P,CF26DD/E/ F26DBXT4/SPX*/4P	26W	700
PL-L36W, FT36DL/ F39/36BX/SPX	36/39W	750

Labels

UL Listed, For indoor Dry Locations Only.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER