
Page 1 of 2

Lytetube Indirect Lens 2-Light T8 Per 4-Foot Section

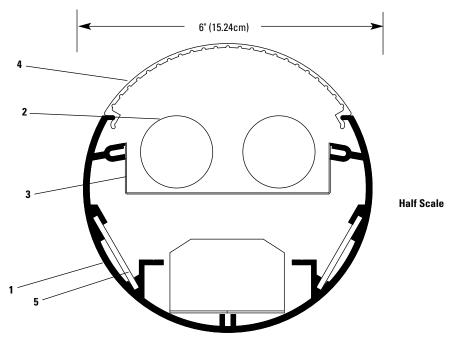

Ordering Information

Lytetube Indirect Lens Two Lamps:

4 Foot Joiner: RT622142 8 Foot Joiner: RT622182

Complete ordering instructions on back.

Ballast & Voltage (add code to end of base catalog number - Example: RT622182E82)

E81 = T8 Electronic 120v HD1 = T8 Electronic PowerSpec Dimming 120v E82 = T8 Electronic 277v HD2 = T8 Electronic PowerSpec Dimming 277v

M71 = T8 Electronic Dimming 120v M72 = T8 Electronic Dimming 277v

For all fixtures represented in this family please refer to the brochure and/or additional specification sheets

Features

- 1. Housing: Extruded aluminum. 1/8" (0.32cm) aluminum end cap attached with no exposed fasteners.
- 2. Lamping: Two T8 32 watt fluorescent lamps. Provided by others.
- 3. Reflector: Precision die-formed high gloss baked white enamel reflector.
- 4. Louver: Extruded clear acrylic linear ribbed lens.
- 5. Alignment/Locking Mechanism: Heavy gauge steel bracket with integral splines for alignment of housing modules, joins modules tightly together without removing any luminaire component at time of installation.

Electrical

Specify 120 volt or 277 volt. 3 conductor, 18 gauge wire. Color-coded quick connectors allow ease of connection for joiner modules. For special circuiting, consult factory. Rapid start, HPF, class "P" thermally protected. PowerSpec HDF dimming ballast is available. Factory installed ballast disconnect allows the ballast to be disconnected from and reconnected to incoming power under load without turning the entire circuit off.

Mountings

Cable Suspension (not shown)- 1-1/2" (3.81cm) or 4-1/2" (11.43cm) diameter flat canopy finished enamel white, 3/16" (0.48cm) diameter x 4" (10.16cm) stabilizing tube (polished chrome finish), 1/16" (0.16cm) diameter stainless steel aircraft cable adjustable up to 36" (91.44cm), adjustable cable gripper. Available with both white jacketed straight or coiled cord. Feed locations require a 4-1/2" (11.43cm) canopy. Coiled cord not available in dual switching or emergency battery backup. Stem Mounting (not shown) - 4-1/2" (11.43cm) diameter flat canopy, 1/2" (2.08cm) diameter stem. Chrome plate or white finish. Can be cut to length on job. Self-aligning swivel provides adjustability up to 38°. The stem assembly shall meet or exceed the requirements set forth in the State of California Uniform Building Code for suspended lighting fixtures installed in seismic zone four. Wall Mounting (not shown) - consult factory for availability.

Finish

Powder coated baked white enamel. Custom colors available, consult factory.

Options and Accessories

L, T, X, Inline joiner blocks, emergency battery packs, dual switching and fusing available.

Labels

UL. cUL and I.B.E.W.

US Patent No. 4,717,993.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • B1008




Page 2 of 2

Lytetube Indirect Lens 2-Light T8 Per 4-Foot Section

COEFFICIENTS OF UTILIZATION % EFFECTIVE CEILING CAVITY REFLECTANCE

Performance and Quick Calculator

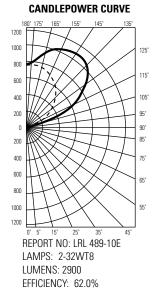

	(CANDL	EPOW	ER	
ZONE Deg.	0	22	45	67	90
180 175 165 155 145 125 115 105 90 85 75 65 55 45 25 15 0	763 758 739 681 601 474 368 221 89 14 0 0 0 0 0 0	763 763 762 814 841 809 690 582 429 236 71 47 28 12 0 0 0 0	763 776 916 942 929 848 796 566 320 99 57 38 25 19 7 3	763 794 970 1015 1045 999 898 616 356 109 67 48 40 29 13 4 3 0 0	763 800 978 1035 1078 1042 885 628 360 109 69 58 42 31 15 5 3 0 0

CANDLEPUWER						
ZONE Deg.	0	22	45	67	90	
180 175 175 185 185 145 135 115 105 90 85 75 65 45 35 25 15 0	763 758 739 681 601 474 368 221 89 14 0 0 0 0 0	763 762 814 841 809 690 582 429 236 71 47 28 12 4 2 0 0 0	763 776 916 942 929 848 796 566 320 99 57 38 25 19 7 3 1 0 0	763 794 970 1015 1045 999 898 616 356 109 67 48 40 29 13 4 3 0 0	763 800 978 1035 1078 1042 885 628 360 109 69 58 42 31 15 5 3 0 0	
ZONAL LUMEN SUMMARY						
ZONE	LUM	ENS % E	BARELAMP	% LUN	/INAIRE	
0-90		91	1.6		2.5	

62 N

100.0


% WALL REFLECTANCE 10 50 10 10 59 59 51 35 49 47 51 42 40 30 29 28 44 41 38 38 35 33 26 25 23 2 3 4 5 6 7 ROOM CAVITY RATIO 39 34 30 27 31 33 30 27 21 19 35 23 23 19 30 26 29 26 22 20 18 16 26 22 26 18 16 14 19 22 19 23 16 16 13 12 24 19 16 21 17 14 14 12 10 8 22 17 19 15 13 12 10 09 14 19 15 12 13 17 11 12 08 09 18 14 10 11 15 12 9

SPACING RATIOS: PARALLEL = 1.3 / PERPENDICULAR = 1.5 ROOM SURFACE REFLECTANCES: 80% CEILING, 50% WALLS, 20% FLOOR RCR = 1 (Rm. Width = 10xMtg. Ht. above work plane) RCR = 5 (Rm. Width = 2xMtg. Ht. above work plane) L FOOTCANDLES RCR = 10 (Rm. Width = Mtg. Ht. above work plane) NITAL AREA PER FIXTURE IN SQUARE FEET CENTER TO CENTER DISTANCE OF FIXTURES IN FEET

Fixture Lengths & Mounting Locations

4-FOOT JOINER	8-FOOT JOINER
├─ 48" (121.92cm) —	96" (243.84cm)


Sample Run





0-180

Dimensions given are both fixture lengths and mounting distances.

Mounting & Joiner Block Accessories








9" (22.86cm) 12" (30.54cm) 18" (45.72cm) 24" (60.96cm)

Chrome Stem RT62 ED12 = 12" OAL RT62 ED18 = 18" OAL RT62 ED24 = 24" OAL


Cable/Cord RT62 EDCC36 (straight cord) RT62 EDCCC36 Add WH for (coiled cord) white stem Max 10 amps.




Cable Assemblies Single Stem C36 (cable only) S12 = 12" OAL CC36 (cable/straight S18 = 18" OAL cord feed) S24 = 24" OAL CCC36 (cable/coiled Add WH for cord feed) white stem



RT62-LD





Inline joiner block available: RT62ILD

Ordering Instructions

Individual Fixtures:

- 1. Order number of JOINER FIXTURES.
- 2. Order one POWER FEED END SET per fixture.
- 3. Order one SINGLE STEM or CABLE ASSEMBLY per JOINER FIXTURE.

Continuous Rows:

- 1. Determine run length.
- 2. Order the appropriate number of JOINER FIXTURES for the complete run.
- 3. Order one POWER FEED END SET per run.
- 4. Order one SINGLE STEM or CABLE ASSEMBLY per JOINER FIXTURE.
- 5. For cable mounted runs that exceed amperage limits, order the appropriate number of CABLE/CORD FEEDS.

Square/Rectangle Patterns:

- 1. Order appropriate number of JOINER FIXTURES to complete the pattern size.
- 2. Order number and type of JOINER BLOCKS required.
- 3. Order one SINGLE STEM or CABLE ASSEMBLY per JOINER FIXTURE.
- 4. For cable mounted patterns that exceed amperage limits, order the appropriate number of CABLE/CORD FEEDS.

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710 We reserve the right to change details of design, materials and finish. www.lightolier.com © 2008 Philips Group • B1008

