QUEST 2000





FEATURES:


 Serves a wide variety of cold beverages including coffees, lattes and teas

Cornelius.

- Large 8 lb ice bank provides exceptional cooling during peak demand periods
- Patented mixing system delivers consistent quality finished drinks
- Narrow 10.4" footprint conserves counter space
- State-of-the-art lighted merchandiser promotes impulse sales and brand recognition

- Contemporary styling is a combination of attractive gray plastic and sturdy stainless steel
- Modular component design simplifies service and sanitation
- Push button or portion control dispensing is available

CG5088-1008 COFFEE

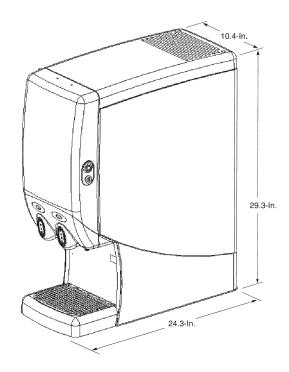

PART NUMBER	DESCRIPTION
721542182	Quest 2 Flavor Push Button 115 V / 60 Hz with cold coffee graphics
729011004	Extended Panel Kit for Tall Cups
729011153	Cup Locator

TECHNICAL SPECIFICATIONS:

CONCENTRATE STORAGE. 2 - 3.5 L bottles

DESCRIPTION	. 115 volts, 60 Hz	WATER SUPPLY	
	230 volts, 50 Hz	REQUIREMENTS	.50 psi (3.4 bar)
REFRIGERATION	Hermetically sealed		recommended dynamic
	system, R-134a	OPERATING PRESSURE	80 psi (5.15 bar):
	refrigerant 6.2 oz (175 g)		Max static pressure
ICE BANK	. 8 lb		20 psi (1.38 bar):
CABINETRY	High impact plastic cabinetry with stainless steel front panel		Min dynamic pressure
			(148 mL) @ 75°F (24°C) ambient, 75°F (24°C)
DISPENSER DIMENSIONS	. 29.3"H x 10.4"W x 24.3"D (74.4 cm x 26.4 cm x 61.7 cm)		
			incoming water, and 40°F (4°C) concentrate without
WEIGHT	Dry: 96 lb (43.5 kg)		exceeding a 40°F (4°C)
	Operating: 136 lb (61.7 kg)	FLOW RATE	Adjustable water flow rate
	Shipping: 120 lb (54.4 kg)	. = •	from 1-2.2 oz/sec
RECOMMENDED CLEARANCE	CE Back: 4" (10.16 cm)		Handles 2 + 1 up to
	Top: 12" (30.48 cm)		7 + 1 concentrate
WATER CONNECTION	0.375" (.95 cm) SAE male		CUL)US NSF CE
	flare SAE fitting on dispenser	AGENCY LISTINGS:	LISTED NOT. CE



IN THE U.S.A. OUTSIDE THE U.S.A. Ph: 800.238.3600 Ph: 763.488.8200 Fax: 763.488.4283 Fax: 763.488.4283

101 Broadway Street West Osseo, MN 55369 www.cornelius.com