


The LT Series Thermoplastic LED Exit is a compact exit sign that blends with modern interiors with its softly rounded corners and universal mounting configuration. The LT Series is extremely easy to install, and provides years of low cost, efficient service.

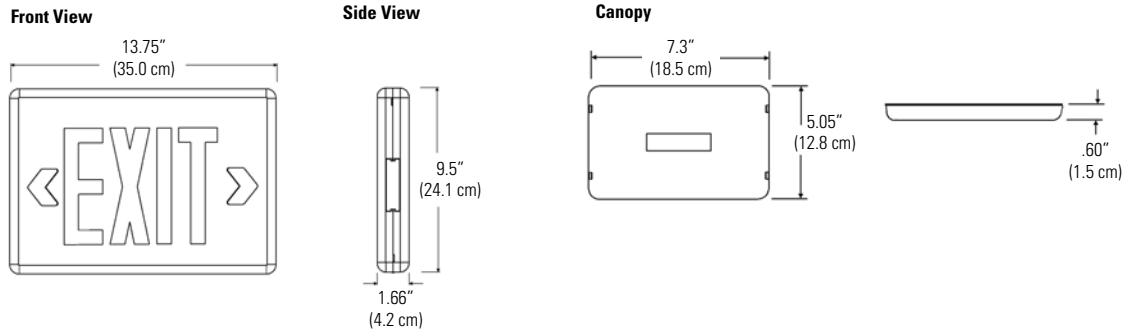

Complete Fixture consists of base exit sign. Select options and accessories below.

How to Specify:

<div style="border: 1px solid black; padding: 2px; width: 30px; margin: 0 auto;">LT</div> <p>SERIES</p> <p>LT = Thermoplastic LED Exit</p>	<div style="border: 1px solid black; width: 30px; height: 15px; margin: 0 auto;"></div> <p>BATTERY</p> <p>N = Nickel Cadmium A = AC Only</p>	<div style="border: 1px solid black; width: 30px; height: 15px; margin: 0 auto;"></div> <p>STENCIL FACES</p> <p>1 = Single 2 = Double U = Universal</p>	<div style="border: 1px solid black; width: 30px; height: 15px; margin: 0 auto;"></div> <p>LETTER COLOR</p> <p>R = Red G = Green</p>	<div style="border: 1px solid black; width: 30px; height: 15px; margin: 0 auto;"></div> <p>STENCIL FACE/ HOUSING COLOR</p> <p>W = White B = Black</p>
---	---	--	---	--

Features

- 1. Illumination:** Illumination is accomplished with long lasting, high output Light Emitting Diodes (LEDs).
- 2. Housing:** Constructed of impact resistant, UL 94 V-0, 5 VA white thermoplastic (black is optional). NFPA-type field selectable chevrons can be installed/removed from outside the exit housing. Housing design simplifies installation, and does not require hard wire terminations inside of the exit housing.
- 3. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 4. Battery:** Maintenance free, sealed nickel cadmium battery has an estimated service life of 10 years, and an operating temperature range of 20°F (-7°C) to 95°F (35°C).
- 5. Input Power Requirements:** AC Only - Red: .89 W; Green: 2.17 W
Emergency Operation - Red: 3.62 W; Green: 2.79 W

Code Compliance

UL 924 listed.

Options

- SD** = Self-Diagnostics
- BZ** = DC Buzzer (Emergency operation only)
- BF** = Buzzer/Flasher (Emergency operation only)
- DL** = UL Damp Location Listing
- ST** = Special Input Transformer (Specify voltage & frequency)
- FA** = 24 VDC Fire Alarm Interface (reg. constant DC voltage)
- FL** = Flasher (Emergency operation only)
- SW** = Special Wording/Graphics (Consult factory)
- 2CKT1** = 120 VAC Two Circuit
- 2CLT2** = 277 VAC Two Circuit

Options (continued)

- DC12** = 12 VDC Remote Emergency Power
 - TP** = Tamperproof Screws (Requires TPTOOL)
 - VRS** = Vandal Resistant Lens
 - LP** = Low Level Matching Thermoplastic Remote Exit
 - LL** = Low Level Institutional Frame Surface Mt. Remote Exit
- Multiple option configurations may void UL listing. Consult factory for specifics.

Accessories

- SPKIT12WH(BK)** = 12" Pendant Kit, White (Black)
- WG4** = Wall Mount Exit Wire Guard
- WG10** = Side Mount Wire Guard
- PCS1** = Polycarbonate Vandal Shield

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • E0308