

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets			
	Incandescent			
	Frame-In Kit	Installation Type	Lamping	Height
2045 Specular Gold	2002P1	Non-IC	60W BT15	6"
2046 Specular Clear	2003R	Non-IC Existing		6"
2046CD Clear Diffuse				

Features

- 1. Deep Reflector:** Hydroformed aluminum, .040 thick (18 ga.); specular clear or gold finish; matte white trim, self flanged.
- 2. Frame-In Kit:** (2002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.


Labels

UL (Suitable for Damp Locations), I.B.E.W.


Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	



Single Unit Ht. to Floor	60W BT15 Footcandles	Beam Dia.
4'	13	5'
6'	6	7'
8'	3	9'

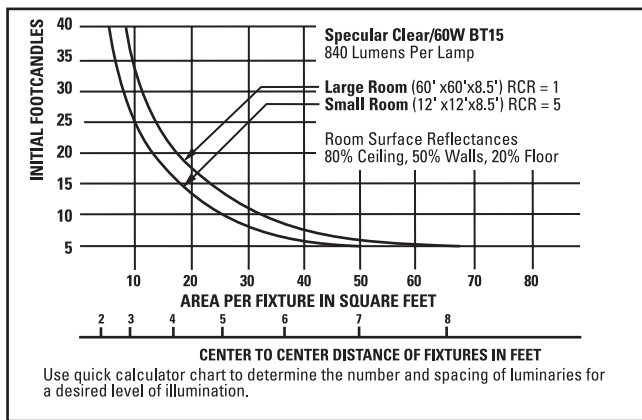

Candlepower Curve

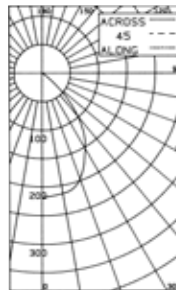

Report 1267FR
Efficiency = 36.0%

DOWNLIGHT SPACING RATIO = 1.2

COEFFICIENTS OF UTILIZATION																	
% EFFECTIVE CEILING CAVITY REFLECTANCE																	
80 70 50 30 10 0																	
% WALL REFLECTANCE																	
50 30 10 50 30 10 50 30 10 50 30 10 50 30 10 0																	
ROOM CAVITY RATIO	0	.43	.43	.43	.42	.42	.42	.40	.40	.40	.38	.38	.38	.37	.37	.37	.36
	1	.40	.39	.39	.39	.39	.38	.38	.37	.37	.37	.36	.36	.35	.35	.35	.34
	2	.37	.36	.35	.37	.36	.35	.36	.35	.34	.35	.34	.33	.34	.33	.32	.32
	3	.35	.33	.32	.34	.33	.32	.33	.32	.31	.33	.32	.31	.32	.31	.30	.30
	4	.33	.31	.29	.32	.30	.29	.31	.30	.29	.31	.29	.28	.30	.29	.28	.27
	5	.30	.28	.27	.30	.28	.27	.29	.28	.26	.29	.27	.26	.28	.27	.26	.25
	6	.28	.26	.25	.28	.26	.24	.27	.26	.24	.27	.25	.24	.26	.25	.24	.23
	7	.26	.24	.22	.26	.24	.22	.25	.24	.22	.25	.23	.22	.25	.23	.22	.21
	8	.24	.22	.21	.24	.22	.20	.24	.22	.20	.23	.22	.20	.23	.21	.20	.20
	9	.23	.20	.19	.22	.20	.19	.22	.20	.19	.22	.20	.19	.21	.20	.18	.18
10	.21	.19	.17	.21	.19	.17	.20	.18	.17	.20	.18	.17	.20	.18	.17	.16	

20% FLOOR CAVITY REFLECTANCE

To convert lighting data for a lower wattage incandescent lamp of the same type, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

Job Information **Type:**

Lightolier a Genlyte company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2006 Genlyte Group LLC • H0906