



FEATURES

- For feeding downlights or exit signs.
- Male (power-in) and female (power-out) configuration.
- Adapter is 2 13/16" x 2 13/16" x 13/16" installed.
- Die cast housing with zinc plated steel cover plate.
- Fixture adapters can be wired for single or multi-level use.
- Thru wired for three circuits.
- Type 6M adapter wires are #18 AWG TFN solid copper conductors, 600 volt.
- Type 7M adapter wires are #12 AWG THHN stranded copper conductors, 600 volt.
- Type 6M and 7M have 6 inch tap leads.
- 1/2" K.O. connector for mounting to fixture.

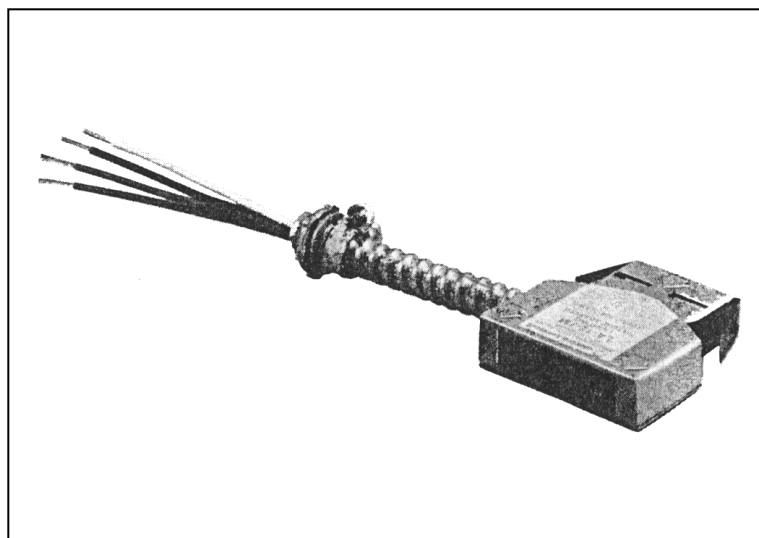


APPLICATION

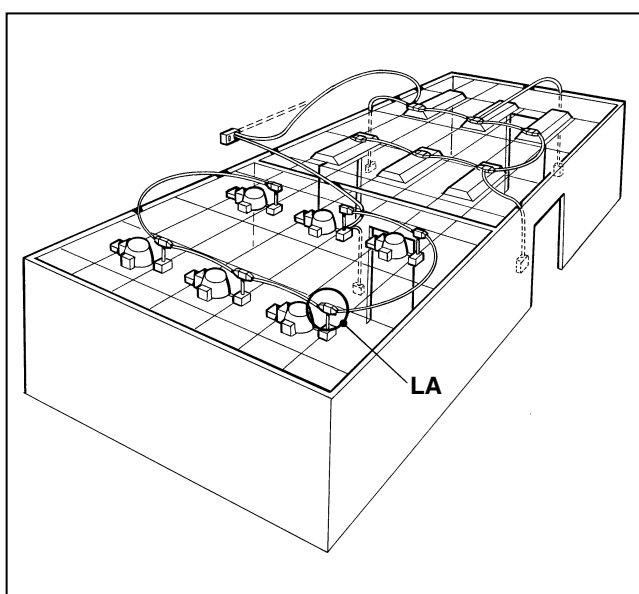

The fixture adapter is the link between the wiring distribution and the fixture ballast(s). It mounts directly to the fixture body in a standard 1/2" K.O. (7/8" diameter). The adapter can be rotated for ease of cable orientation to prevent a strain on the connection.

DIMENSIONS

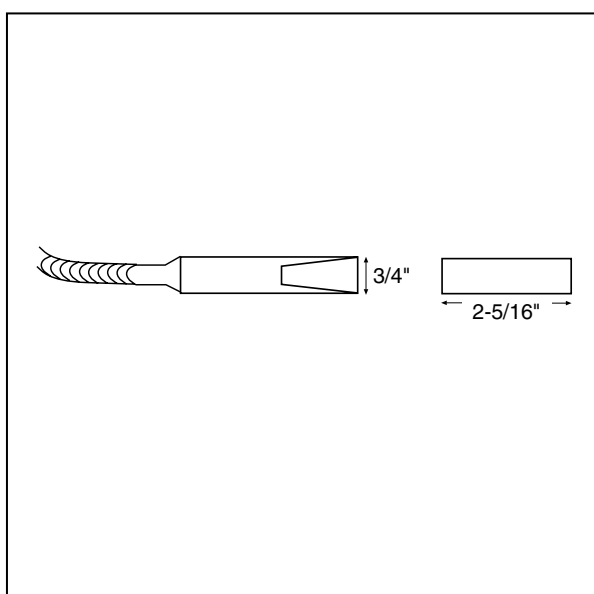

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

Lightolier a Genlyte Thomas Company

www.lightolier.com

Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.


© 2002 Genlyte Thomas Group LLC (Lightolier Division)

A0902

OPTIONS/ACCESSORIES/Folio OA40-17


LIGHTOLIER®

WIRING DIAGRAM

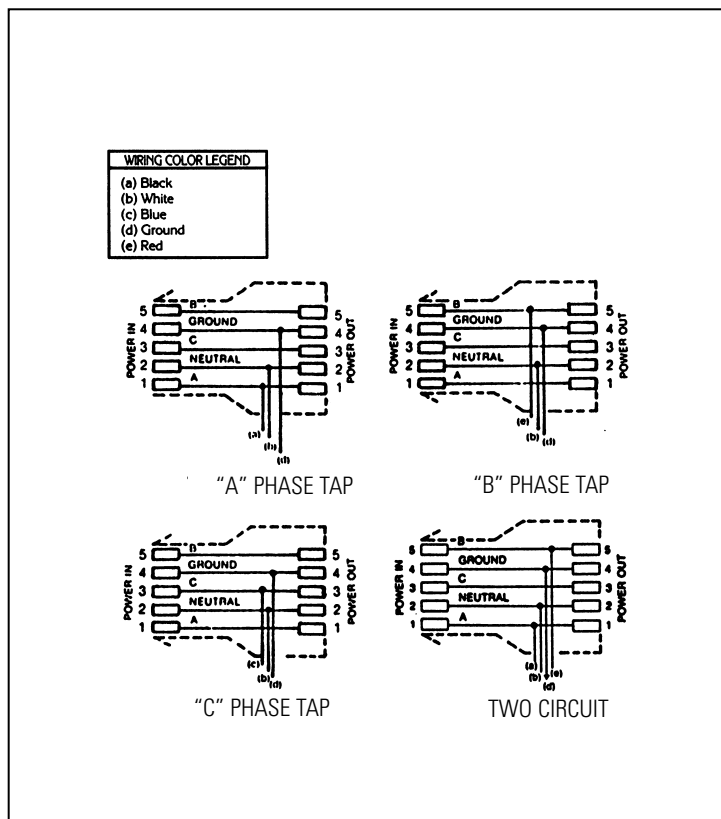

ORDERING INFORMATION

Explanation of Catalog Number. Example: LP-LA-12-6-3

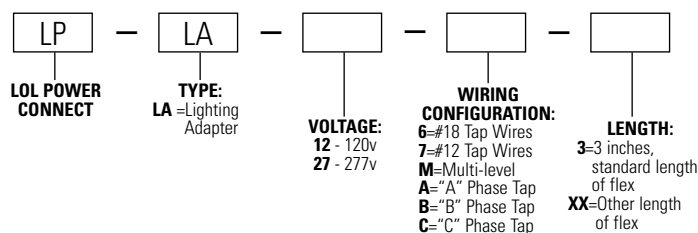

SPECIFICATIONS

- Fixture adapter can be wired for single or multi-level use.
- 1/2" K.O. connector for mounting to fixture.
- Adapter is 2 13/16" x 2 13/16" x 13/16" installed.
- Die-cast housing with zinc plated steel cover plate.
- Thru-wired for three circuits.
- Type 6M adapter wires are #18 AWG TFN solid copper connectors, 600 volt.
- Type 7M adapter wires are #12 AWG THHN stranded copper conductors, 600 volt.
- Type 6M and 7M have 6 inch tap leads.

Job Information **Type:**

Lightolier a Genlyte Thomas Company www.lightolier.com
 Technical Information: (978) 657-7600 • Fax (978) 658-0595
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division)
 A0902 **OPTIONS/ACCESSORIES/Folio OA40-17**

LIGHTOLIER®