



Cordless Impact Wrench

BTW250 1/2" (12.7mm)

BTW251 1/2" (12.7mm)

Satisfy Professional's Needs

14.4V
LITHIUM-ION
3.0Ah

18V
LITHIUM-ION
3.0Ah



230N.m
(2,040in.lbs)

High torque to weight ratio

LITHIUM-ION



Maximum Fastening Torque of 230N.m

Compact
Provides more control and maneuverability.


165mm
(6-1/2")



Phosphorescent Bumper

LED Job Light with Afterglow Function

Light can be turned on before tool starts by pulling the trigger slightly.



Variable Speed Control Function

BTW250: Powered by 3.0Ah Li-ion Battery BL1430




BTW251: Powered by 3.0Ah Li-ion Battery BL1830



Charging time 22minutes with Fast Charger DC18RA



High Power, Compact and Lightweight 4-Pole Motor



Ergonomically Designed Rubberized Grip



Provides comfortable grip and more control while minimizing hand fatigue and pain.

Belt Clip


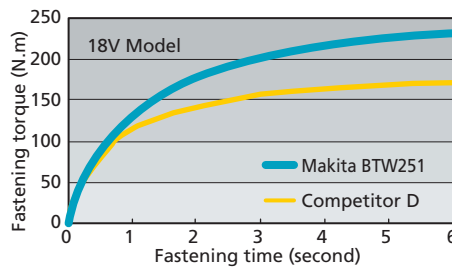


Photo: BTW251

Performance Comparison

The Relation Between Fastening Torque and Fastening Time (when fastening M16 High tensile bolt)

Note: The time axis on the charts below indicates the fastening time after M16 High tensile bolt is seated.

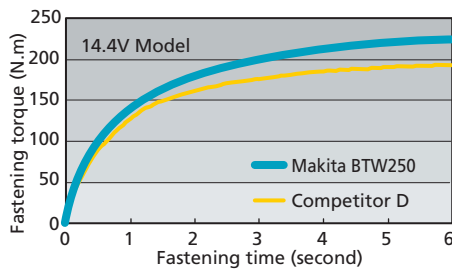

Cordless Impact Wrench

- Variable Speed
- Reversing
- Electric Brake
- Carrying Case
- Built-in Job Light



BTW250 / BTW251 1/2" (12.7mm)

436 mm

Capacity	Standard bolt :	M10 - M16 (3/8" - 5/8")
	High tensile bolt :	M10 - M14 (3/8" - 9/16")
Impacts per minute		0-3,200bpm
No load speed		0-2,200rpm (BTW250)
		0-2,100rpm (BTW251)
Max. fastening torque		230N.m (2040in.lbs.)
Dimensions (L x W x H)		165 x 79 x 234
		(6-1/2" x 3-1/8" x 9-1/4")
Net weight		1.6kg (3.5lbs) (BTW250)
		1.7kg (3.7lbs) (BTW251)
Voltage		14.4V (BTW250)
		18V (BTW251)

Standard Equipment

Fast Charger, Battery Cartridge (Tool does not come with socket)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23258-2 2006-11