


READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE PROCEEDING.
RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at electrical panel before proceeding.

DO NOT INSTALL THIS SYSTEM IN A WET OR DAMP LOCATION.
DO NOT ENERGIZE ANYTHING OTHER THAN THE FIXTURES IN THE SYSTEM.
DO NOT OVERLOAD FEED CABLE, 10 AMP MAX FOR SJT 18-3 AND 7 AMP MAX FOR SJT 18-4 & 18-5.

CONTRACTOR IS RESPONSIBLE FOR ADEQUATELY REINFORCING CEILING TO SUPPORT FIXTURE WEIGHT.

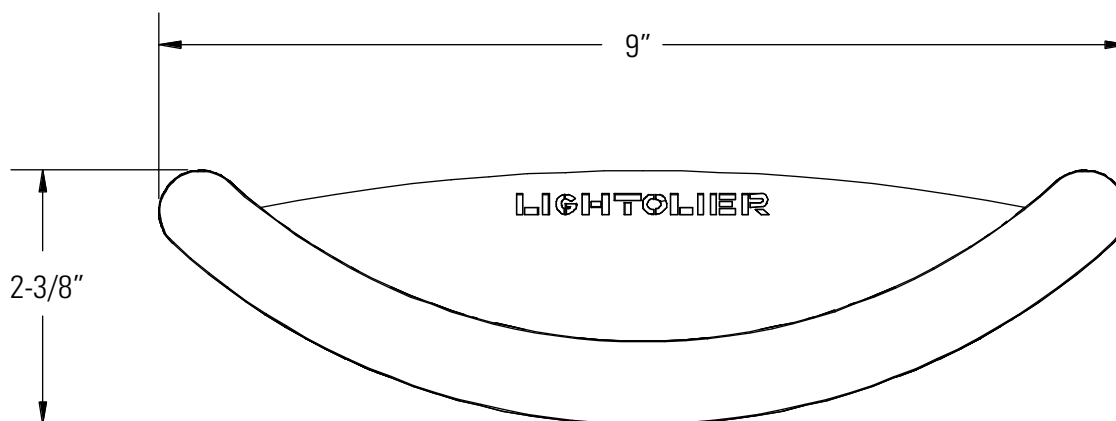

Tools Required:

- 1/4" or 3/8" socket wrench.
- Socket size 11/32" and 1/4"

TABLE OF CONTENTS

SAMPLE PART LIST 3

SAMPLE RUNS..... 4

PHASE 1 - MAKING THE STARTER FIXTURE 5

PHASE 2 - MAKING THE INTERMEDIATE FIXTURE 7

PHASE 3 - MAKING END OF RUN FIXTURE..... 8


CANOPY DETAIL - SLOT TEE 9

CANOPY DETAIL - STANDARD 1" TEE..... 10



CANOPY DETAIL - JUNCTION BOX..... 11

SAMPLE PART LIST

LSC 4' 2-Light

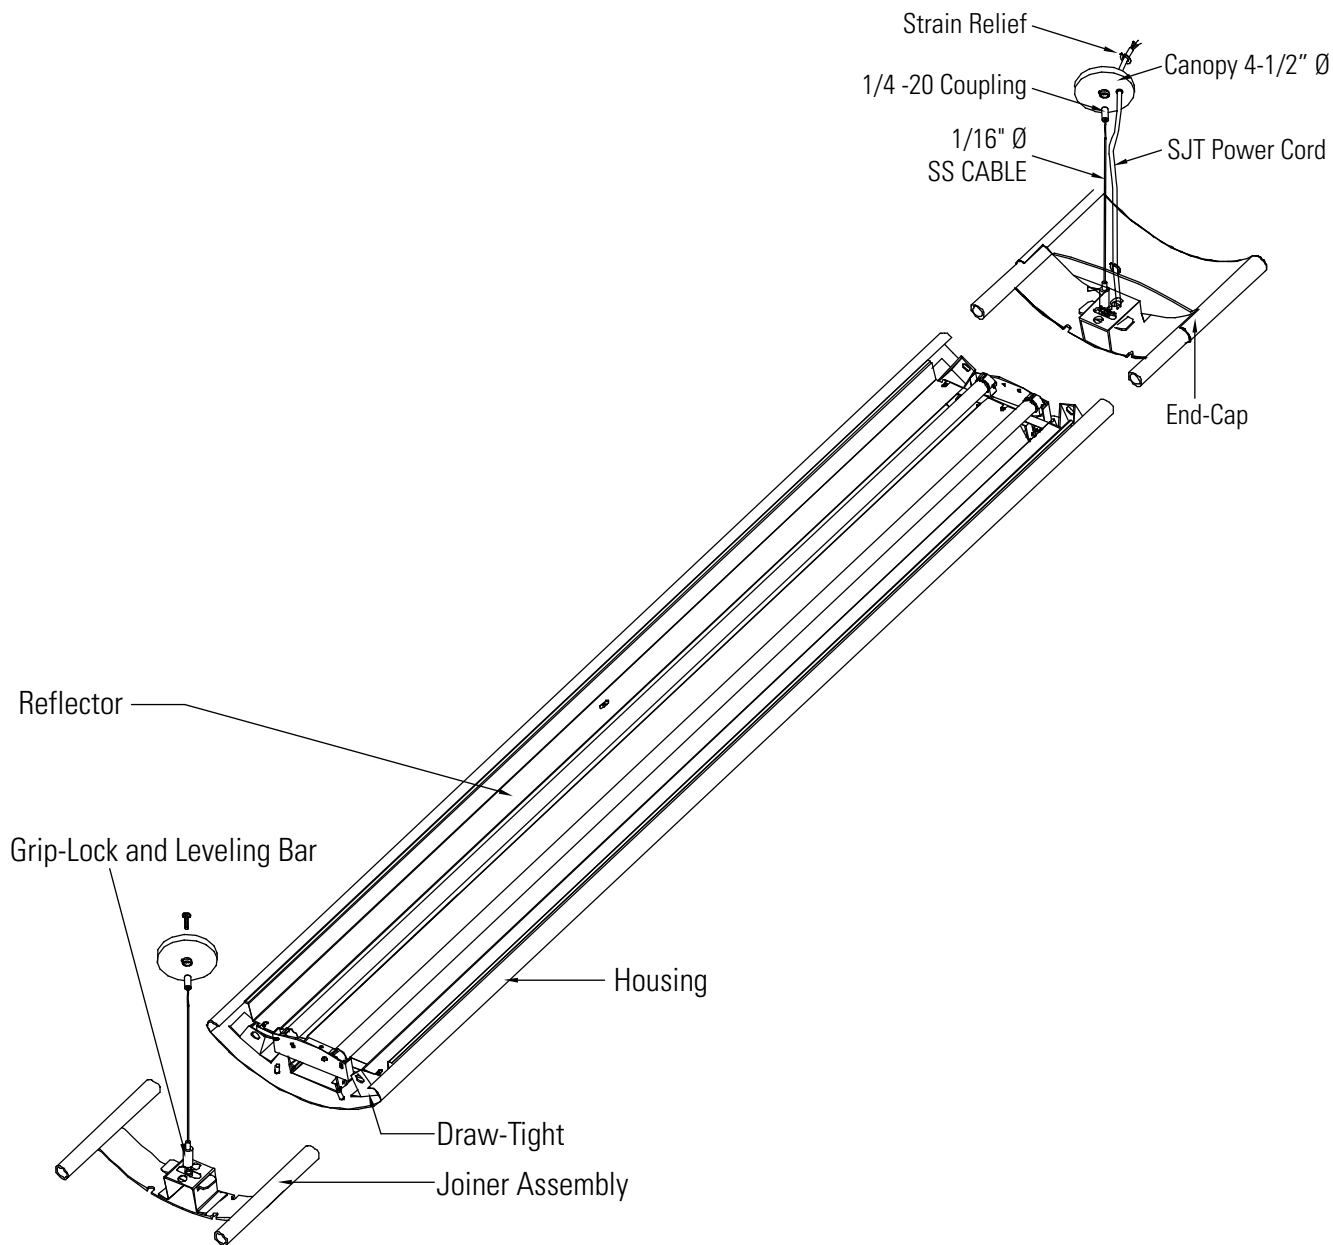

SAMPLE RUNS

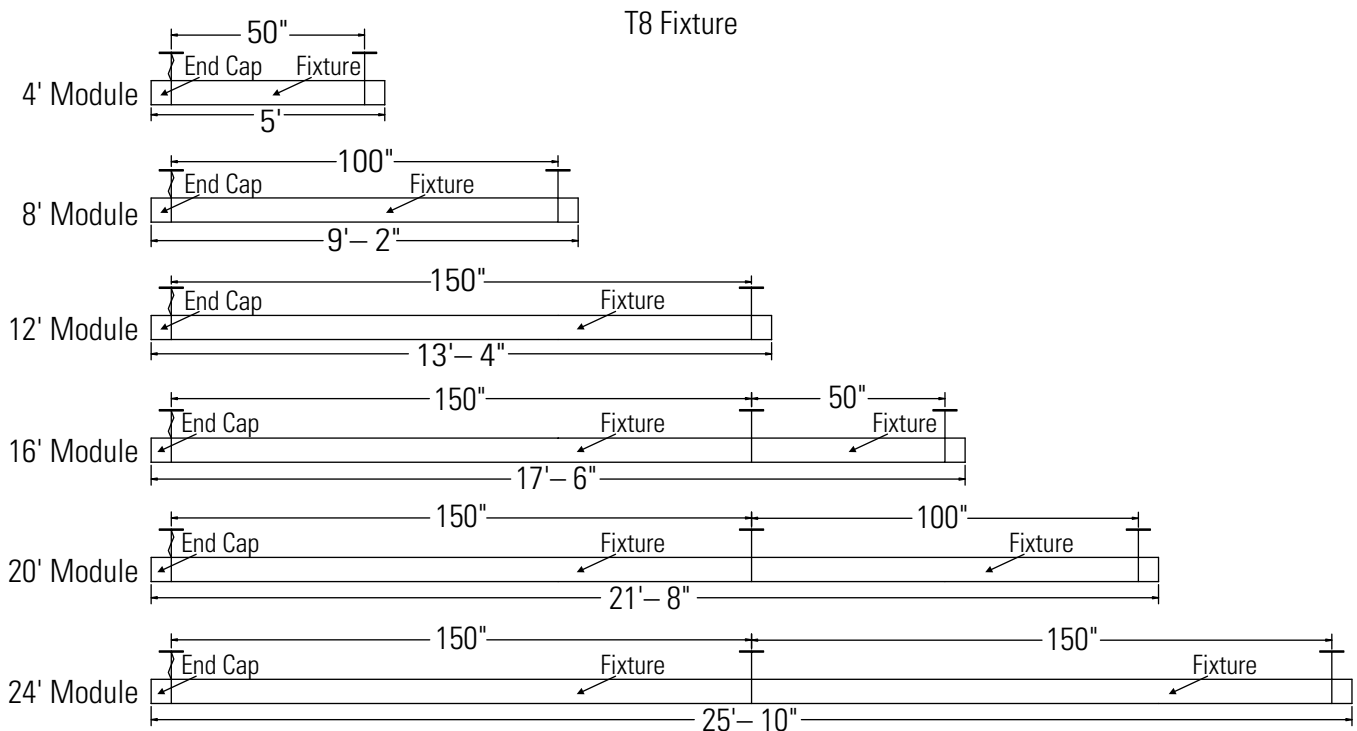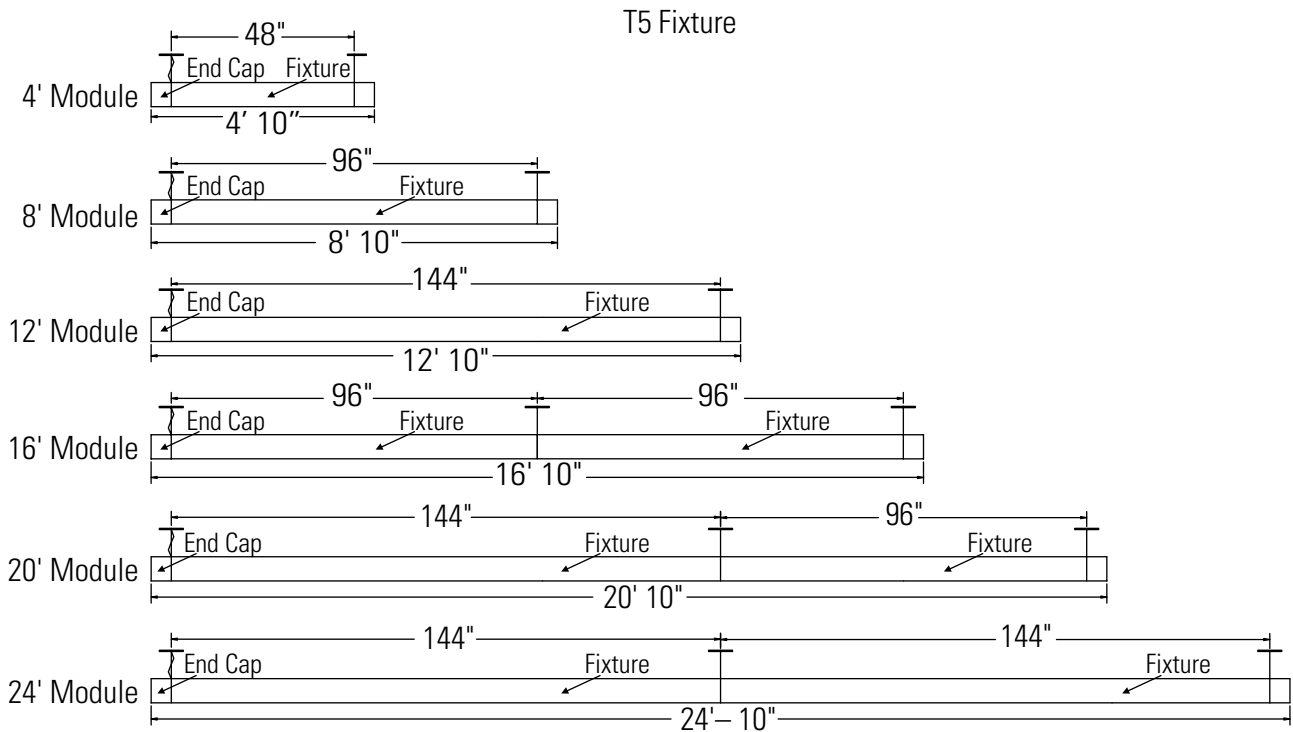

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B0608

PHASE 1 - MAKING THE STARTER FIXTURE

1. Install hanging systems; see appropriate instruction sheet on page 9, 10, and 11 for instructions. On one end of the fixture connect the quick-connects and install the end cap. Slide the end cap on until the weld-studs are flush with the inside of the weld-stud receivers. Then tighten the nuts on the weld-studs with a 11/32" socket. (Fig. 1) While supporting the fixture, depress the nipple at the top of the cable gripper mechanism. This will allow the fixture to be moved up or down on the cable. By releasing the pressure on the nipple the gripper will then hold the cable in position. Be sure not to over tighten because dimpling could occur on opposite side of housing.

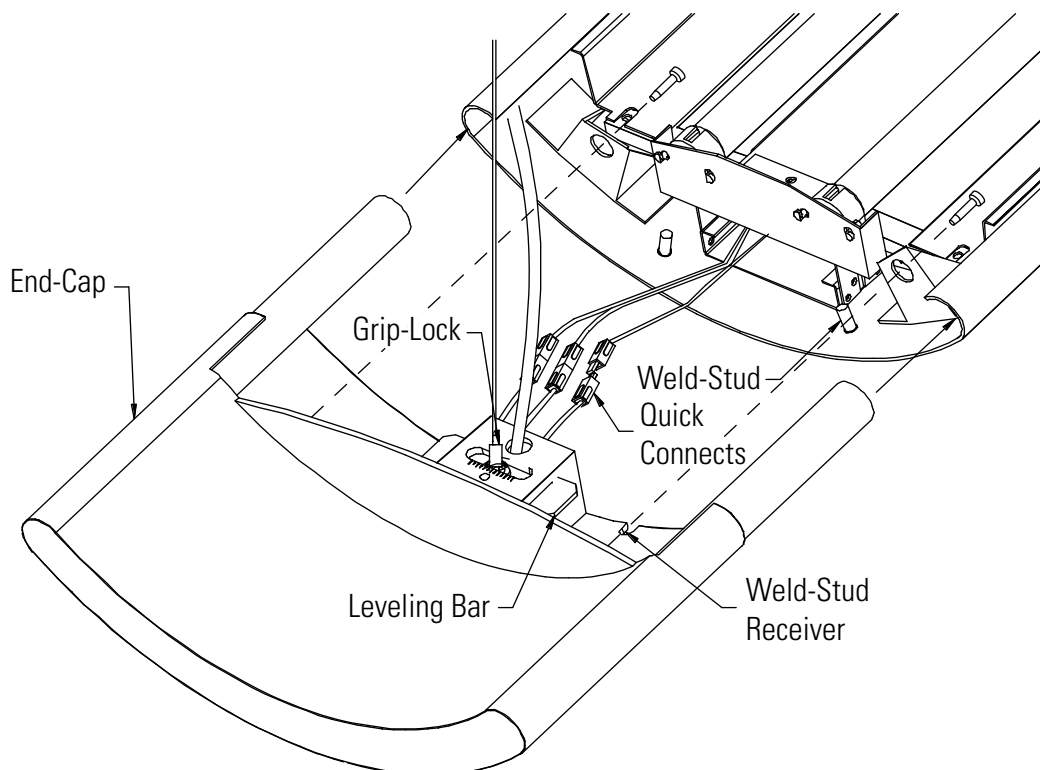


Figure 1

PHASE 1 - MAKING THE STARTER FIXTURE (CONT'D)

- On the opposite end of the fixture install the joiner assembly. First Slide the joiner assembly on until the weld-studs are flush inside the weld-stud receivers. Tighten the nuts on the weld-studs with a 11/32" socket. (Fig. 2) Do not over tighten.

Note: Joiner fixtures only. For individual fixtures, proceed to Phase 3.

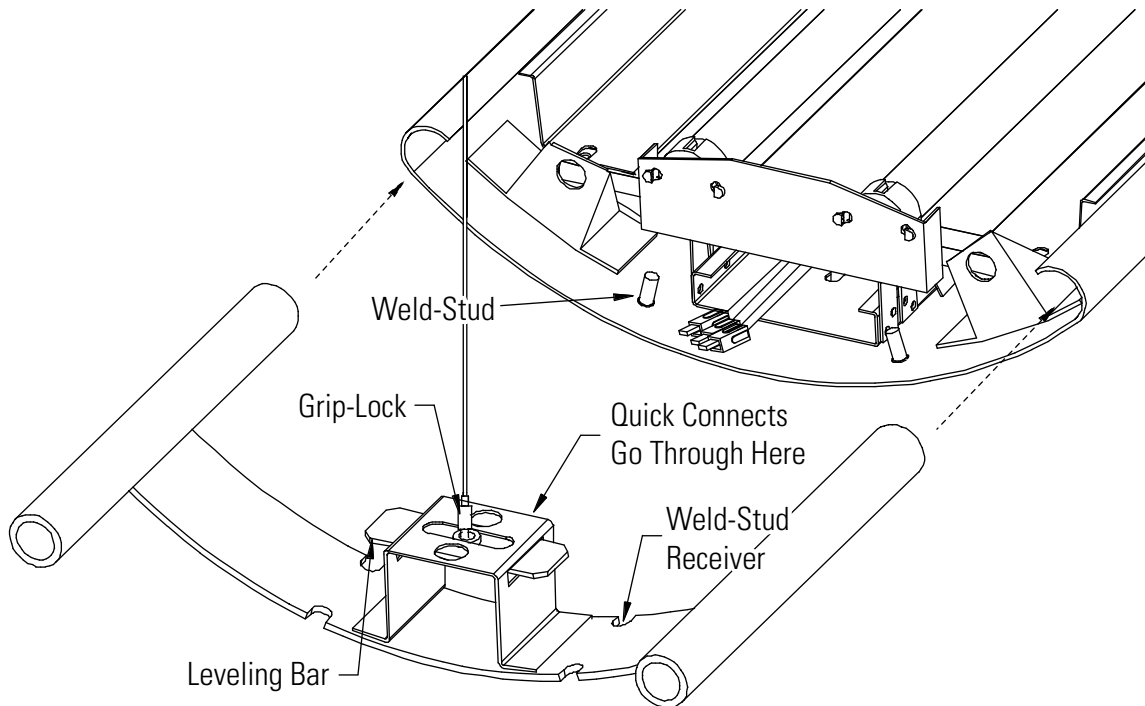


Figure 2

PHASE 2 - MAKING THE INTERMEDIATE FIXTURE

Note: If fixture is an individual, skip Phase 2 and go to Phase 3.

1. To make the intermediate fixture, install a joiner assembly to one end of a modular fixture the same way as it was installed on the starter fixture.
See step 2. of Phase 1. (Fig. 2)
2. Insert opposite end of the fixture to the starter fixture from Phase 1. Then tighten the Draw-Tight bolt, using a 1/4" socket, to pull the two fixtures together. (Fig. 3)

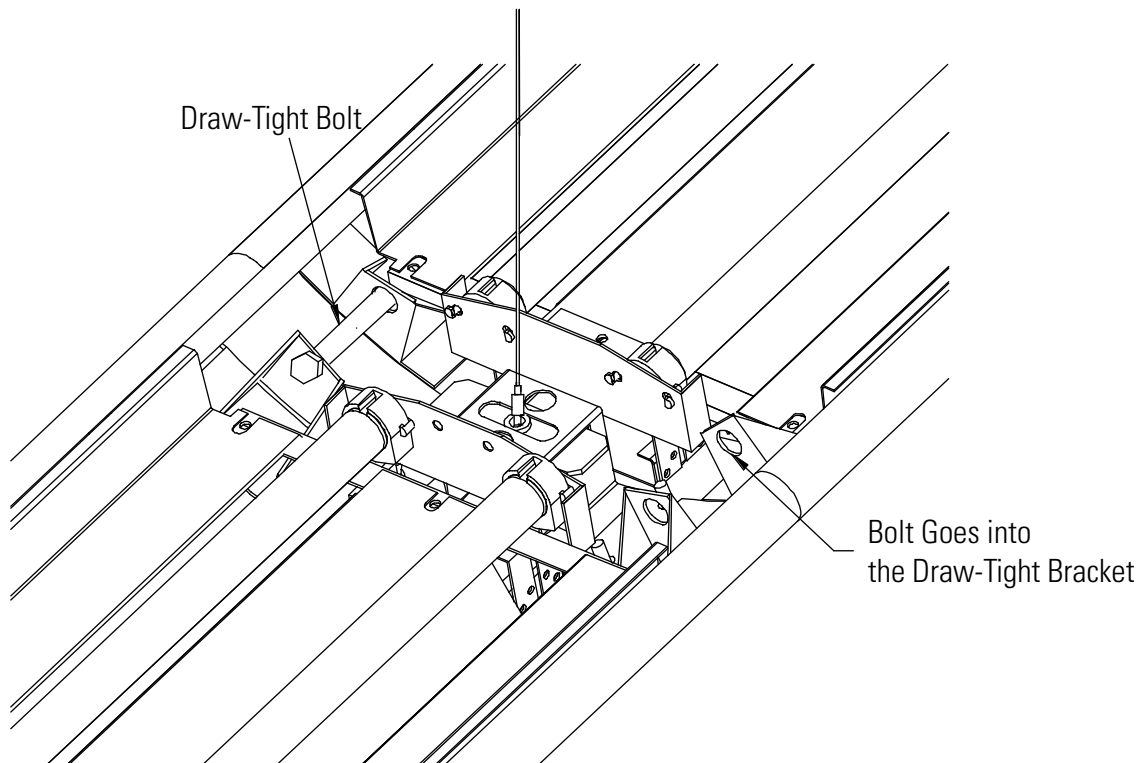


Figure 3

PHASE 3 - MAKING END OF RUN FIXTURE

1. Install second end cap from end set on to end of fixture. Tighten weld-stud nuts from Phase 1- step 1.
2. Place level on fixture run. If run is not level widthwise, loosen screw holding leveling bar, and loosen grip-lock by rotating counter-clockwise. Level run and retighten grip-lock to hold desired position. While supporting the fixture, depress the nipple at the top of the cable gripper mechanism. This will allow the fixture to be moved up or down on the cable. By releasing the pressure on the nipple the gripper will then hold the cable in position.



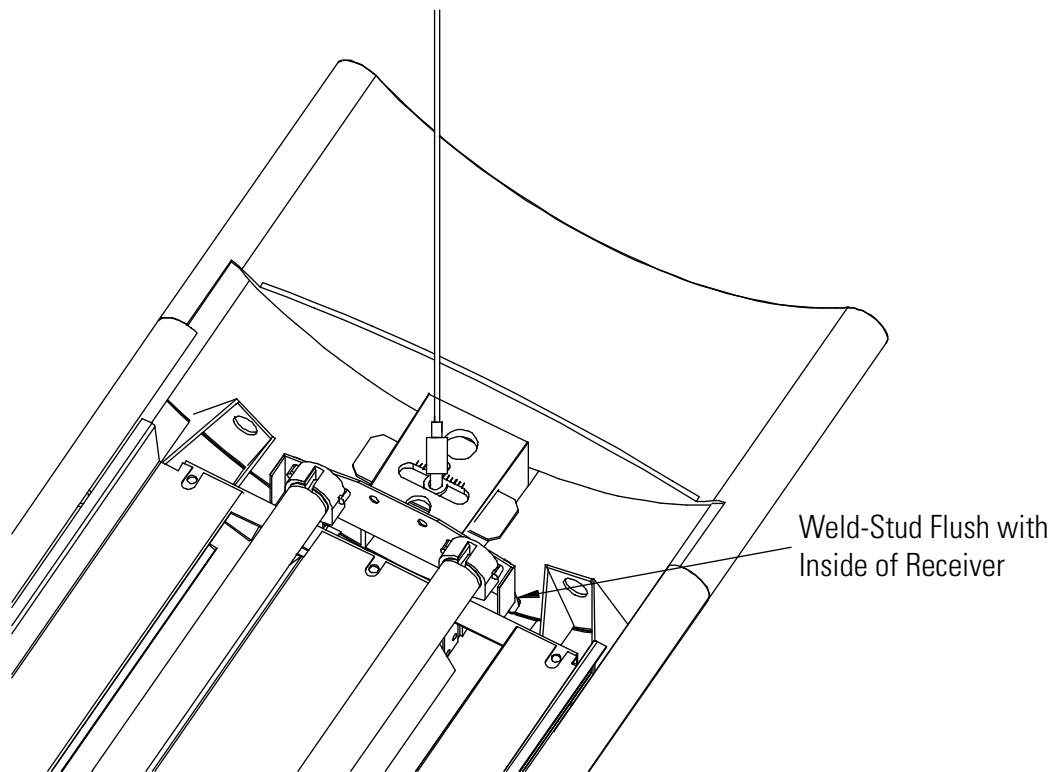


Figure 4

CANOPY DETAIL - SLOT TEE

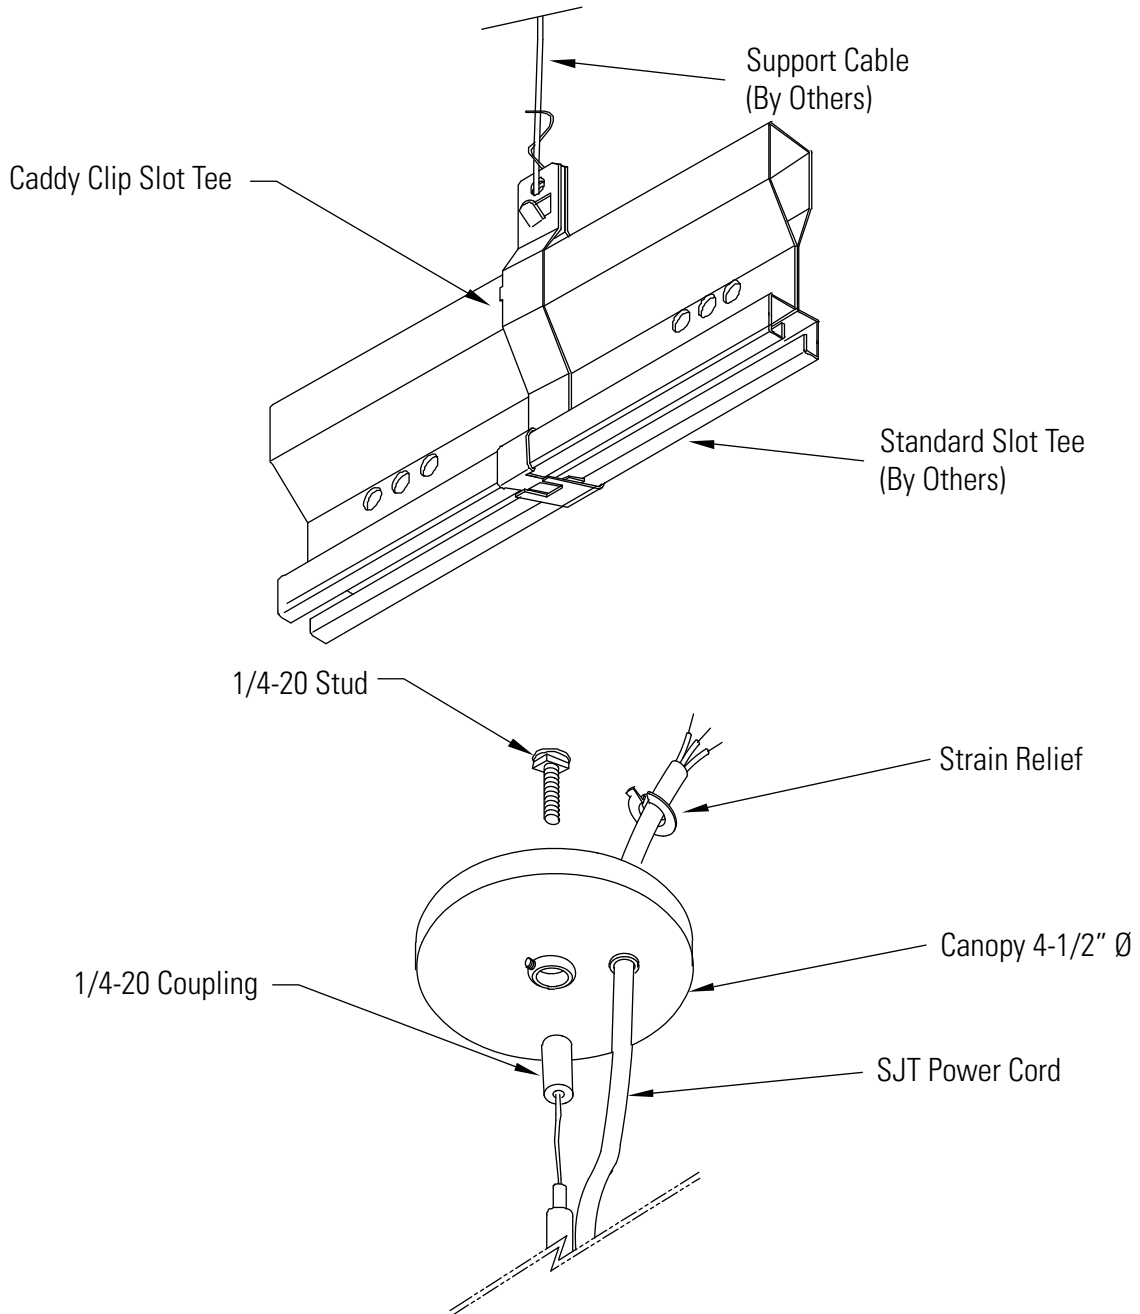

CANOPY DETAIL - STANDARD 1" TEE

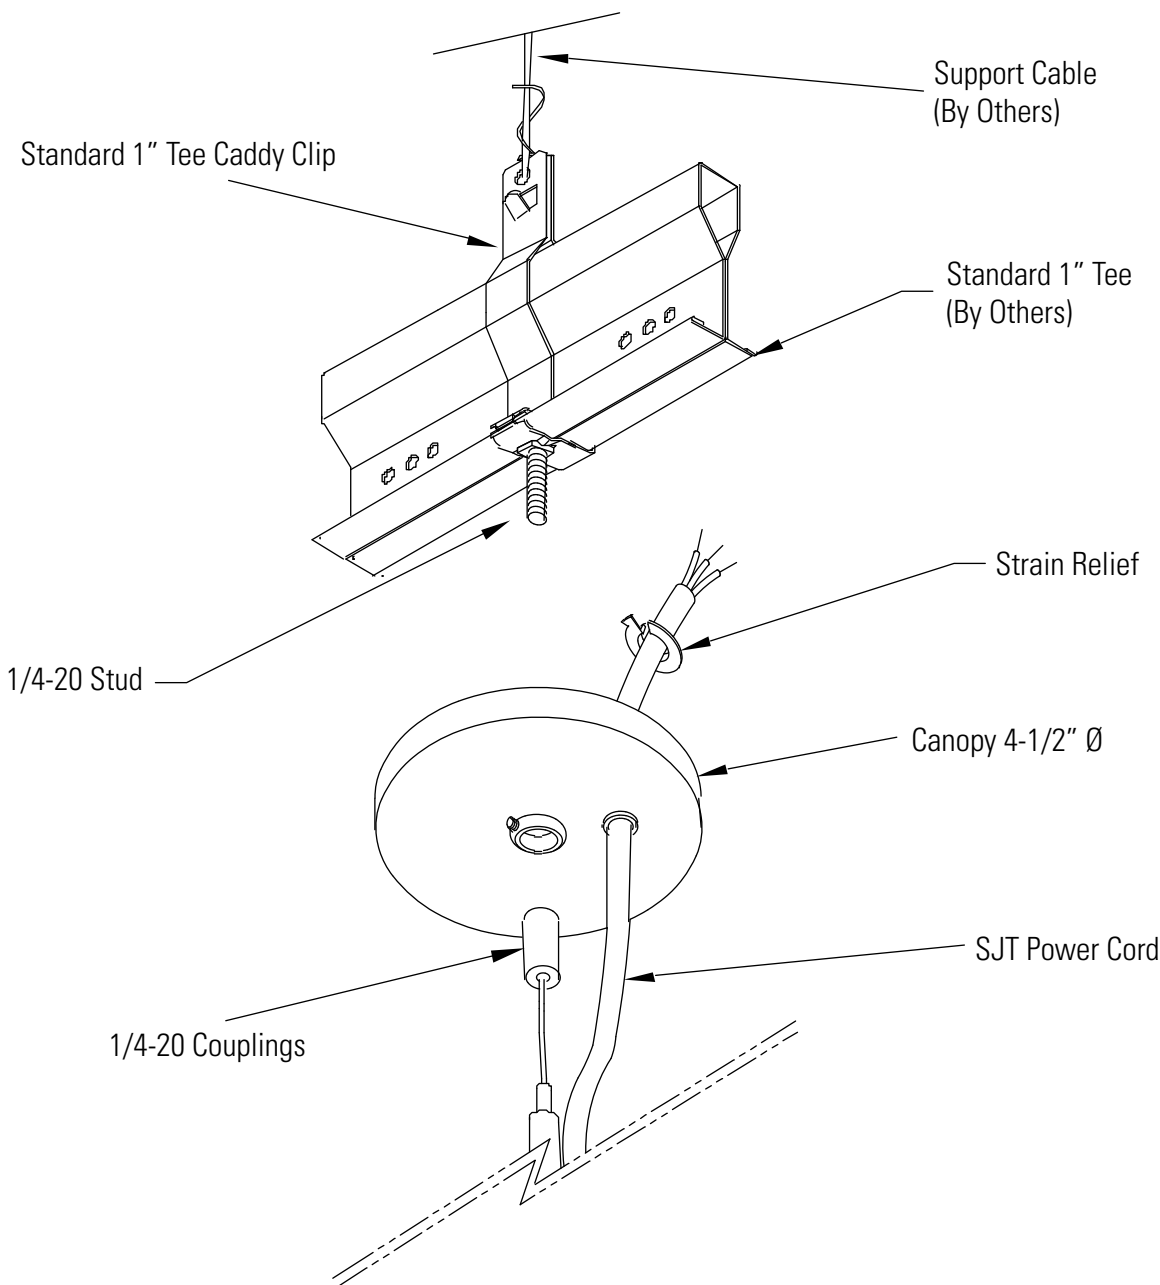

CANOPY DETAIL - JUNCTION BOX

