

Combat[®] UHA - Series

Axial Fan Tubular Unit Heaters



◀ UHA Models 30 - 125

UHA Models 150 - 400 ▶



- Reliable ignition with direct spark ignition burners.
- Minimize summer heat build-up with remote fan operation.
- Longer life and less maintenance with optional stainless steel heat exchangers.
- Variable air throw direction with adjustable horizontal louvers and optional adjustable vertical louvers.

- Reduce dirt build-up on burners and extend life of heat exchanger with separated combustion units.
- Installation and operation flexibility with rear or top air and flue connections (Models UHA 30 - 125 only).
- Ideal for smaller spaces with low profile design (Models UHA 30 - 125 only).

1.800.828.7450

Quality in Any Language™




Combat® UHA 30 - UHA 125 Clearance and Dimension Data

Clearances to Combustibles - Low Profile UHA Range (Models 30 - 125)

| Above Heater | Below Heater | To Side of Heater | To Rear of Heater | To Front of Heater | Access Side Door | To Flue |
|--------------|--------------|-------------------|-----------------------|--------------------|----------------------|---------|
| 1" | 0" | 1" | 18" Airflow Clearance | 118" | 18" Access Clearance | 2" |

Dimension Data - Low-Profile UHA Range (Models 30 - 125)

| Model | | 30 | 45 | 60 | 75 | 100 | 125 |
|--------------------------------------------|------|-----|-----|-------|-------|-----|-----|
| 'A' Height | [in] | 12 | 12 | 17.75 | 17.75 | 23 | 23 |
| 'C' Center of Flue [Top Option] | [in] | 5.2 | 5.2 | 5.2 | 5.2 | 6.9 | 6.9 |
| 'D' Center of Flue | [in] | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 |
| Recommended Mounting Height to Heater Base | [ft] | 10 | 10 | 12 | 12 | 20 | 20 |

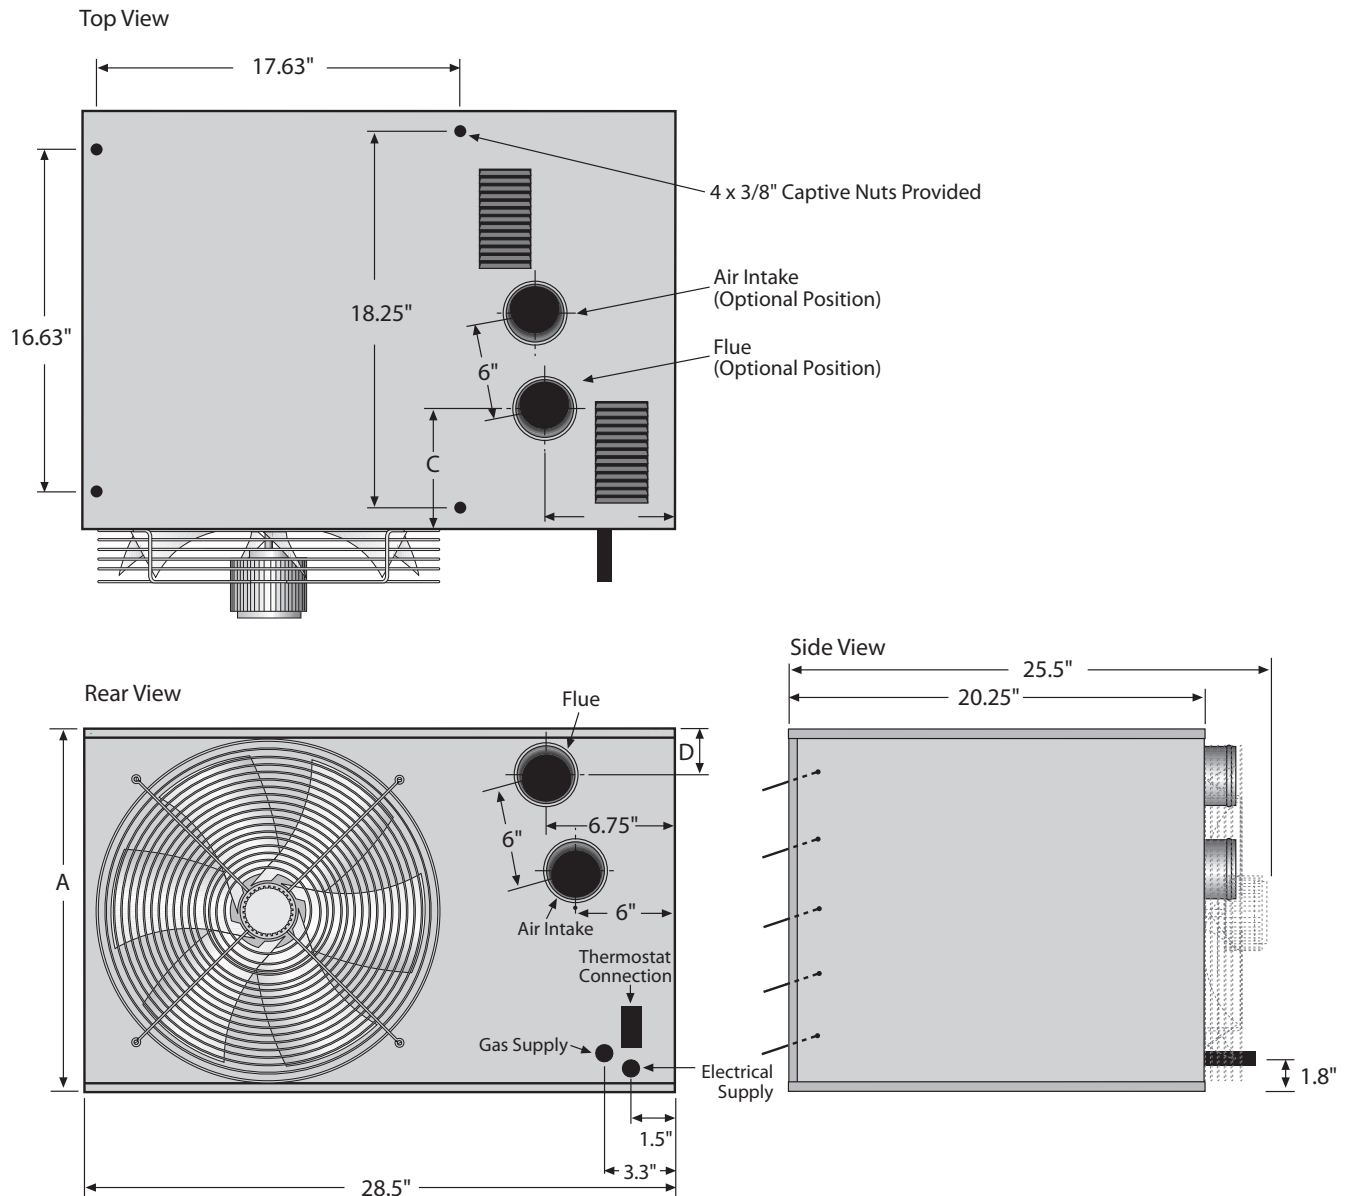


Combat® UHA 150 - UHA 400 Clearance and Dimension Data

Clearances to Combustibles - Standard UHA Range (Models 150 - 400)

| Above Heater | Below Heater | To Side of Heater | To Rear of Heater | To Front of Heater | Access Side Door | To Flue |
|--------------|--------------|-------------------|-----------------------|--------------------|----------------------|---------|
| 6" | 3" | 6" | 24" Airflow Clearance | 118" | 31" Access Clearance | 2" |

Dimension Data - Standard UHA Range (Models 150 - 400)

| Model | | 150 | 175 | 200 | 225 | 250 | 300 | 350 | 400 |
|----------------------------------------------------|------|------|------|-------|-------|-------|------|------|------|
| 'A' Width | [in] | 43 | 43 | 43 | 43 | 43 | 50 | 50 | 50 |
| 'B' Height | [in] | 27 | 27 | 35.25 | 35.25 | 35.25 | 43.5 | 43.5 | 43.5 |
| 'C' Depth | [in] | 30 | 30 | 32 | 32 | 32 | 30 | 30 | 30 |
| 'D' Support Spacing | [in] | 17.6 | 17.6 | 17.6 | 17.6 | 17.6 | 24.7 | 24.7 | 24.7 |
| 'F' Center of Flue | [in] | 9.5 | 9.5 | 17 | 17 | 17 | 13.6 | 13.6 | 13.6 |
| 'G' Flue Center to Air Intake Center | [in] | 6 | 6 | 6 | 6 | 6 | 7 | 7 | 7 |
| 'H' Position of Flue | [in] | 4.5 | 4.5 | 4.75 | 4.75 | 4.75 | 4.9 | 4.9 | 4.9 |
| 'J' Gas Inlet Position | [in] | 5.9 | 5.9 | 5.9 | 5.9 | 5.9 | 8.7 | 8.7 | 8.7 |
| 'K' Electrical Supply Position | [in] | 3.4 | 3.4 | 3.4 | 3.4 | 3.4 | 6.2 | 6.2 | 6.2 |
| Maximum Recommended Mounting Height to Heater Base | [ft] | 20 | 20 | 25 | 25 | 25 | 30 | 30 | 30 |

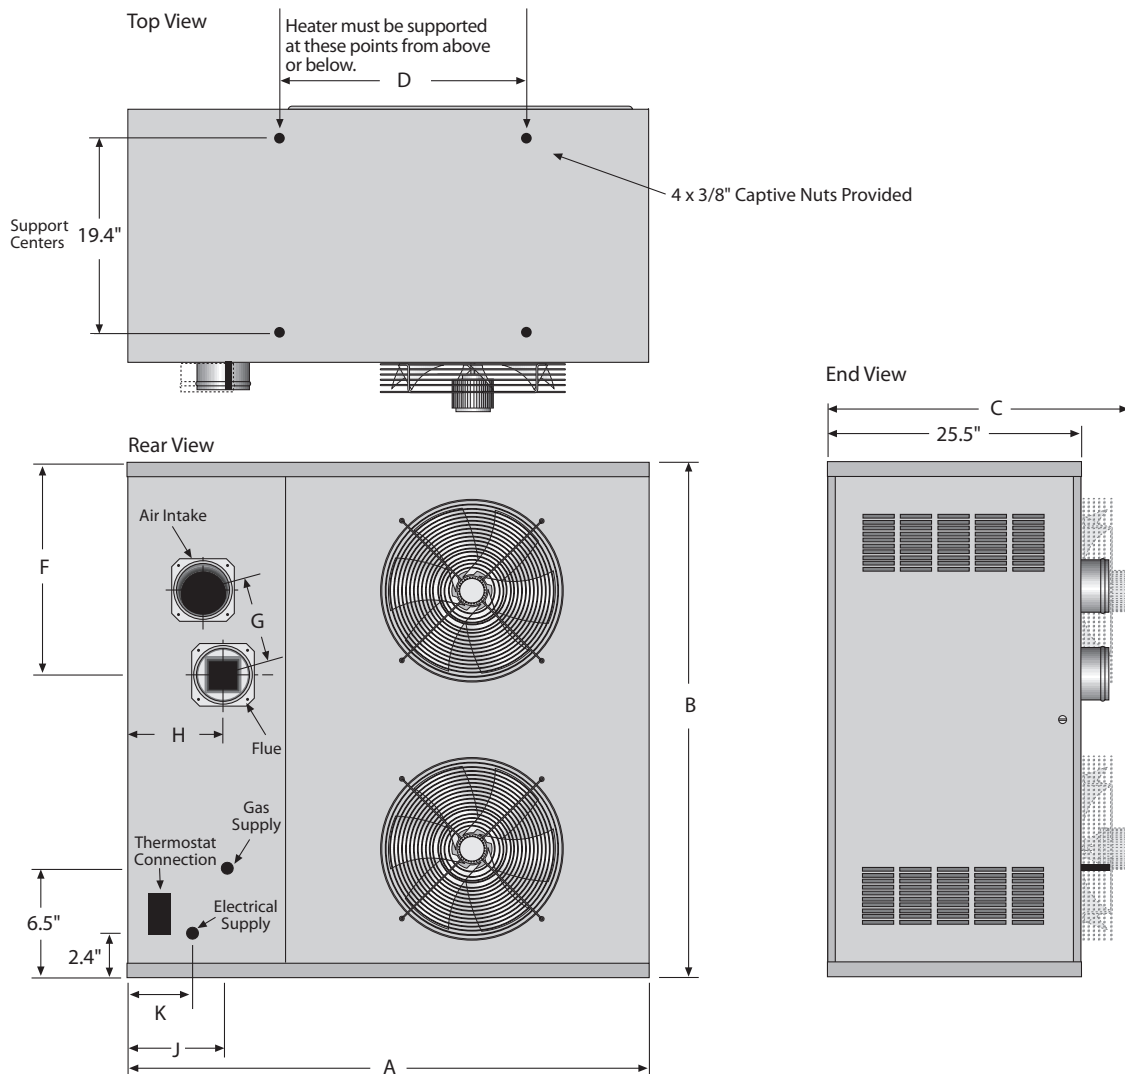

Combat® UHA-Series Technical Data

| Model | | 30 | 45 | 60 | 75 | 100 | 125 | 150 | 175 | 200 | 225 | 250 | 300 | 350 | 400 |
|-------------------------------------|-------------------------------------------------------------|------------------------------------------------------|------|------|------|------|-------|------|-------|------|-------|------|------|-------|-------|
| Total Input | [Btu/h] x [1000] | 30 | 45 | 60 | 75 | 100 | 125 | 150 | 175 | 200 | 225 | 250 | 300 | 350 | 385 |
| Total Output | [Btu/h] x [1000] | 24.6 | 36.9 | 49.2 | 61.5 | 82 | 102.5 | 123 | 143.5 | 164 | 184.5 | 205 | 246 | 288.6 | 315.7 |
| Efficiency | | 82% - All Models | | | | | | | | | | | | | |
| Number of Burners | | 2 | 3 | 4 | 5 | 6 | 7 | 7 | 8 | 9 | 10 | 11 | 12 | 14 | 14 |
| Gas Connection | [in] | 3/8 | 3/8 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 1/2 | 3/4 | 3/4 | 3/4 | 3/4 | 3/4 |
| Inlet Pressure | [in wc] NG Min. LPG Propane Min. NG & LP Propane Max. | 5 - All Models 12 - All Models 14 - All Models | | | | | | | | | | | | | |
| Electrical Supply | | 115 V / 60 Hz / 1 Ø - All Models | | | | | | | | | | | | | |
| Full Load Amps @ 115 V | | 3.0 | 3.0 | 4.1 | 4.1 | 5.8 | 5.8 | 7.1 | 7.1 | 10.6 | 10.6 | 10.6 | 11.6 | 11.6 | 11.6 |
| Air Volume | [CFM] | 691 | 691 | 1376 | 1376 | 1902 | 1902 | 2245 | 2245 | 3716 | 3716 | 3716 | 4663 | 4663 | 4663 |
| Recommended Maximum Mounting Height | [ft] | 12 | 12 | 15 | 15 | 20 | 20 | 20 | 20 | 25 | 25 | 25 | 30 | 30 | 30 |
| Number of Axial Fans | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 |
| Axial Fan Diameter | [in] | 10 | 10 | 16 | 16 | 16 | 16 | 16 | 16 | 19.7 | 19.7 | 19.7 | 16 | 16 | 16 |
| Horsepower | | .06 | .06 | .08 | .08 | .2 | .2 | .2 | .2 | .3 | .3 | .3 | .4 | .4 | .4 |
| Fan Motor Amps @ 115 V | | 1.8 | 1.8 | 2.6 | 2.6 | 4.3 | 4.3 | 4.3 | 4.3 | 4.7 | 4.7 | 4.7 | 8.6 | 8.6 | 8.6 |
| Fan Motor RPM | | 1630 | 1630 | 1030 | 1030 | 1175 | 1175 | 1200 | 1200 | 1085 | 1085 | 1100 | 1155 | 1155 | 1155 |
| Fan Motor Type | | SP | SP | SP | SP | PSC | PSC | PSC | PSC | PSC | PSC | PSC | PSC | PSC | PSC |
| Flue Size | [in] | 4 - All Models | | | | | | | | | | | | | |
| Combustion Air Size | [in] | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 4 | 5 | 5 | 5 |
| Weight | [lb] | 65 | 70 | 85 | 90 | 105 | 110 | 205 | 225 | 255 | 265 | 270 | 355 | 375 | 375 |

Important Notice

The equipment described in this Data Sheet is suitable for most commercial and industrial heating applications. However, in certain environments, particularly where there is a chlorinated atmosphere (e.g. near degreasing plant or other solvent processes) or a particularly dusty atmosphere, specialist advice should be sought at the design stage. Roberts-Gordon reserves the right to alter product specification details without notice.

Installation Code and Annual Inspections:

All installations and service of ROBERTS GORDON® products must be performed by a contractor qualified in the installation and service of products sold and supplied by Roberts-Gordon and conform to all requirements set forth in the ROBERTS GORDON® manuals and all applicable governmental authorities pertaining to the installation, service and operation of the equipment. To help facilitate optimum performance and safety, Roberts-Gordon recommends that a qualified contractor annually inspect your ROBERTS GORDON® products and perform service where necessary, using only replacement parts sold and supplied by Roberts-Gordon, LLC.

Further Information: Applications, engineering and detailed guidance on systems design, installation and product performance is available through ROBERTS GORDON® representatives. Please contact us for any further information you may require, including the Installation, Operation and Service Manual.

This product is not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgement.

Roberts-Gordon, LLC

1250 William Street
P.O. Box 44
Buffalo, NY 14240-0044 USA
Telephone: 716.852.4400
Fax: 716.852.0854
Toll Free: 800.828.7450

www.rg-inc.com

European Office:

Roberts Gordon Europe Limited
Telephone: +44(0) 1902 494425
Fax: +44(0) 1902 403200

© 2006 Roberts-Gordon, LLC All rights reserved. No part of this work covered by the copyrights herein may be reproduced or copied in any form or by any means – graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems – without written permission of Roberts-Gordon, LLC.