


### Overview

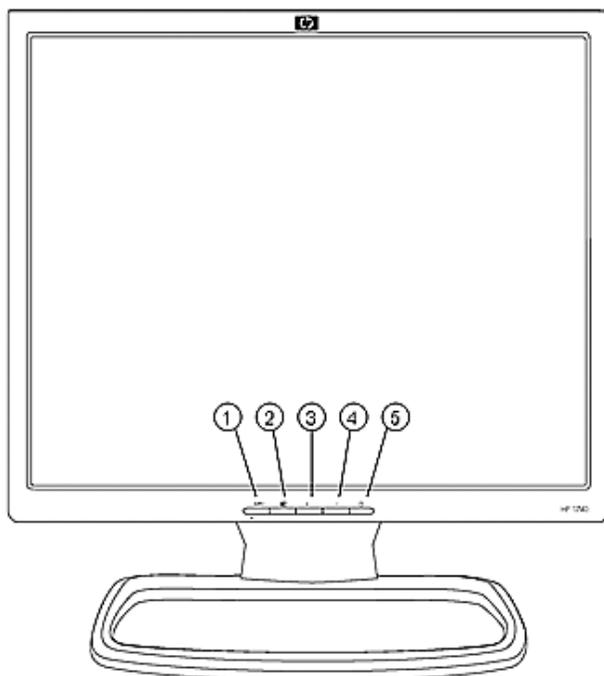

- |                                |                                |
|--------------------------------|--------------------------------|
| 1. Auto Adjust                 | 4. OSD Navigation/Input Select |
| 2. Menu/Select                 | 5. Power                       |
| 3. OSD Navigation/Input Select |                                |

### Models

Part Number: PL766AA#ABA

### HP Care Pack Services

|  |         |
|--|---------|
| Next Day Onsite Response, 3 years          | H2754E  |
| Next Day Onsite Response, 4 years          | U7934E  |
| Next Day Onsite Response, 5 years          | U7935E  |
| Basic 8-5, 4 Hour Onsite Response, 3 years | U8317E  |
| Basic 8-5, 4 Hour Onsite Response, 4 years | U8318E  |
| Basic 8-5, 4 Hour Onsite Response, 5 years | U8319E  |
| Post Warranty Service, Next Day Onsite     | U4925PE |

**NOTE:** For additional information on HP Care Pack Services, please see <http://www.hp.ca/hps/carepack/>.

### Technical Specifications

|       |  |   |
|-------|--|---|
| Panel | Type                                     | Active matrix, thin film transistor (TFT)                         |
|       | Viewable Image Area (diagonal)           | 17 in (43.2 cm)   |
|       | Screen Opening (WxH)                     | 13.4 x 10.7 in (34.0 x 27.2 cm)                                   |
|       | Viewing Angle (typical)*                 | Up to 160° horizontal/160° vertical (10:1 minimum contrast ratio) |
|       | Brightness (typical)*                    | 300 nits (cd/m <sup>2</sup> )                                     |
|       | Contrast Ratio (typical)*                | 800:1   |
|       | Response Rate (typical)*                 | 5 ms (rise + fall)  |
|       | Pixel Pitch                              | 0.264 mm  |
|       | Backlight Lamp Life (to half brightness) | 40K hours   |

\* All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

|                    |                    |   |
|--------------------|--------------------|---|
| Video/Other Inputs | Plug and Play      | Yes (supports VESA DDC2B and DDC/CI; PC2001 compliant)            |
|                    | USB 2.0 Hub        | Self-powered; one upstream, two downstream ports (cable included) |
|                    | Input Signal       | Two connectors: one 15-pin mini D-sub analog VGA and one DVI-D    |
|                    | Input Impedance    | 75 ohms $\pm$ 2%  |
|                    | Sync Input         | Separate sync (HSYNC/VSYNC)                                       |
|                    | Video Cable        | 15-pin D-sub mini connector; detached                             |
|                    | Video Cable Length | 70.9 in (1.8 m); detached   |

|                                  |  |   |
|----------------------------------|--|---|
| Signal Interface/<br>Performance | Horizontal Frequency                       | 30 to 83 kHz                              |
|                                  | Vertical Frequency                         | 56 to 76 Hz                               |
|                                  | Native Resolution                          | 1280 x 1024 @ 60 Hz (analog)              |
|                                  |  | 1280 x 1024 @ 60 Hz (digital)             |
|                                  | Max Resolution (Analog)                    | 1280 x 1024 @ 75 Hz                       |
|                                  | Max Resolution (Digital)                   | 1280 x 1024 @ 75 Hz                       |
|                                  | Preset VESA Graphic Modes (non-interlaced) | 640 x 480 @ 60 Hz, 72 Hz, 75 Hz           |
|                                  |  | 720 x 400 @ 70 Hz                         |
|                                  |  | 800 x 600 @ 60 Hz, 72 Hz, 75 Hz           |
|                                  |  | 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz          |
|                                  |  | 1280 x 1024 @ 60 Hz, 75 Hz                |
|                                  | Preset MAC Mode                            | 832 x 624 @ 75 Hz                         |
|                                  |  | 1152 x 870 @ 75 Hz                        |
|                                  | Preset SUN Mode                            | 1152 x 900 @ 76 Hz                        |
|                                  | Fail Safe Mode                             | Yes (limits out of range signal messages) |
|                                  | Maximum Pixel Clock Speed                  | 140 MHz                                   |
|                                  | User Programmable Modes                    | Yes, 15                                   |
| Anti-Glare                       | Yes  |   |

### Technical Specifications

|                            |   |
|----------------------------|---|
| Anti-Static                | Yes   |
| AssetControl               | Yes (accessible on HP Compaq Business Desktops featuring HP Client Manager) |
| Default Colour Temperature | 6500° Kelvin  |

|                                  |                      |   |
|----------------------------------|----------------------|---|
| On Screen Display (OSD) Controls | Buttons and Switches | 4-button OSD (auto-adjust, menu, minus, plus); power on/off; second-level OSD buttons include dual-input switch   |
|                                  | Languages            | English, Spanish, French, German, Dutch, Italian, Simplified Chinese  |
|                                  | User Controls        | Size and positioning, contrast, brightness, clock, clock phase, selectable colour temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual colour contrast, full-screen resolution |

|                    |                           |  |
|--------------------|---------------------------|--|
| Power              | Power Supply              | Auto-ranging, 90 to 265 VAC; internal power supply       |
|                    | Input Power               | 100 ~ 240 VAC  |
|                    | Nominal Current           | 1.5 A maximum  |
|                    | Frequency                 | 50 ~ 60 Hz   |
|                    | Avg. Power Consumption    | ~33 watts (when displaying standard office applications) |
|                    | Typ. Power Consumption    | < 40 watts   |
|                    | Max. Power Consumption    | < 60 watts   |
|                    | Power Saving Mode         | < 2 watts  |
|                    | Off Mode                  | < 2 watts  |
| Power Cable Length | 74.8 in (1.9 m); detached |  |

|            |   |   |   |
|------------|---|---|---|
| Mechanical | Dimensions (H x W x D)                        | Packaged  | 17.5 x 17.5 x 8.5 in (44.5 x 44.5 x 21.6 cm)  |
|            |   | Unpacked with stand (minimum height)              | 13.8 x 14.6 x 10.5 in (35.1 x 37.1 x 26.7 cm) |
|            |   | Unpacked with stand (maximum height)              | 19.3 x 14.6 x 9.75 in (49.0 x 37.1 x 24.8 cm) |
|            |   | Base area (footprint)                             | 11.75 x 9.75 in (29.8 x 24.8 cm)              |
|            |   | Panel only (without stand)                        | 12.4 x 14.6 x 2.5 in (31.5 x 37.1 x 6.4 cm)   |
|            |   | Weight  | Packaged                                      |
|            |   | Unpacked with stand                               | 15.4 lb (7.0 kg)                              |
|            |   | Panel Only (without stand)                        | 8.3 lb (3.76 kg)                              |
|            | Bezel Width                                   | 17 mm left and right, 17 mm top, and 24 mm bottom |   |
|            | Tilt Range                                    | -5° to +35°                                       |   |
|            | Swivel Range                                  | ± 170° horizontal swivel                          |   |
|            | Height Adjustable                             | Yes (5.1 in/13 cm adjustment range)               |   |
|            | Pivot Rotation                                | Yes, 90° into portrait orientation                |   |
| Base       | Ships attached and is removable (four screws) |   |   |

|               |                         |                            |
|---------------|-------------------------|----------------------------|
| Environmental | Temperature – Operating | 41° to 95° F (5° to 35° C) |
|---------------|-------------------------|----------------------------|

### Technical Specifications

|                             |                                |
|-----------------------------|--------------------------------|
| Temperature – Non-operating | -4° to 140° F (-20° to 60° C)  |
| Humidity – Operating        | 20% to 80%, non-condensing     |
| Humidity – Non-operating    | 5% to 90%                      |
| Altitude – Operating        | 0 to 12,000 ft (0 to 3,658 m)  |
| Altitude – Non-operating    | 0 to 40,000 ft (0 to 12,192 m) |

### Environmental Data

**Eco-Label Certifications and Declarations** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- ENERGY STAR®
- IT ECO declaration
- TCO 03
- CECP

| Energy Consumption<br>(in accordance with US ENERGY STAR test method) | AC Input Voltage at 100 VAC +/- 5 VAC, 50 Hz +/- 3 Hz | AC Input Voltage at 115 VAC +/- 5 VAC, 60 Hz +/- 3 Hz | AC Input Voltage at 230 VAC +/- 5 VAC, 50 Hz +/- 3 Hz |
|---|---|---|---|
| Normal Operation  | 24 watts  | 24 watts  | 24 watts  |
| Sleep   | 0.7 watts   | 0.8 watts   | 1.0 watts   |
| Off   | 0.7 watts   | 0.7 watts   | 0.9 watts   |
| Heat Dissipation*   | 100 VAC, 50 Hz  | 115 VAC, 60 Hz  | 230 VAC, 50 Hz  |
| Normal Operation  | 82.1 BTU/hr   | 82.1 BTU/hr   | 82.1 BTU/hr   |
| Sleep   | 2.4 BTU/hr  | 2.7 BTU/hr  | 3.4 BTU/hr  |
| Off   | 2.4 BTU/hr  | 2.4 BTU/hr  | 3.1 BTU/hr  |

**\*NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

**Longevity and Upgrading** Upgradeability features contained in the product include:

- Two USB ports

**Ergonomics** The monitor meets the ergonomic requirement of EN-ISO 13406-2 for flat panel displays.

**Additional Information** This product is in compliance with the Restrictions of Hazardous Substances (RoHS) Directive, 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive, 2002/96/EC.

Display meets ENERGY STAR requirement for capability of going to low power state(s) as controlled by CPU Power Management settings.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Display meets the requirement for low frequency electromagnetic fields per

### Technical Specifications

|                       |   |
|-----------------------|---|
|                       | <p>TCO.</p> <p>This product contains 0% recycled materials (by wt.)</p> <p>This product is 98% recyclable when properly disposed of at end of life.</p> <p>Packaging Materials</p> <ul style="list-style-type: none"><li>● Corrugated – 0.95 kg</li><li>● Plastic (other) – 0.142 kg</li><li>● Polystyrene – 0.664 kg</li></ul>   |
| <b>Material Usage</b> | <p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html">www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html</a>):</p> <ul style="list-style-type: none"><li>● Asbestos</li><li>● Certain Azo Colorants</li><li>● Certain Brominated Flame Retardants – may not be used as flame retardants in plastics</li><li>● Cadmium</li><li>● Chlorinated Hydrocarbons</li><li>● Chlorinated Paraffins</li><li>● Formaldehyde</li><li>● Halogenated Diphenyl Methanes</li><li>● Lead carbonates and sulfates</li><li>● Lead and Lead compounds</li><li>● Mercuric Oxide Batteries</li><li>● Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.</li><li>● Ozone Depleting Substances</li><li>● Polybrominated Biphenyls (PBBs)</li><li>● Polybrominated Biphenyl Ethers (PBBEs)</li><li>● Polybrominated Biphenyl Oxides (PBBOs)</li><li>● Polychlorinated Biphenyl (PCB)</li><li>● Polychlorinated Terphenyls (PCT)</li><li>● Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.</li><li>● Radioactive Substances</li><li>● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)</li></ul> |
| <b>Packaging</b>      | <p>HP follows these guidelines to decrease the environmental impact of product packaging:</p> <ul style="list-style-type: none"><li>● Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.</li><li>● Eliminate the use of ozone-depleting substances (ODS) in packaging materials.</li><li>● Design packaging materials for ease of disassembly.</li><li>● Maximize the use of post-consumer recycled content materials in packaging materials.</li><li>● Use readily recyclable packaging materials such as paper and</li></ul>   |

### Technical Specifications

|                |  |   |
|----------------|--|---|
|                |  | corrugated materials.   |
|                |  | <ul style="list-style-type: none"><li>● Reduce size and weight of packages to improve transportation fuel efficiency.</li><li>● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.</li></ul>   |
|                | <b>End-of-life Management and Recycling</b>  | Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.  |
|                | <b>Hewlett-Packard Corporate Environmental Information</b>                         | For more information about HP's commitment to the environment: Global Citizenship Report<br><a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a><br>Eco-label certifications<br><a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a><br>ISO 14001 certificates:<br><a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a>   |
| <b>Options</b> | <b>HP Silver LCD Speaker Bar – Part number: EE418AA</b>                            | Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the QuickSpec document.  |
|                | <b>HP Compaq dc7800 Series Integrated Work Centre Stand – Part number: GN783AA</b> | Allows mounting of a 17- or 19-inch HP LCD monitor and an HP Compaq dc7800 Ultra-slim Desktop PC or HP thin client on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document.   |
|                | <b>HP LCD Monitor Quick Release – Part number EM870AA*</b>                         | An easy-to-use, VESA-compliant, flat panel monitor mounting solution that allows you to quickly and securely attach a flat panel monitor to a variety of stands, brackets, arms or wall mounts. For more information, refer to this product's QuickSpec document.   |
|                |  | <p>* The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) depending upon the mounting configuration used. Please note this is a total weight limit for all devices mounted, i.e. the combined weight of the monitor and a second device such as the HP thin client cannot exceed 24 pounds. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.</p> |
| <b>Other</b>   | <b>Accessories Included</b>  | VGA cable, AC power cord, USB cable, user CD-ROM  |
|                | <b>Software</b>  | HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.   |

### Technical Specifications

HP Display Assistant is a software utility that allows monitor adjustment and colour calibration using the Display Data Channel Command Interface (DDC/CI) protocol of the connected PC.

|                               |  |
|-------------------------------|--|
| <b>User Guide Languages</b>   | English, French, German, Spanish, Italian, Dutch, Brazilian Portuguese, Danish, Finnish, Greek, Japanese, Korean, Latin American Spanish, Norwegian, Polish, Russian, Slovenian, Turkish, Swedish, Traditional Chinese, Simplified Chinese |
| <b>Warranty Languages</b>     | English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, Simplified Chinese                              |
| <b>Colour</b>                 | Carbonite black and silver (two-tone)  |
| <b>VESA External Mounting</b> | Yes (standard 4 hole pattern, 100 mm); base must first be removed  |
| <b>Kensington Lock-Ready</b>  | Yes  |

### Certification and Compliance

Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, ENERGY STAR® qualified, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification, Windows Vista® Certification

### Compatibility

VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP L1740 17-inch LCD Monitor. Recommended for use with HP products.

### Service and Warranty

Three years parts, labour, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion.\* With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

\* Service levels and response times for HP Care Packs may vary depending on your geographic location. Restrictions and limitations apply. For details, visit [www.hp.com/go/carepack](http://www.hp.com/go/carepack).

© Copyright 2008 Hewlett-Packard Development Company, L.P.

Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries. Windows Vista is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. ENERGY STAR is a registered mark owned by the U.S. government.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.