



PA919SD



PA919



PA919PS



**Thank you
for choosing
the Q319
microphone.**

It is designed to provide wireless audio transmission to these pictured Califone UHF PAs including the PA919SD, PA919, PA919PS and it can be used for indoor and outdoor applications.

Califone® International Inc.
1145 Arroyo Avenue, # A
San Fernando, CA 91340 USA
Toll Free 800.722.0500 | Toll Free Fax 877.402.2248
International Customers call 818.407.2400
or Fax 818.407.2405
califone.com
califonepro.com



Q319 Microphone

900MHz Frequency

Owner's Manual





Q319 Microphone Owner's Manual

Thank you for choosing this Califone microphone. It is designed to provide wireless audio transmission to the Califone PA919SD, PA919, PA919PS PAs. It can be used for indoor and outdoor applications.

We encourage you to visit our website to register your model for its warranty coverage at califone.com/register, and while there please learn more about the complete line of Califone audio visual products including: Portable and wireless PA systems, infrared classroom audio systems, MP3 player/recorder, multi-media players and recorders, headphones & headsets, computer peripheral equipment, visual presentation products & language learning materials.

Warranty Registration

Califone warrants this microphone to be free from defective material and workmanship for one year from the purchase date. Our "Project Intercept" Customer Satisfaction program will replace defective parts and repair malfunctioning products under this warranty when the defect occurs under normal use, provided the unit is returned to our factory via prepaid transportation only after the factory issues an RA (Return Authorization) number which must be clearly written on the outside of the box.

All Damage Claims Must Be Made With The Freight Carrier

Notify the freight carrier immediately if you observe any damage the shipping carton or product. Repack the unit in the carton and await inspection by the carrier's claim agent. Notify your dealer of the pending freight claim.

Returning Your Unit For Service or Repairs

Should your unit require service, contact your dealer or call Califone directly (Customer Service Department) at (800) 722-0500 to first obtain a Return Authorization (RA) number or via email warranty@califone.com

Damage Requiring Service

The microphone should be serviced by qualified personnel when:

- Objects have fallen or liquid has been spilled into the microphone
- It has been exposed to rain
- It does not appear to be operating normally or exhibits a marked change in performance
- It has been dropped or the enclosure damaged

All shipments to Califone must include the RA number clearly marked on the exterior of the shipping carton and must shipped prepaid. C.O.D. shipments will be refused and returned at your cost.

Servicing

The user should not attempt to service the microphone beyond that described in the operating instructions. For all other servicing, refer to qualified service personnel.


The Q319 works with the PA919 series and M319. It is not compatible with the PA916 series, M-316 and Q-316 microphone.

Features

1. Channel LCD display
 - a. Left digit denotes group number
 - b. Right digit denotes channel number
2. Group set button and Group/Channel adjust (UP)
3. Channel set button and Group/Channel adjust (DOWN)
4. Power switch

- Rugged exterior mesh protects cartridge and eliminates "popping" noise
- Battery compartment (unscrews to replace 9V battery)

The Q319 mic has a 50' wireless transmission range.

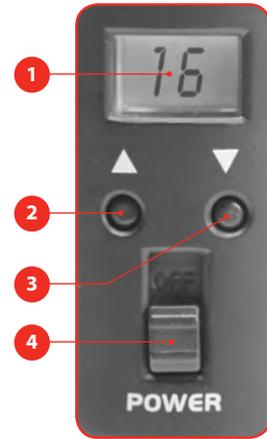

Instructions

The frequency of the mic must first be set to the same frequency of the receiving PA in order for the Q319 to function. The following are instructions to change the frequency of the microphone.

1. Unscrew the battery cover, insert the 9V battery and then reinstall the battery cover
2. Turn on the power by moving the power switch to the "up" position. The display will automatically show the previous group and channel setting prior to being turned off.
3. To adjust the Group Number, depress the group button for 3 seconds or until its LCD number begins to flash. Once flashing, release the group button and the group number can now be changed. Pressing it again moves the number UP and pressing the channel button moves the group number DOWN.
4. To adjust the Channel Number, depress the channel button for 3 seconds or until its LCD number begins to flash. Once flashing, release the channel button and the channel number can now be changed. Pressing it again moves the number DOWN and pressing the group button moves the channel number UP.
5. After adjusting the Group or Channel numbers, release all buttons. The group or channel will flash for 3 seconds and will then stop, indicating the frequency is now locked and saved into memory.

- The LCD will display the available battery power if no buttons are pushed after 30 seconds. Briefly pressing either the group or channel buttons will change the LCD display to showing the Group and Channel numbers.
- If the LCD display shows "LO", it means the battery power is nearly exhausted and the battery needs replacing within the next three minutes. If the battery is not replaced within three minutes, the microphone will stop working.
- Remove the battery from the microphone if the microphone will not be used for an extended period of time.
- A note about feedback – do not stand within 10' of the front of a PA with the wireless mic on. The mic will pick up sounds from the PA and this begins the cycle resulting in feedback. Stand either further away from the PA, to the side, or behind it to avoid this condition.

visit us online at califone.com